



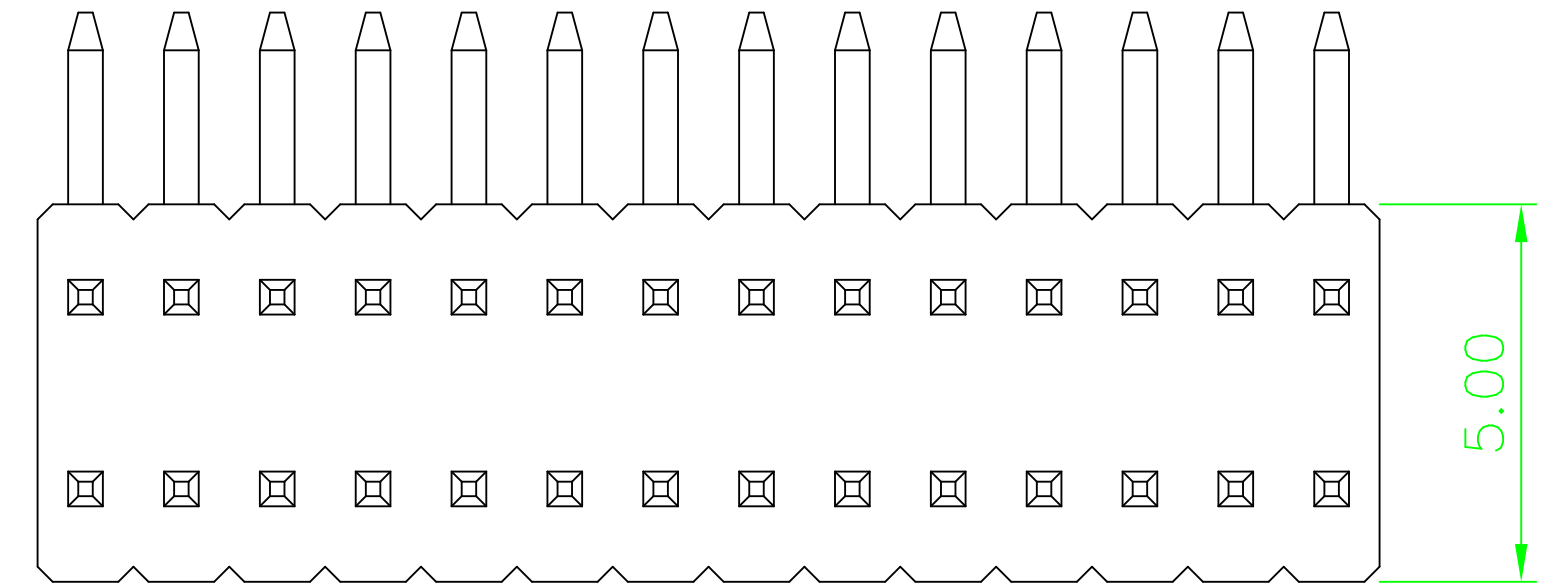



Recommended P.C.B. Layout

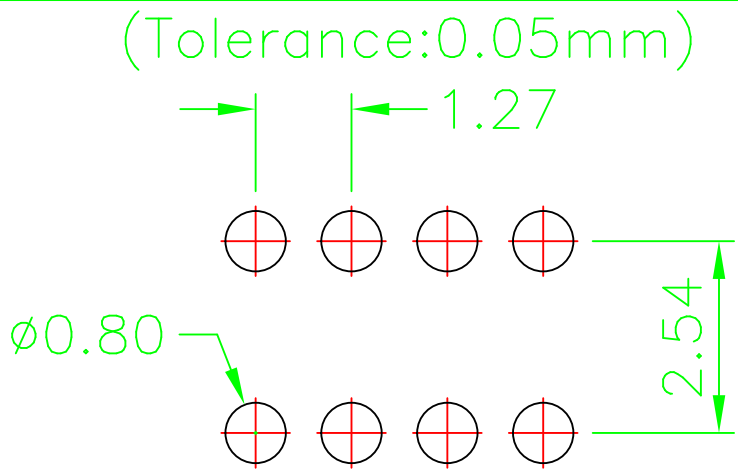

Specifications
Current Rating: 1Amp
Insulation Resistance: 1000MΩ Min.
Dielectric Withstanding: 300V AC/DC
Contact Resistance: 20mΩ Max.
Operating Temperature:−40℃ to +105℃

Materials
Contact Material: Phosphor Bronze
Insulation Material: Polyester, UL 94V−0 LCP

All materials must be Geron materials

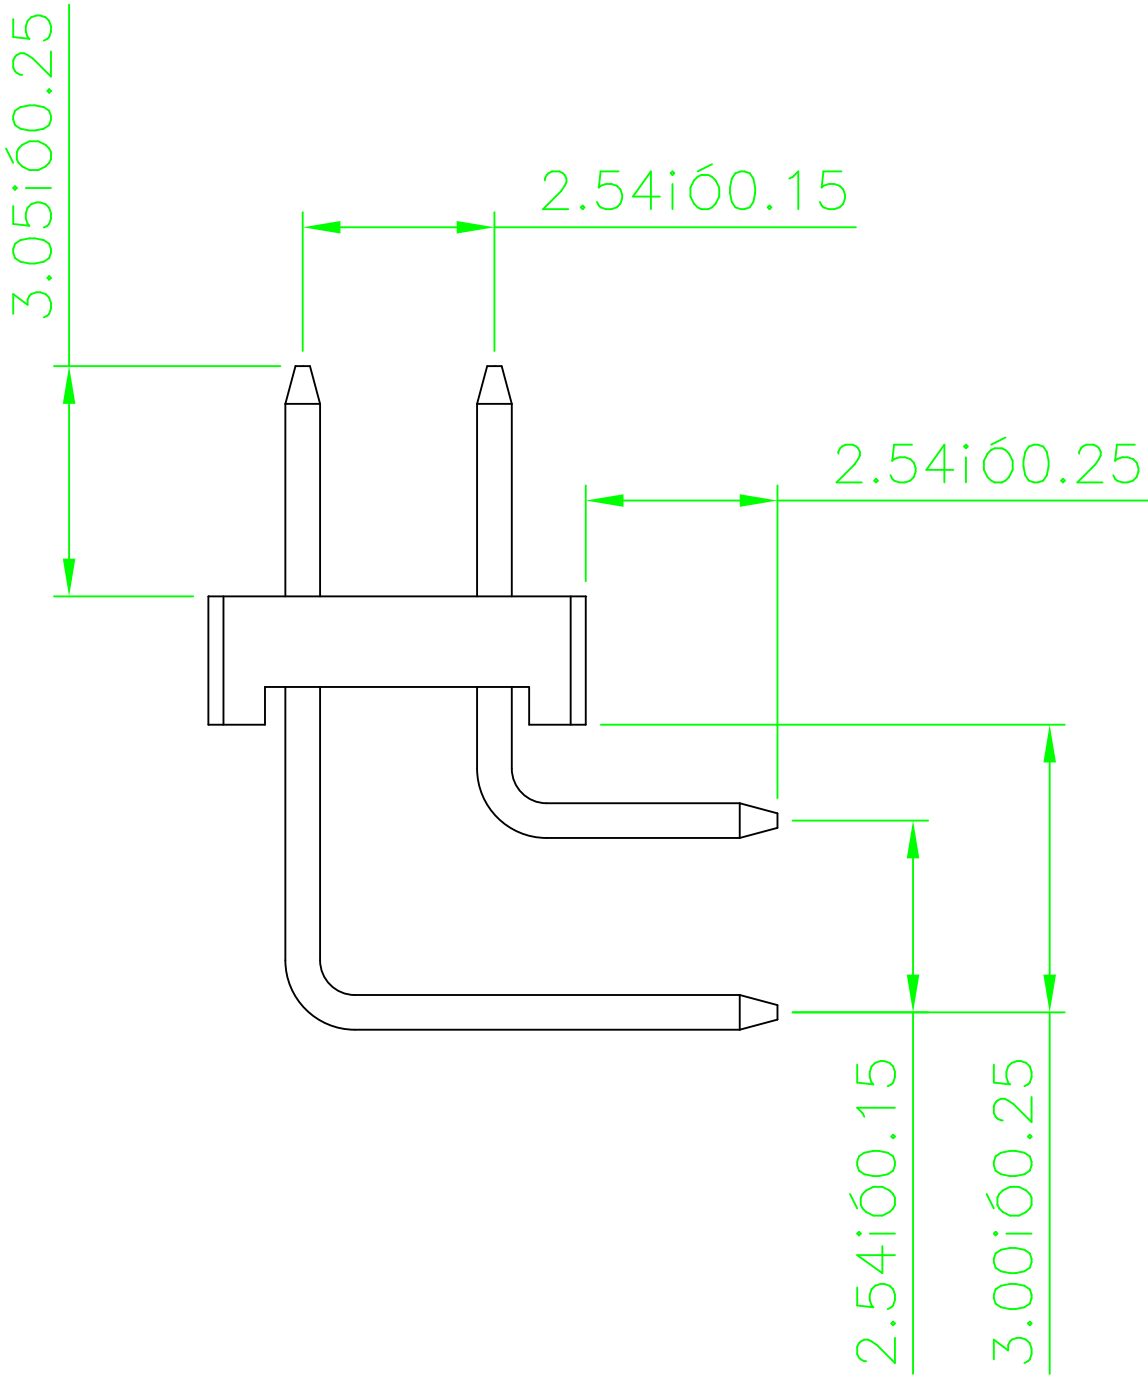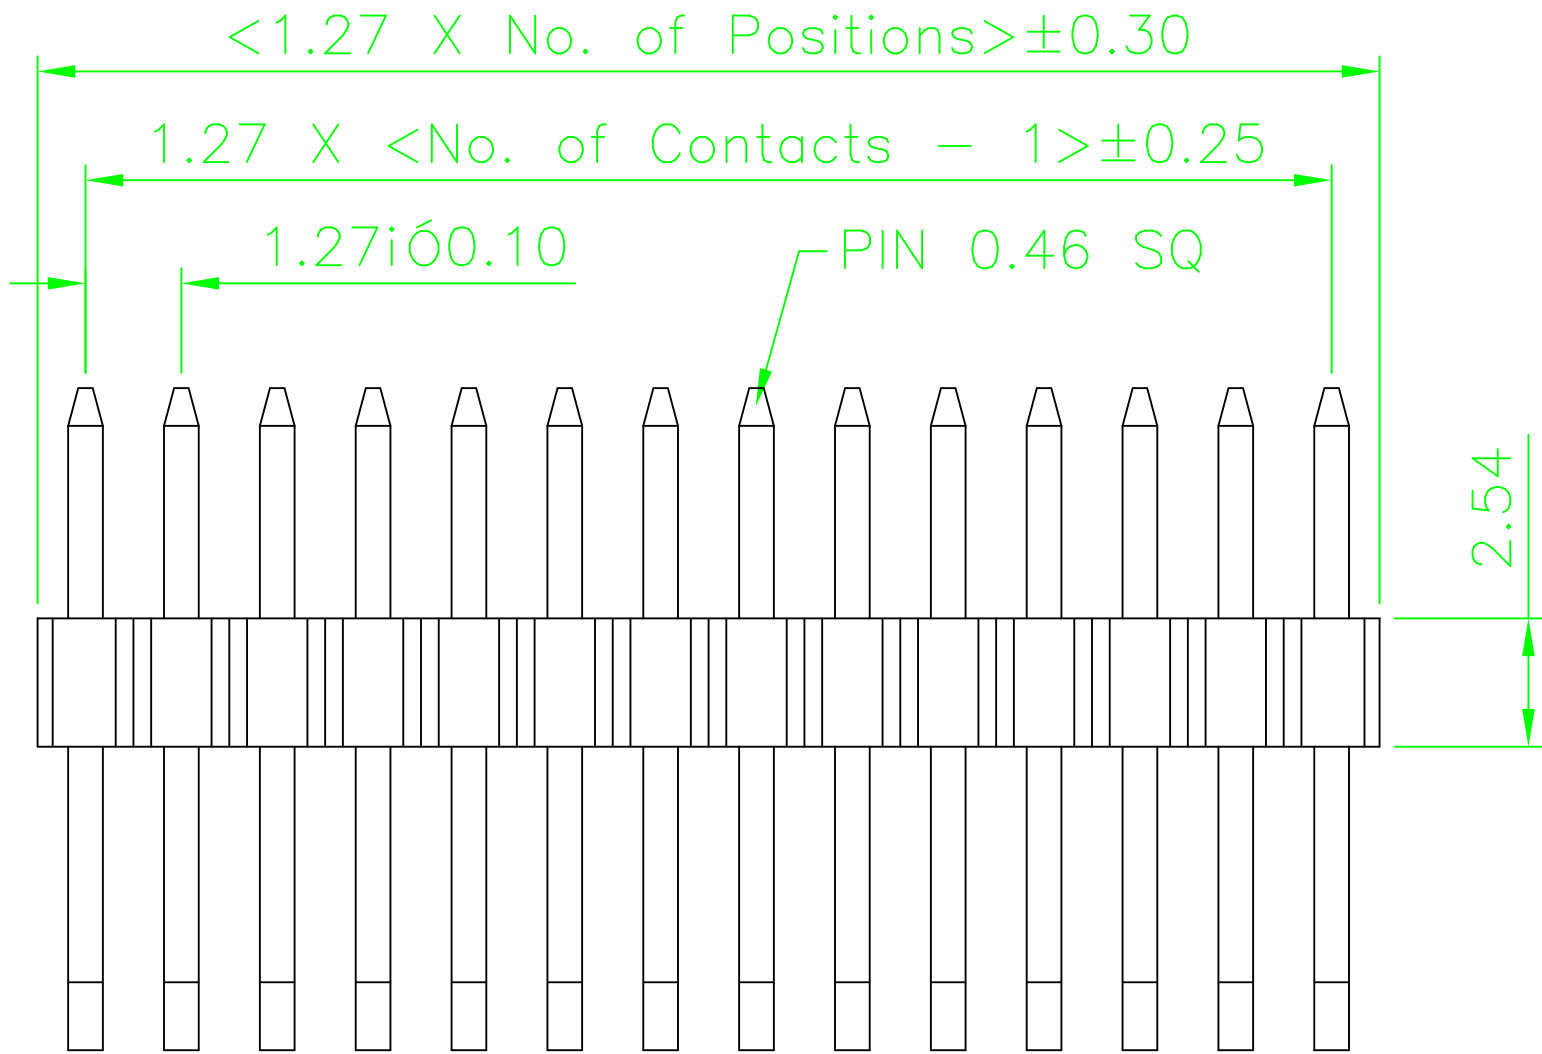

Ordering Information

GRA52 - XX XX W001

No. of Pins per Row
02~50

Contact Plating
01=Tin
02=Gold Flash
Duplex plating
05=Gold Flash /Tin
...

GERON ELECTRONIC CO., LTD					GENERAL TOLERANCE		DESIGN: 許承佑	DATE: 2010.11.16	DWG. NO.	TITLE. 1.27*2.54 PIN HEADER DUAL ROWS SMT TYPE SIDE ENTRY
					X.° ± 5.0°	X. ± 0.30	CHECKED:	DATE:	GRA52-W001	
					.X° ± 3.0°	.X ± 0.25	AUDITED:	DATE:	PART NO.	
					.XX° ± 2.0°	.XX ± 0.15	APPROVED:	DATE:	GRA52-XX-XX-W001	
					.XXX° ± 1.0°	.XXX ± 0.10				
REV. 01	UNIT. mm	SCALE. 5:1	PAGE. 1/1							