

Specifications

Current Rating: 1.0Amp
 Insulation Resistance: 500MΩ Min.
 Dielectric Withstanding: 300VAC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C
 Max Process Temp: 230°C for 30~60 sec.


Materials

Contact Material: Phosphor Bronze
 Insulator Material: Polyester, UL 94V-0
 LCP

All materials must be Geron materials

Recommended P.C.Board

Hole Layout
 (Tolerance: ±0.05)

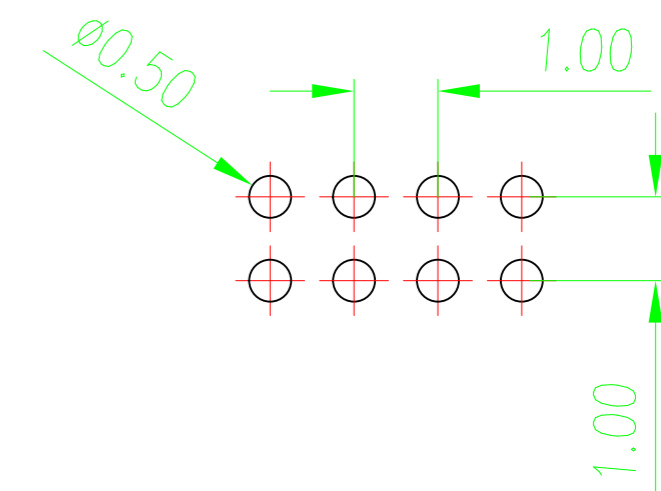

Ordering Information

GRA32 - XX XX Z01-2

No. of Pins per Row: 02~40
 Contact Plating:
 01=Tin
 02=Gold Flash Standard
 Duplex Plating
 05=Gold Flash/Tin
 ...

ELECTRONIC CO.,LTD	GENERAL TOLERANCE		DESIGN: ZHOU	DATE: 2011.11.20	DWG. NO.	TITLE: 1.00 PIN HEADER DUAL ROWS DIP TYPE BASE 1.50H
	X° ± 5°	X. ± 0.30	CHECKED:	DATE:	GRA32-Z01-2	
	.X° ± 2°	.X ± 0.20	AUDITED:	DATE:	PART NO.	
	.XX° ± 1°	.XX ± 0.15				