

**Specifications**  
 Current Rating: 1Amp  
 Insulation Resistance: 500MΩ Min.  
 Dielectric Withstanding: 600VAC  
 Contact Resistance: 20mΩ Max.  
 Operating Temperature: -40°C to +105°C


**Materials**  
 Contact Material: Phosphor Bronze  
 Insulator Material: Polyester, UL 94V-0  
 Nylon 6T  
 All materials must be Geron materials

### Ordering Information

GRA32- XX XX Z01

No. of Pins per Row: 02~40  
 Contact Plating: 01=Tin, 02=Gold Flash, 05=Gold/TIN, ...

Recommended P.C.Board  
 Hole Layout  
 (Tolerance: ±0.05)

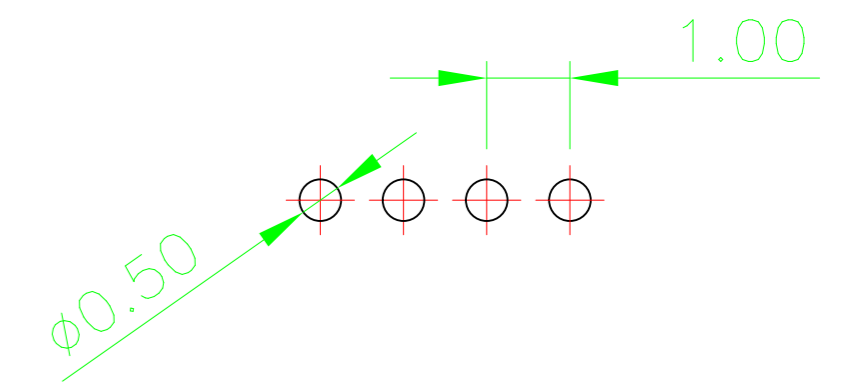

ON ELECTRONIC CO.,LTD		GENERAL TOLERANCE		DESIGN: ZHOU	DATE: 2011.11.20	DWG. NO.	TITLE: 1.00 PIN HEADER DUAL ROWS DIP TYPE PAGE 1/2011
UNIT.	SCALE.	PAGE.	X.° ± 5°	X. ± 0.30	CHECKED:	DATE:	
			.X° ± 2°	.X ± 0.20	AUDITED:	DATE:	
			.XX° ± 1°	.XX ± 0.15			