
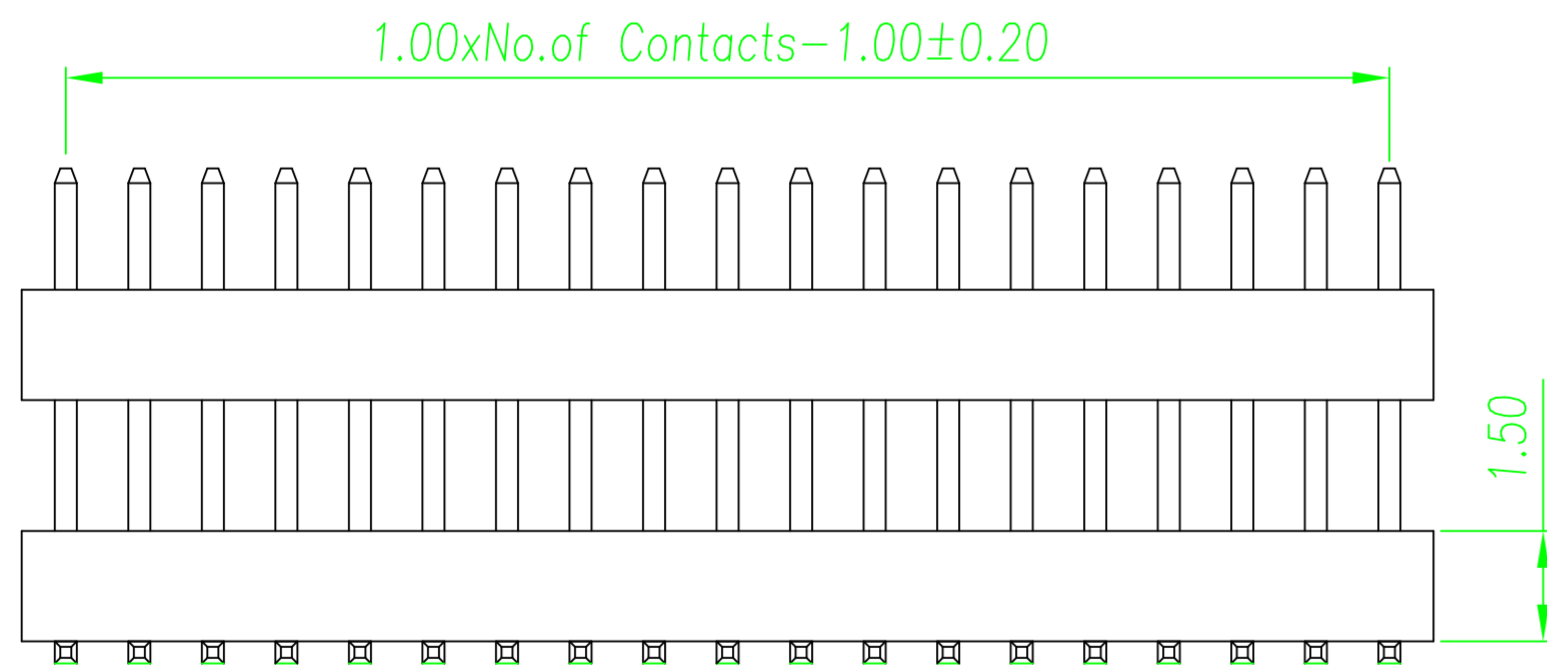


REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01		轉量產版發行	2011.06.08	ZHOU

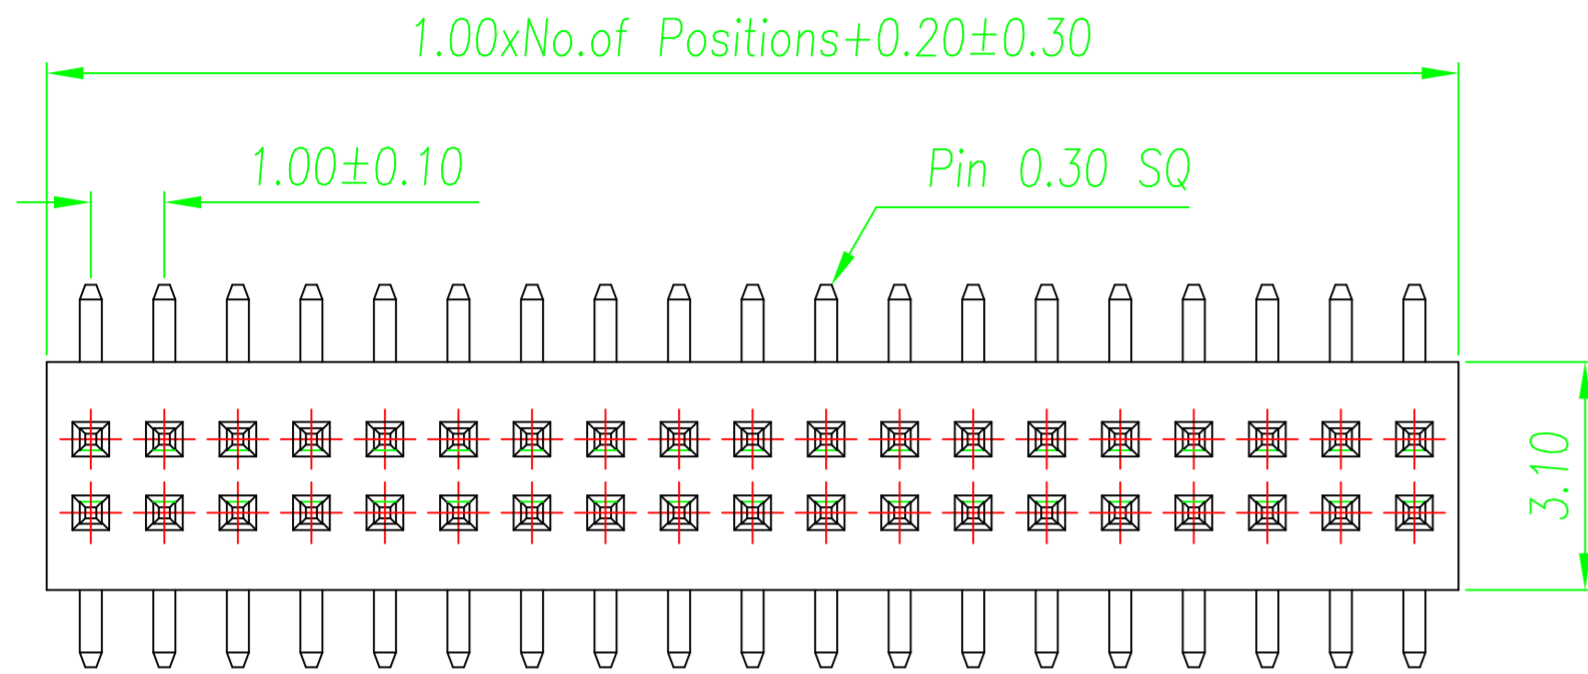

## Ordering Information



GRA32	-	XX		XX	ZS01	2
		No. of Pins per Row 02~40		Contact Plating 01=Tin 02=Gold Flash Duplex Plating 05=Gold Flash/Tin ...		

## Specifications

Current Rating: 0.5Amp  
 Insulation Resistance: 500M ΩMin.  
 Dielectric Withstanding: 200VAC  
 Contact Resistance: 20mΩ Max.  
 Operating Temperature: -40°C to +105°C  
 Max Process Temp: 230°C for 30~60 sec.  
 (260°C for 10 seconds)

## Materials

Contact Material: Phosphor Bronze.  
 Insulator Material: PA6T, UL 94V-0  
 All materials must be Geron materials

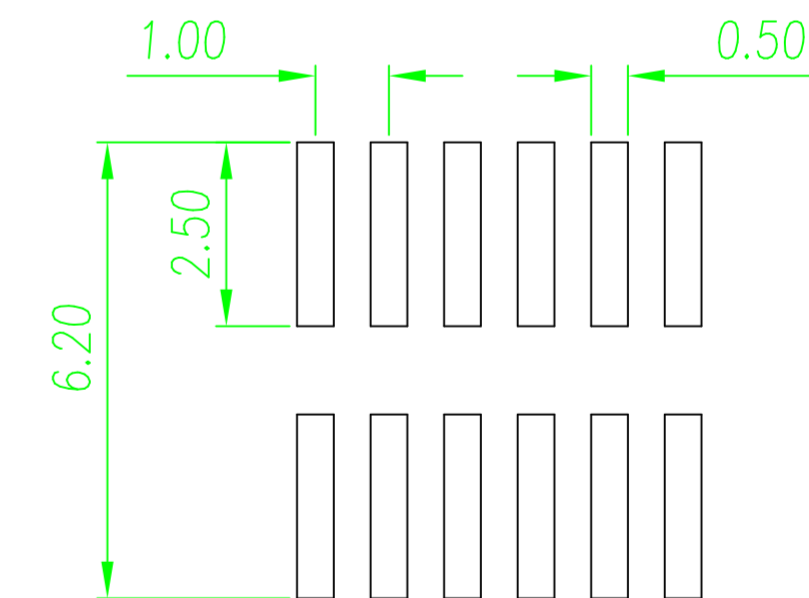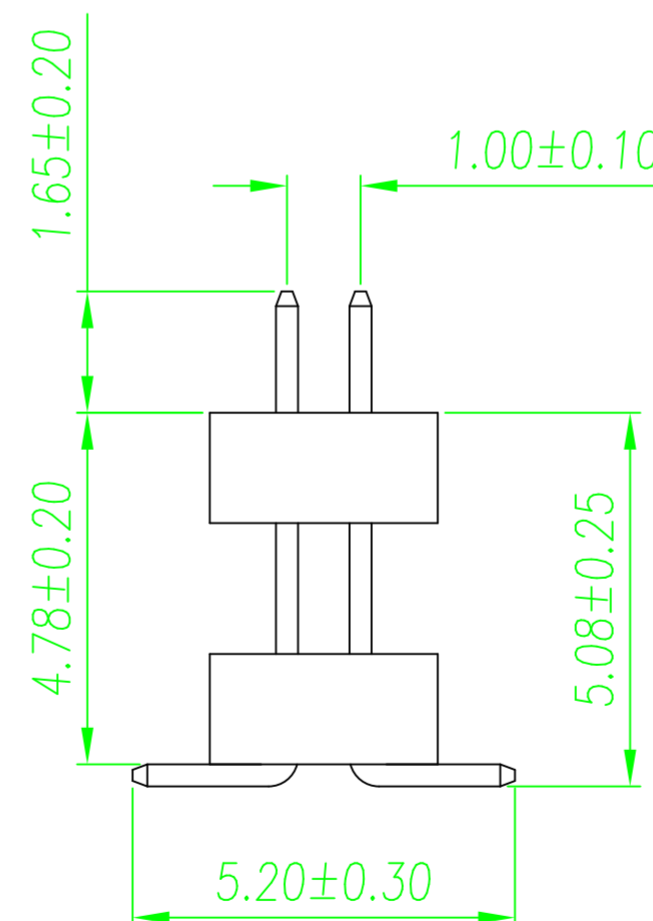

RECOMMENDED P.C.BOARD LAYOUT

<b>Geron Electronic Co.,Ltd</b>					GENERAL TOLERANCE		DESIGN: ZHOU	DATE: 2011.06.08	DWG. NO.	1.00 PIN HEADER DUAL ROWS SMT TYPE BASE 1.50H
					X° ± 5°	X. ±	CHECKED:	DATE:	GRA32-ZS01-2	
REV. 01	UNIT. mm	SCALE. 5:1	PAGE. 1/1	.X° ± 3°	.X ± 0.30	AUDITED:	DATE:	PART NO.		
				.XX° ± 2°	.XX ± 0.25	APPROVED:	DATE:	GRA32-XX-XX-ZS01-2		
				.XXX° ± 1°	.XXX ± 0.13					