
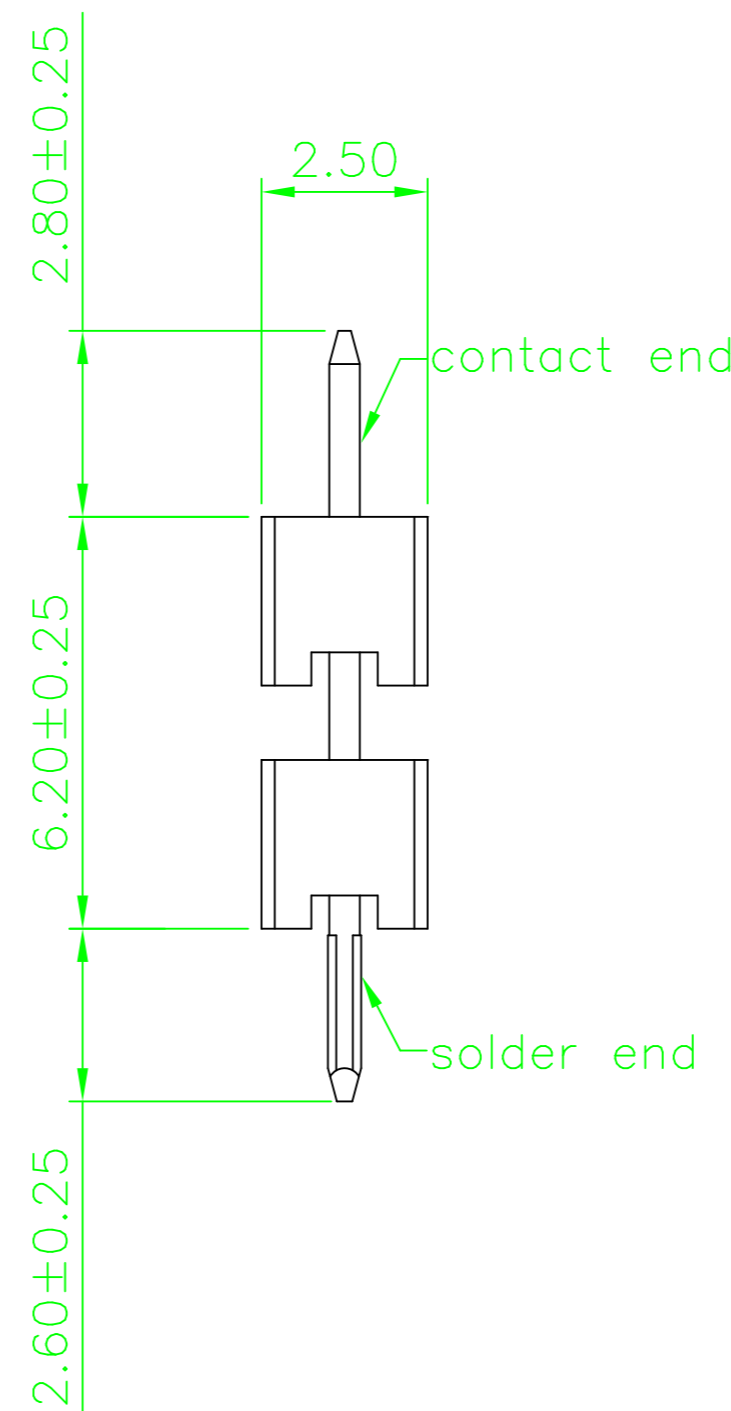
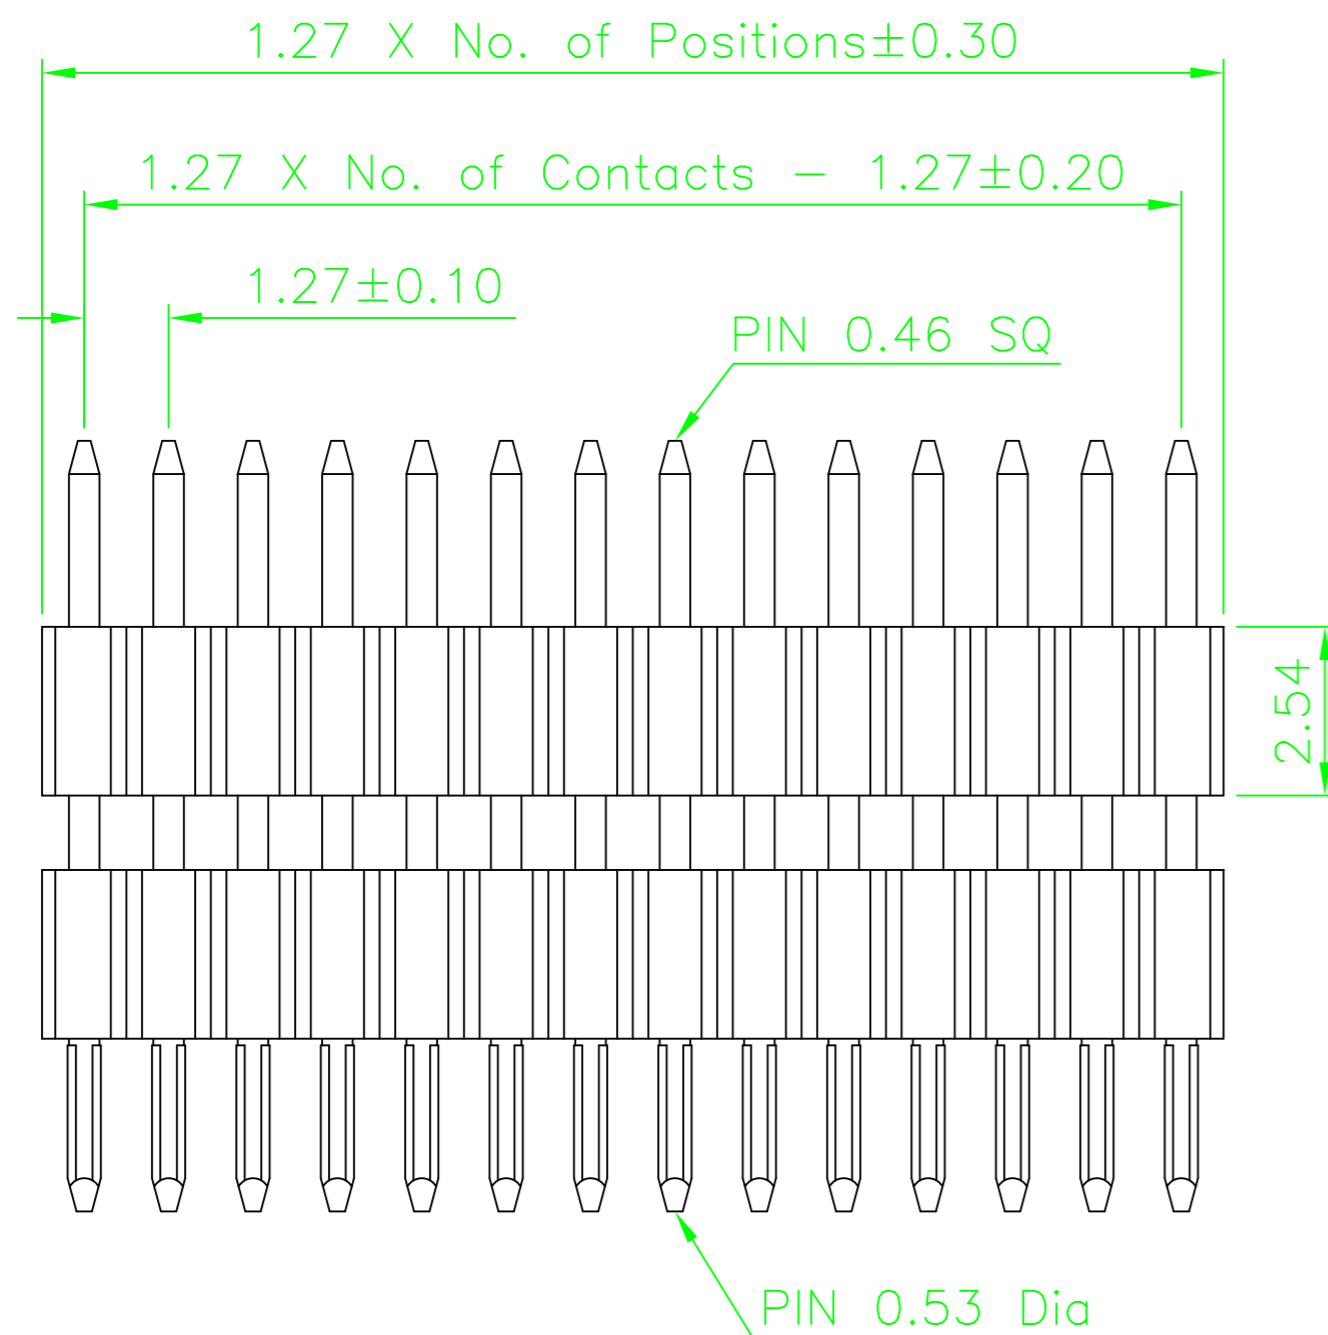


REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2010.10.12	LENGJIANJUN
02	△	變更塑膠用料	2010.10.12	WU

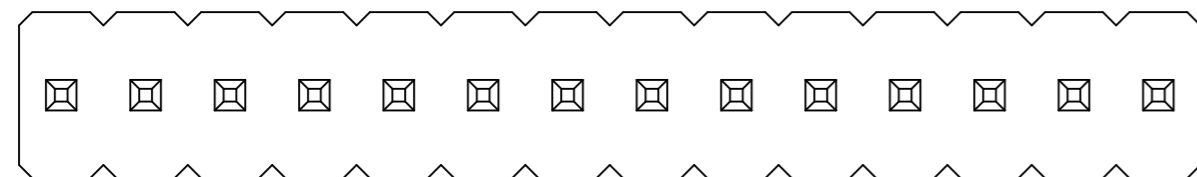

Specifications

Current Rating: 1Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 300V AC/DC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C
 Materials
 Contact Material: Phosphor bronze
 Insulation Material: Polyester, UL 94V-0
 △ LCP
 All materials must meet Geron requirement for environment protection


Ordering Information

GRA51 - XX XX Z01 S2

No. of Pins per Row: 02-50

Contact Plating:
 01=Tin
 02=Gold Flash
 Duplex plating
 05=Gold Flash /Tin

Recommended P.C.Board Hole Layout

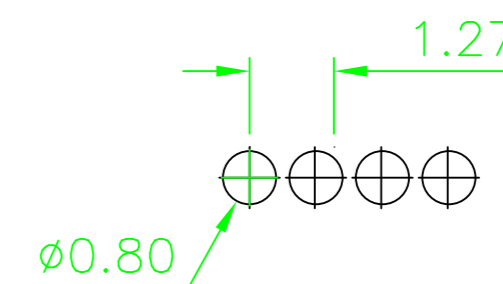

Geron Electronic Co.,Ltd

GENERAL TOLERANCE

X.° ± 5.0°	X. ± 0.30
.X° ± 3.0°	.X ± 0.25
.XX° ± 2.0°	.XX ± 0.15
.XXX° ± 1.0°	.XXX ± 0.10

DESIGN: ZHOU	DATE: 2010.10.12
CHECKED: WU	DATE: 2010.10.12
AUDITED: YANG	DATE: 2010.10.12
APPROVED: MEI	DATE: 2010.10.12

DWG. NO.	GRA51-Z01-S2
PART NO.	GRA51-XX-XX-Z014-S2

TITLE:
 1.27 PIN HEADER
 BOARD SPACER SINGLE
 ROW DIP TYPE

REV.	UNIT.	SCALE.	PAGE.
02	mm	5:1	1/1