
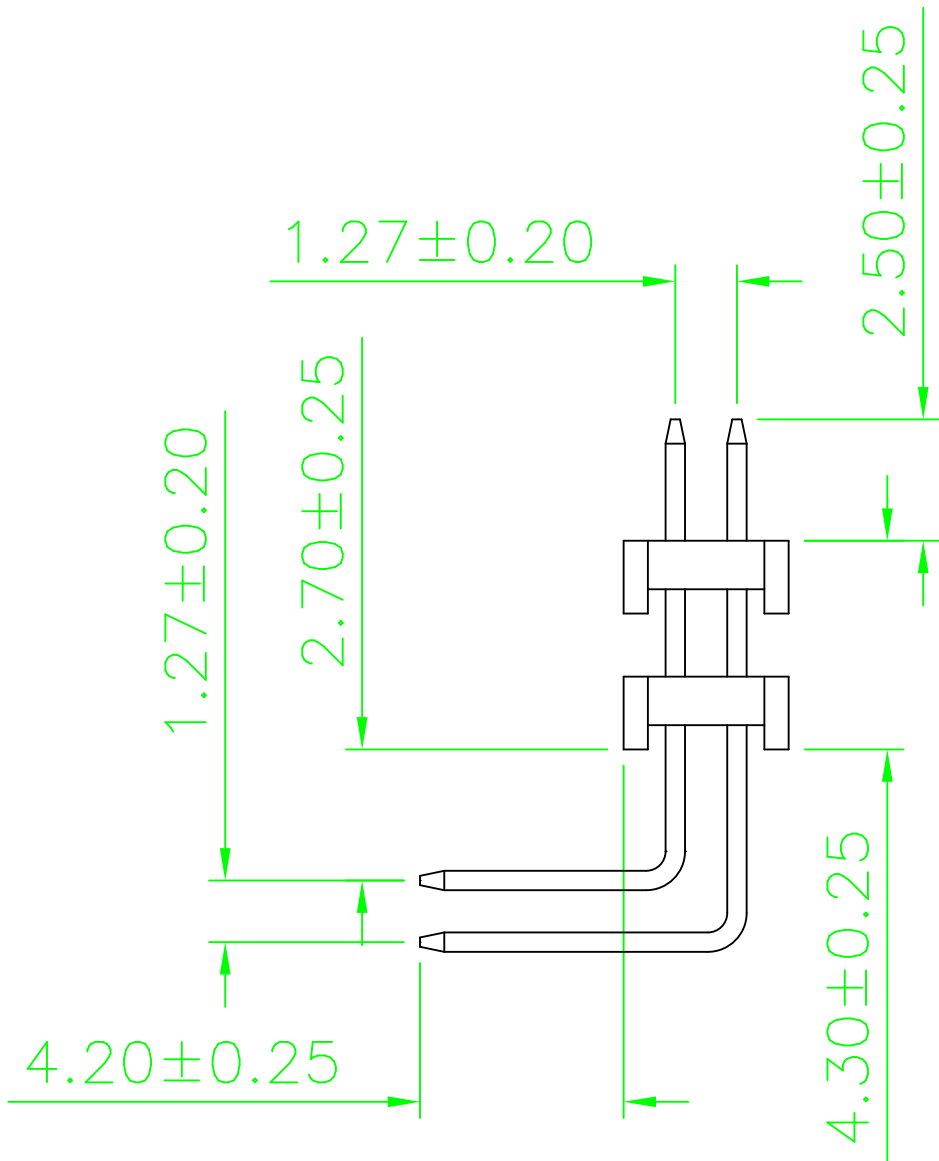


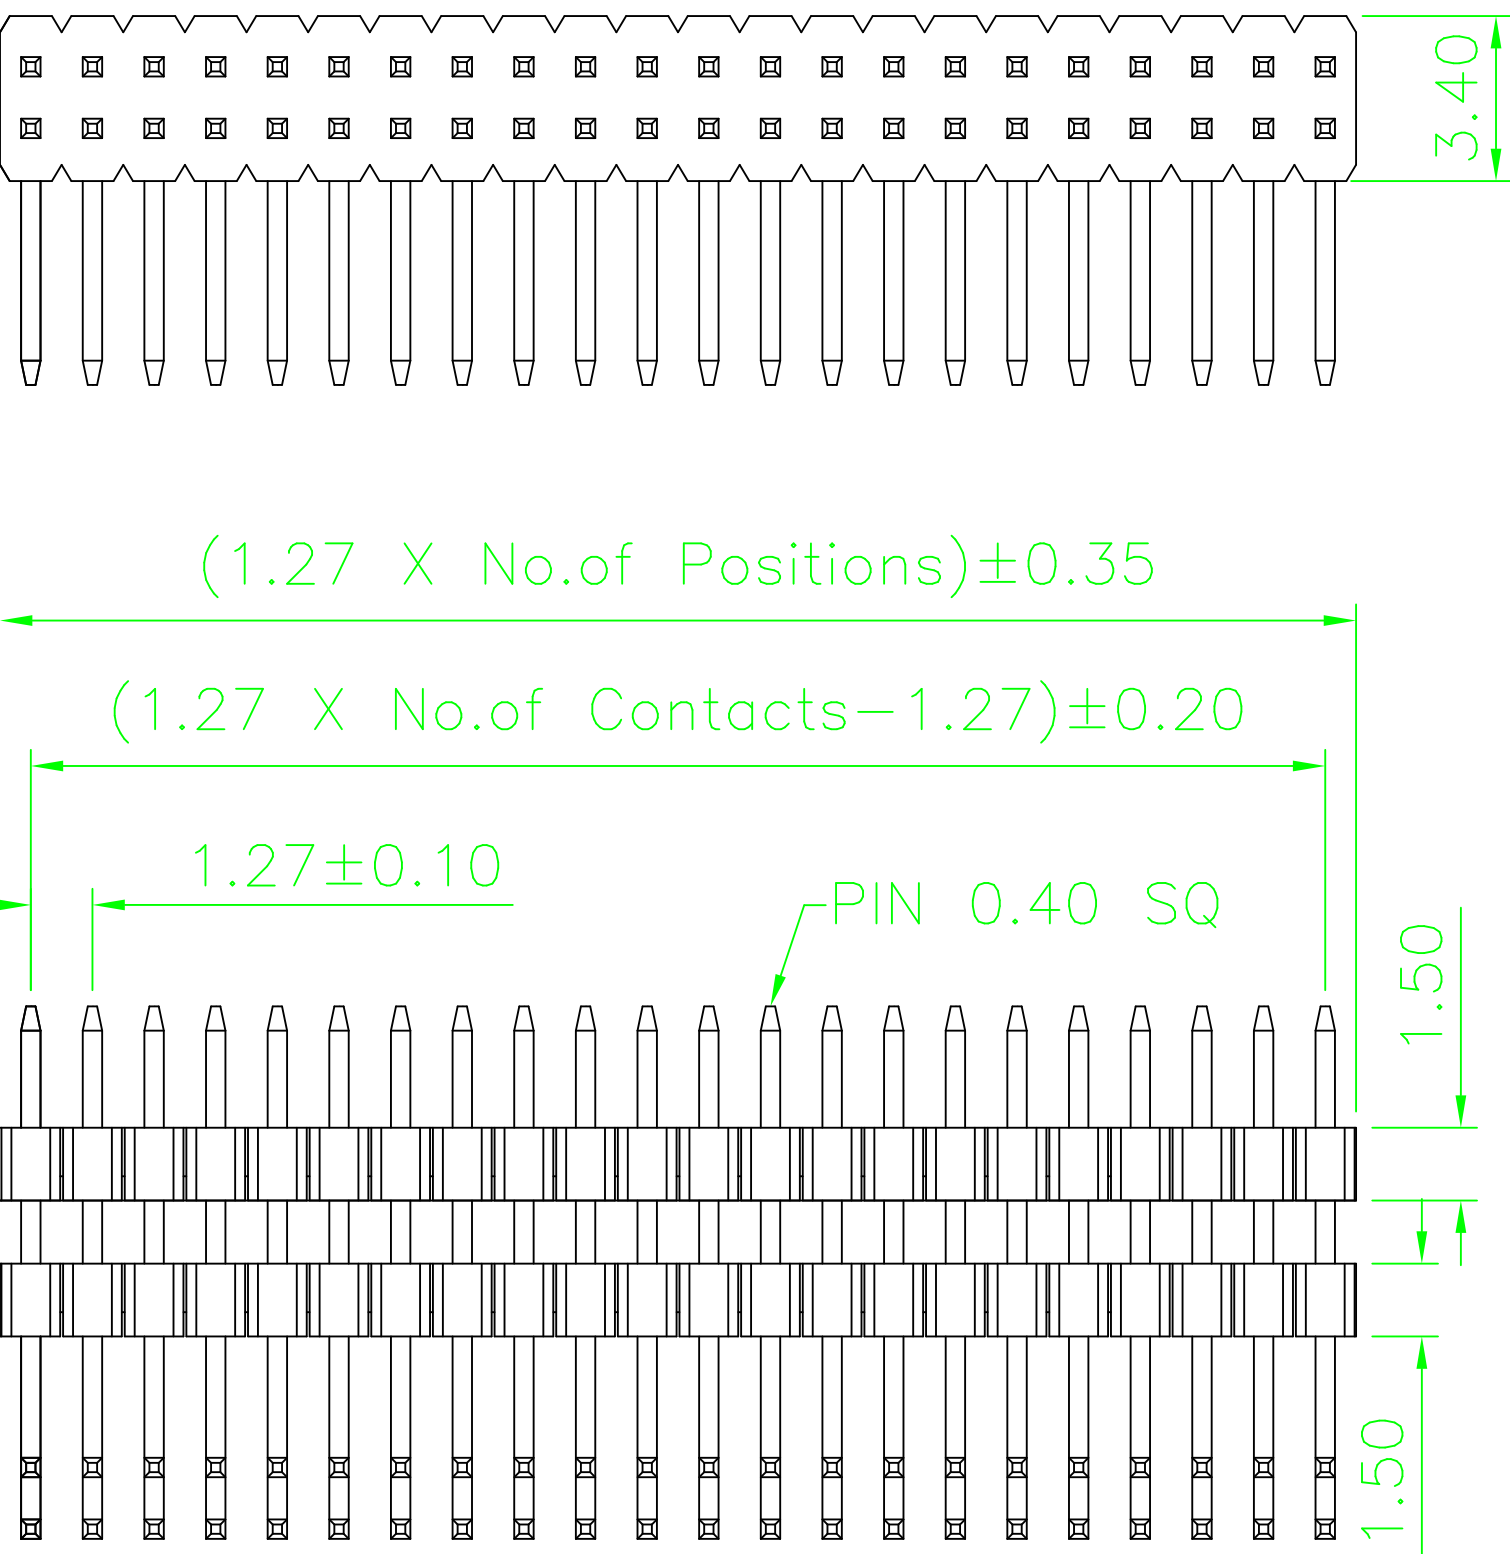

Specifications

Current Rating: 1Amp
Insulation Resistance: 1000MΩ Min.
Dielectric Withstanding: 300V AC/DC
Contact Resistance: 20mΩ Max.
Operating Temperature:−40℃ to +105℃

Materials

Contact Material: Brass
Insulation Material: Polyester, UL 94V-0
Nylon 6T
All materials must be Geron materials

Ordering Information


GRA52- XX XX W02 S2

No. of Pins per Row
02~50

Contact Plating
01=Tin
02=Gold Flash Standard
Duplex plating
05=Gold Flash /Tin
...

Recommended P.C.Board

Hole Layout

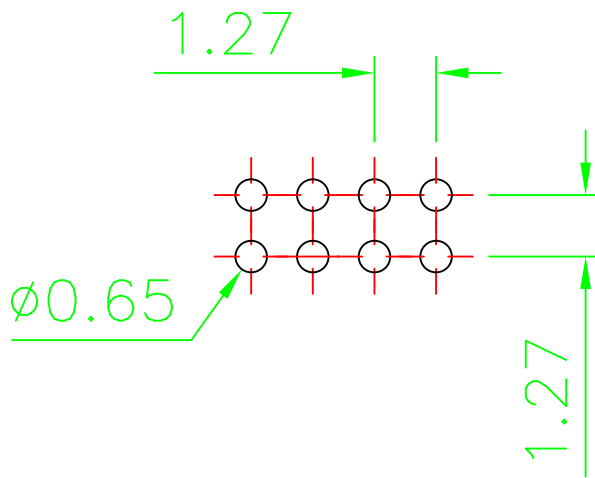

ON ELECTRONIC CO.,LTD					GENERAL TOLERANCE		DESIGN: ZHOU	DATE: 2010.9.21	DWG. NO. GRA52-W02-S2	TITLE. 1.27 PIN HEADER DUAL ROWS R/A TYPE PAGE 1/501
					X.° ± 5°	X. ± 0.30	CHECKED:	DATE:		
					.X° ± 2°	.X ± 0.20				
					UNIT.	SCALE.	PAGE.		.XX° ± 1°	