

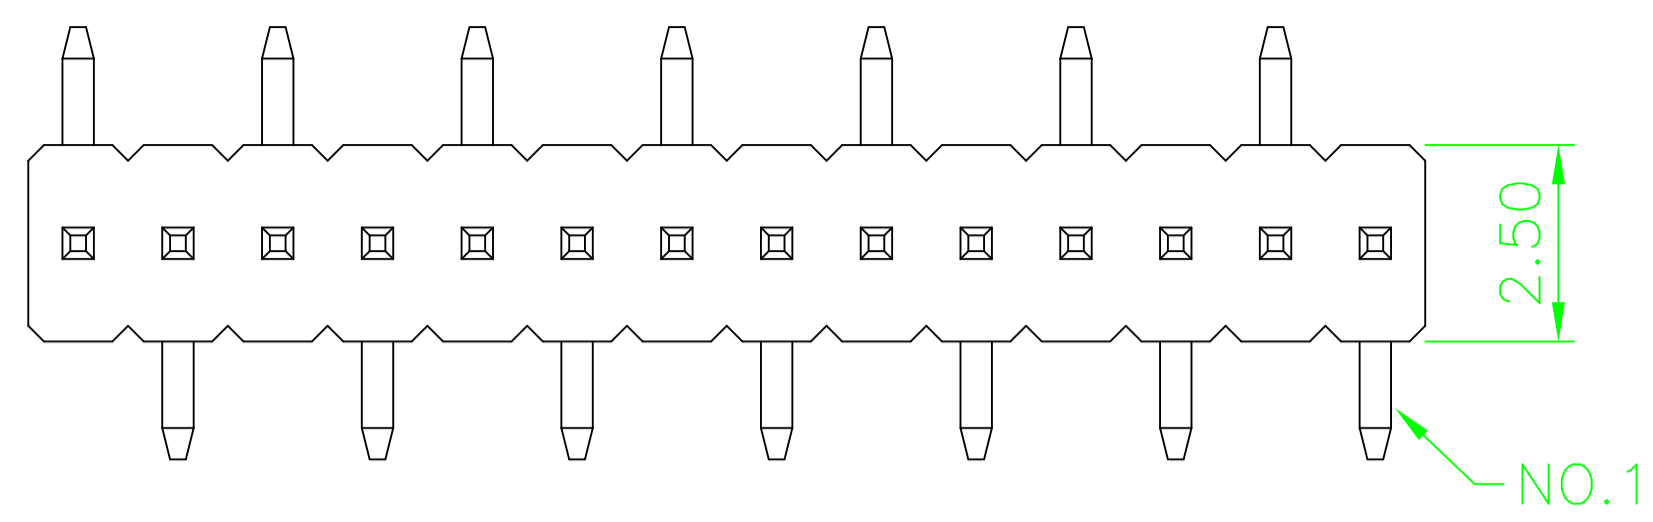


REV.	DESCRIPTION	DATE

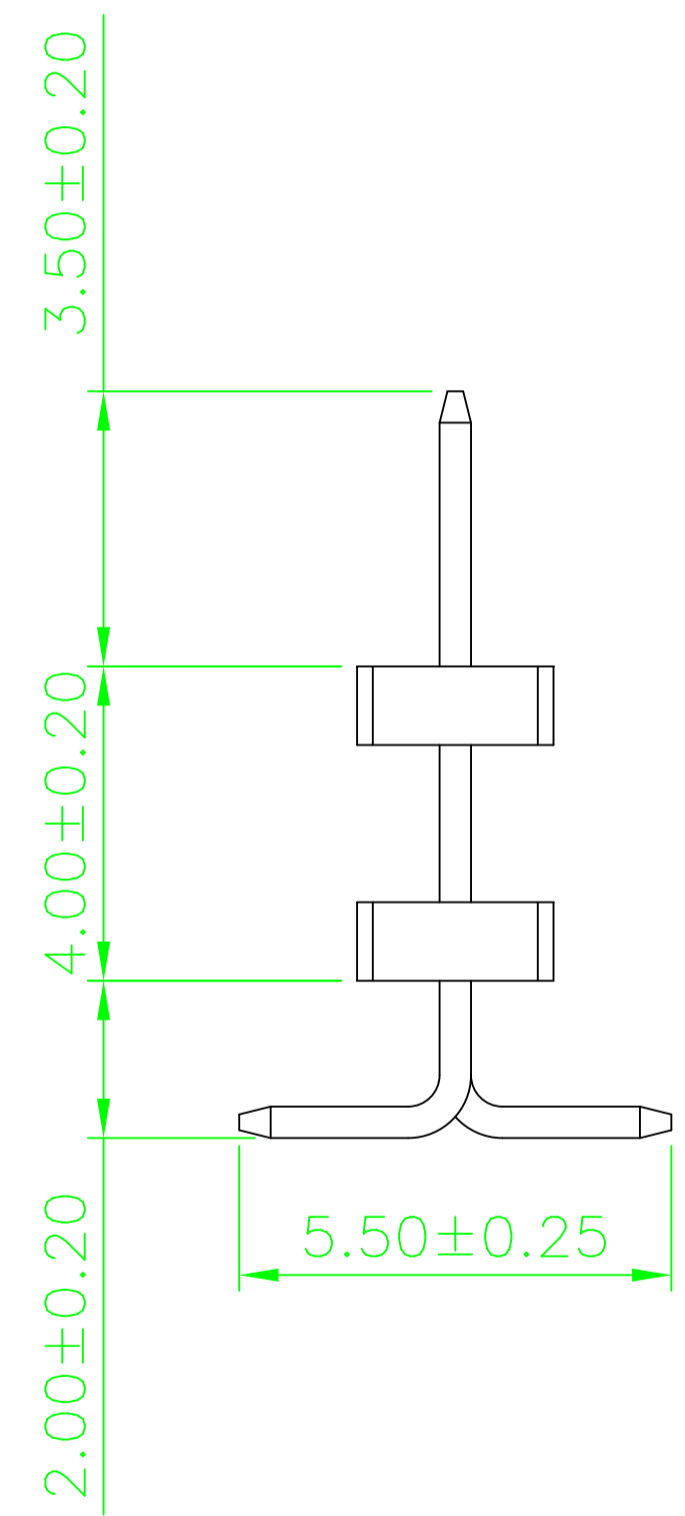


Specifications
 Current Rating: 1Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 300V AC/DC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C

Materials
 Contact Material: Brass
 Insulation Material: Polyester, UL 94V-0
 Nylon 6T
 All materials must be Geron materials

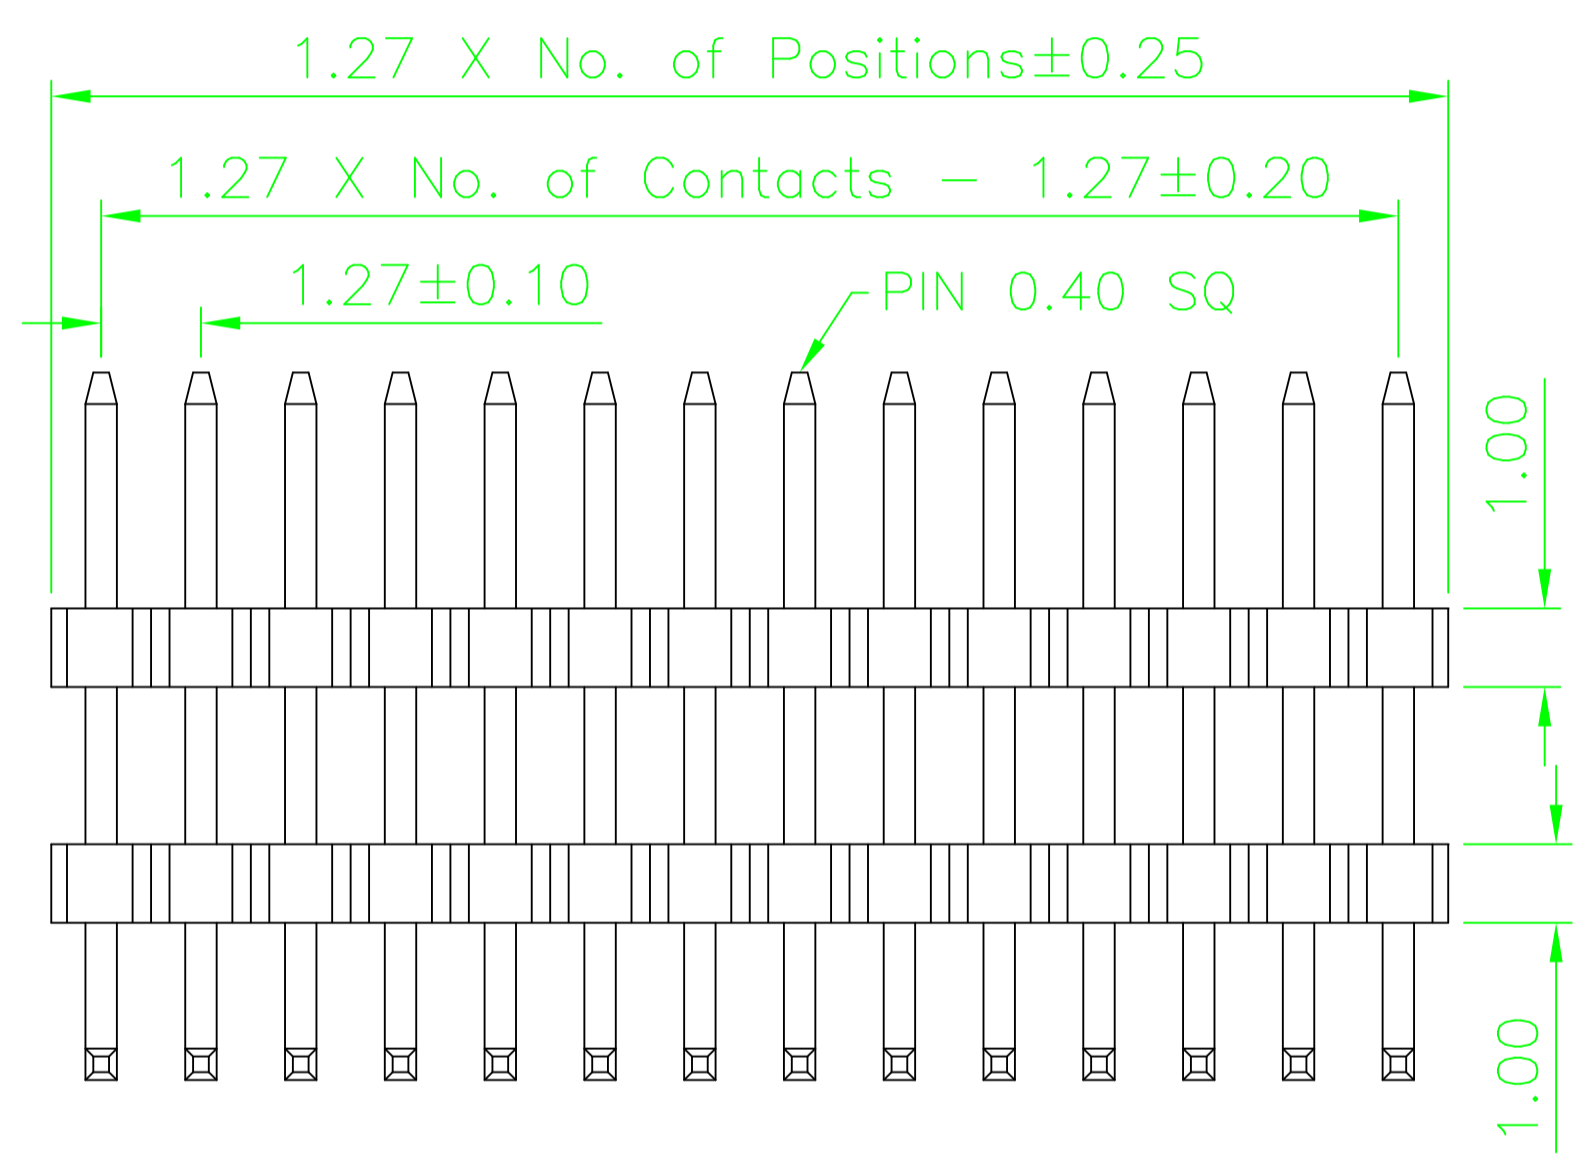

RECOMMENDED P.C.B SMT LAYOUT

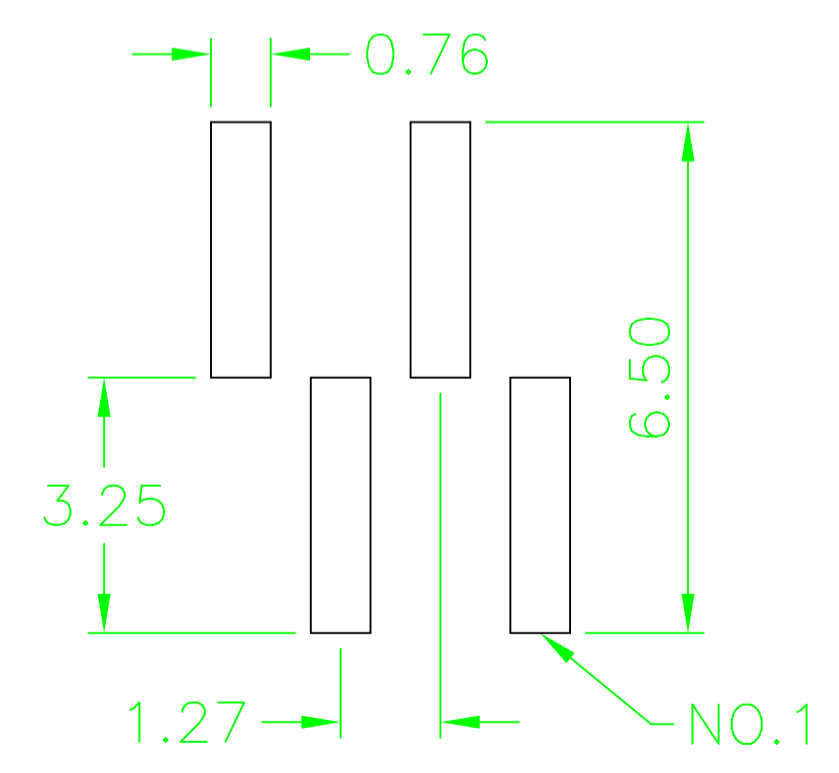

Ordering Information

GRA51 - XX XX ZS01 S2

No. of Pins per Row: 02~33
 Contact Plating:
 01=Tin
 02=Gold Flash
 Duplex plating
 05=Gold Flash /Tin
 ...

Geron Electronic Co.,Ltd

GENERAL TOLERANCE		DESIGN: ZHOU	DATE: 2010.9.21	DWG. NO. GRA51-ZS01-S2	TITLE. 1.27 PIN HEADER BOARD SPACER SINGLE ROW SMT TYPE
X° ± 5°	X. ±	CHECKED:	DATE:	PART NO. GRA51-XX-XX-ZS01-S2	
.X° ± 2°	.X ± 0.38	AUDITED:	DATE:		
.XX° ± 1°	.XX ± 0.25	APPROVED:	DATE:		
.XXX° ± 0.5°	.XXX ± 0.13				

REV. A	UNIT. mm	SCALE. 5:1	
--------	----------	------------	--