
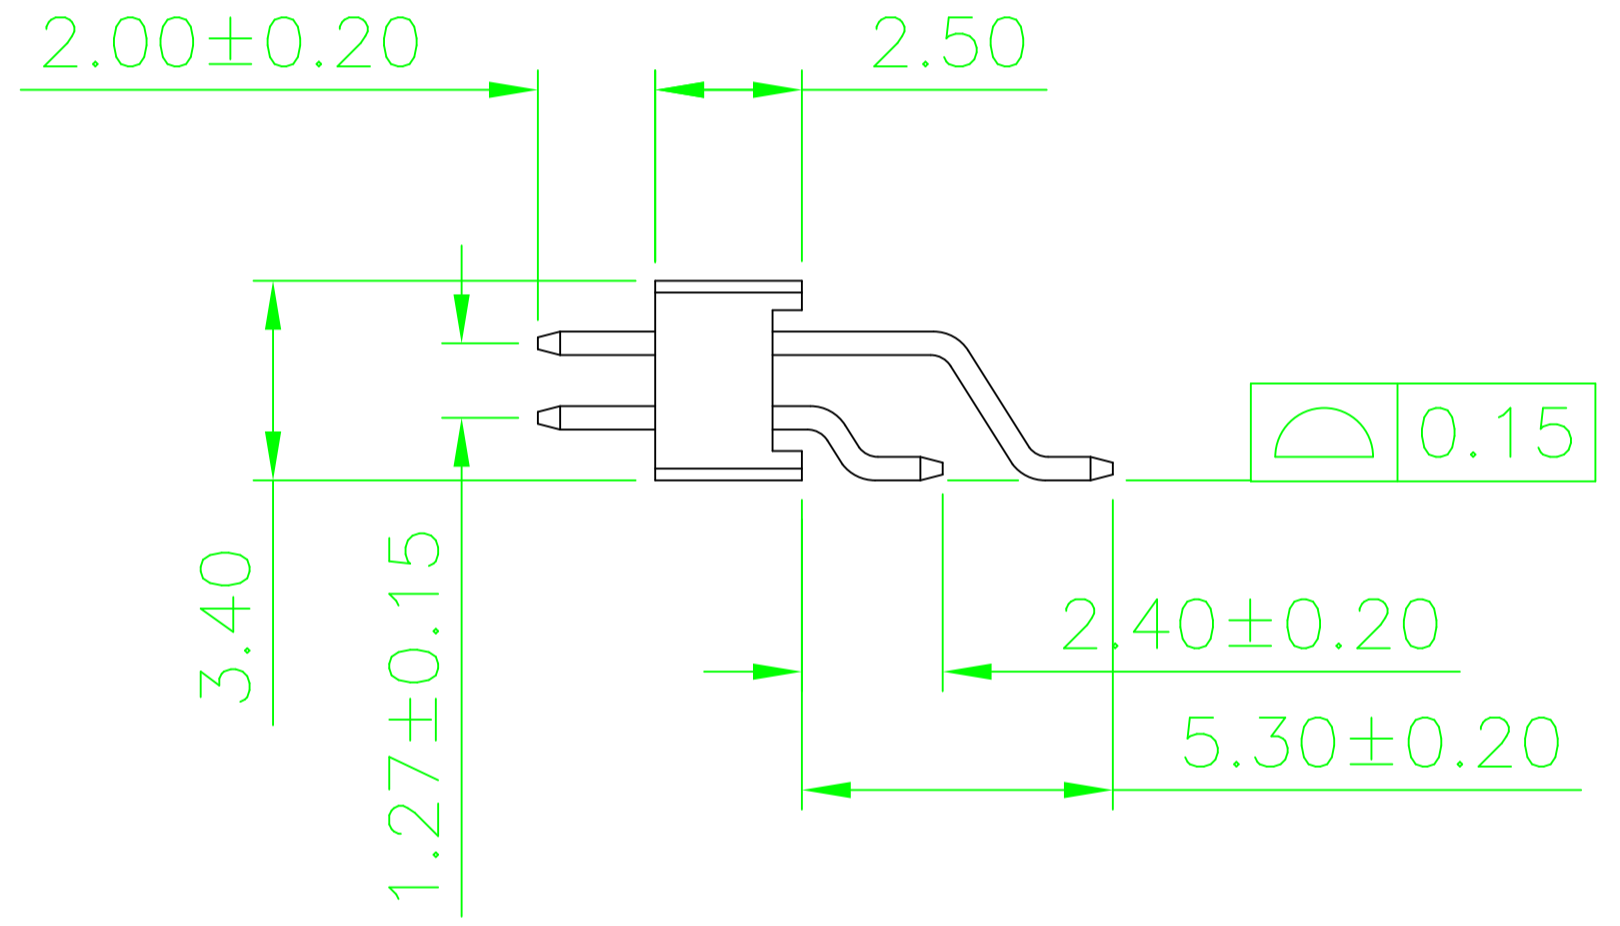


REV.	DESCRIPTION	DATE
△△	03~40PINS-->02~33PINS	ZHOU 2010.9.21

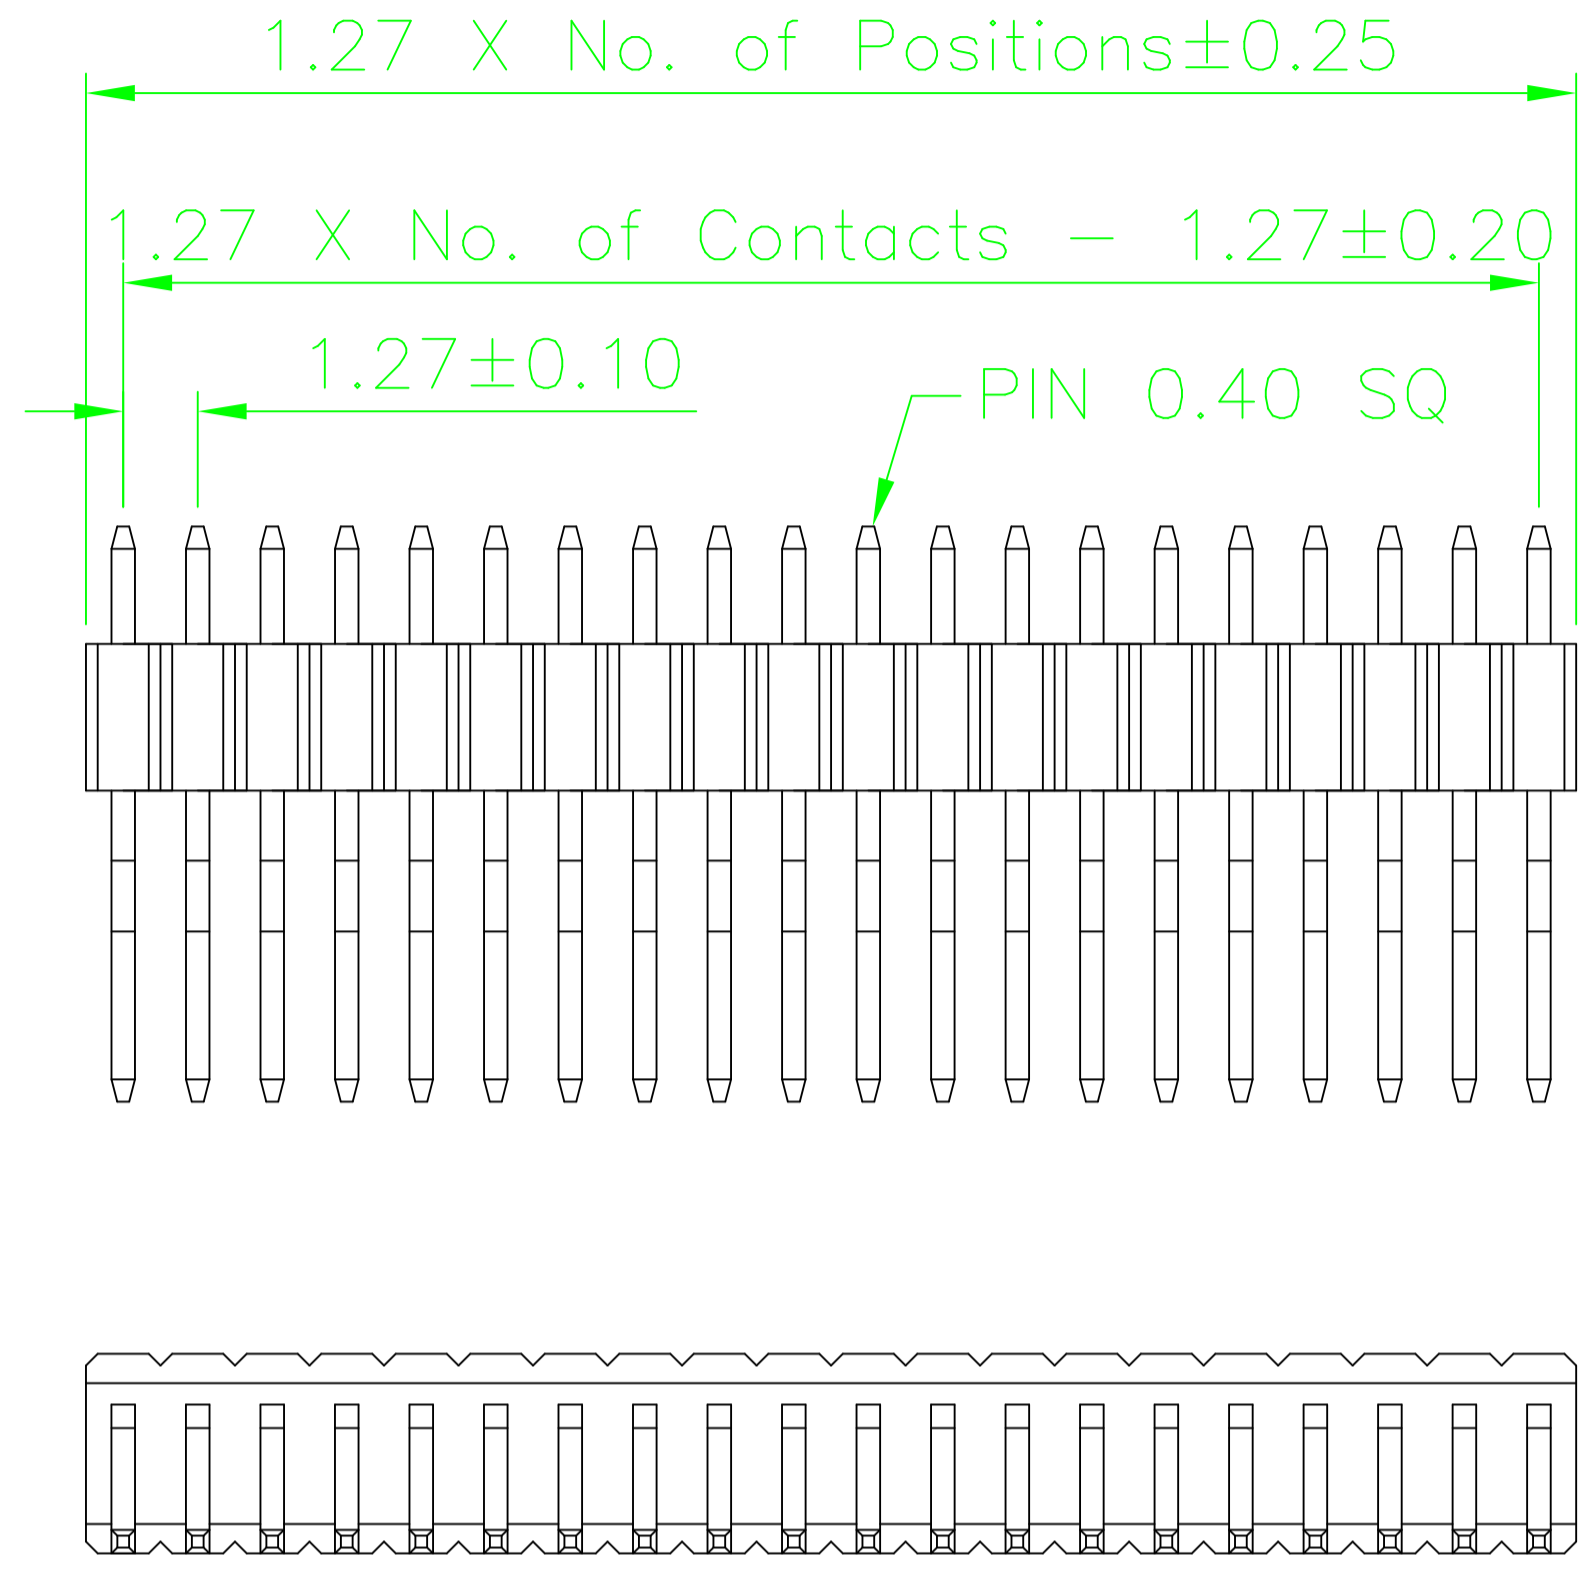

Specifications
 Current Rating: 1Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 300V AC/DC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C

Materials
 Contact Material: Copper Alloy
 Insulation Material: Polyester, UL 94V-0
 Nylon 6T
 All materials must be Geron materials


Ordering Information

GRA52 - XX XX WS01

No. of Pins per Row
02~33 △△

Contact Plating
 01=Tin
 02=Gold Flash
 Duplex plating
 05=Gold Flash /Tin
 ...

Recommended P.C.Board Layout

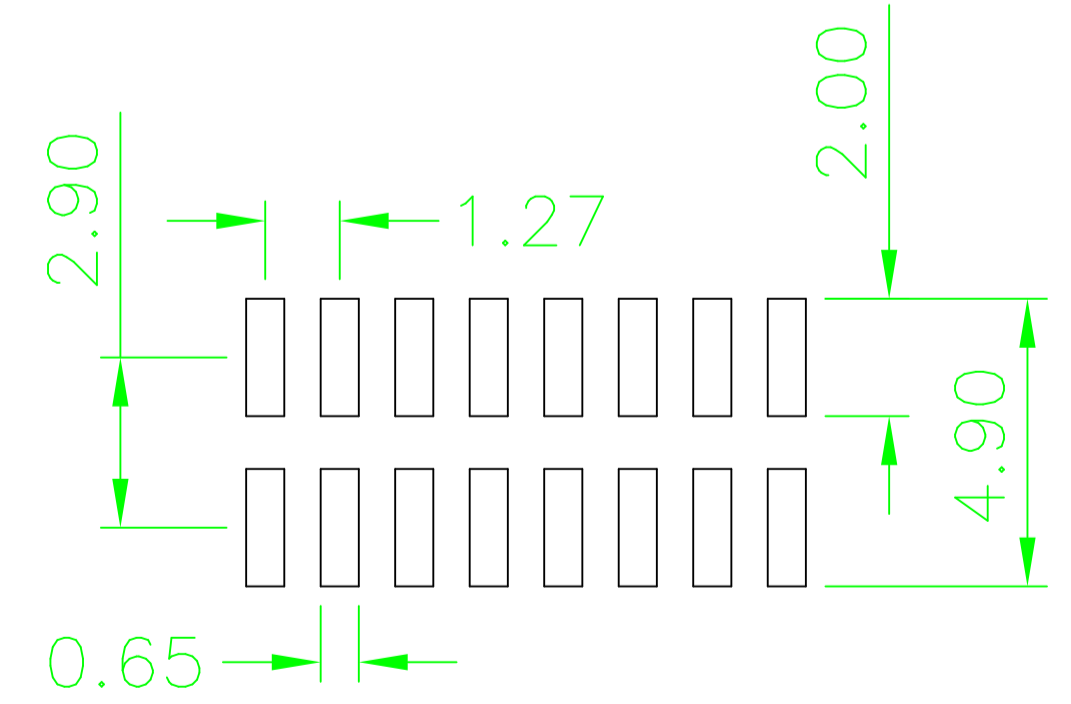

Geron Electronic Co.,Ltd

REV.	02	UNIT.	mm	SCALE.	3:1	GENERAL TOLERANCE		DESIGN:	ZHOU	DATE:	2010.9.21	DWG. NO.	GRA52-WS01	TITLE.	1.27 PIN HEADER DUAL ROWS SMT TYPE SIDE ENTRY
						X.° ± 5°	X. ±	CHECKED:		DATE:					
						.X° ± 2°	.X ± 0.38	AUDITED:		DATE:		PART NO.	GRA52-XX-XX-WS01		
						.XX° ± 1°	.XX ± 0.25	APPROVED:		DATE:					
						.XXX° ± 0.5°	.XXX ± 0.13								