

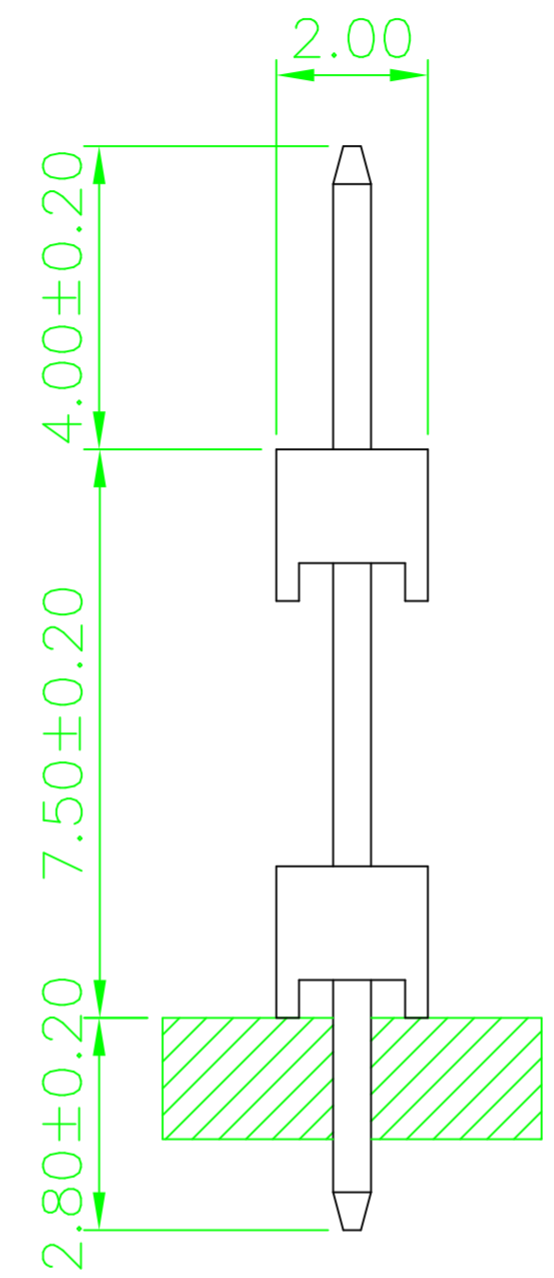
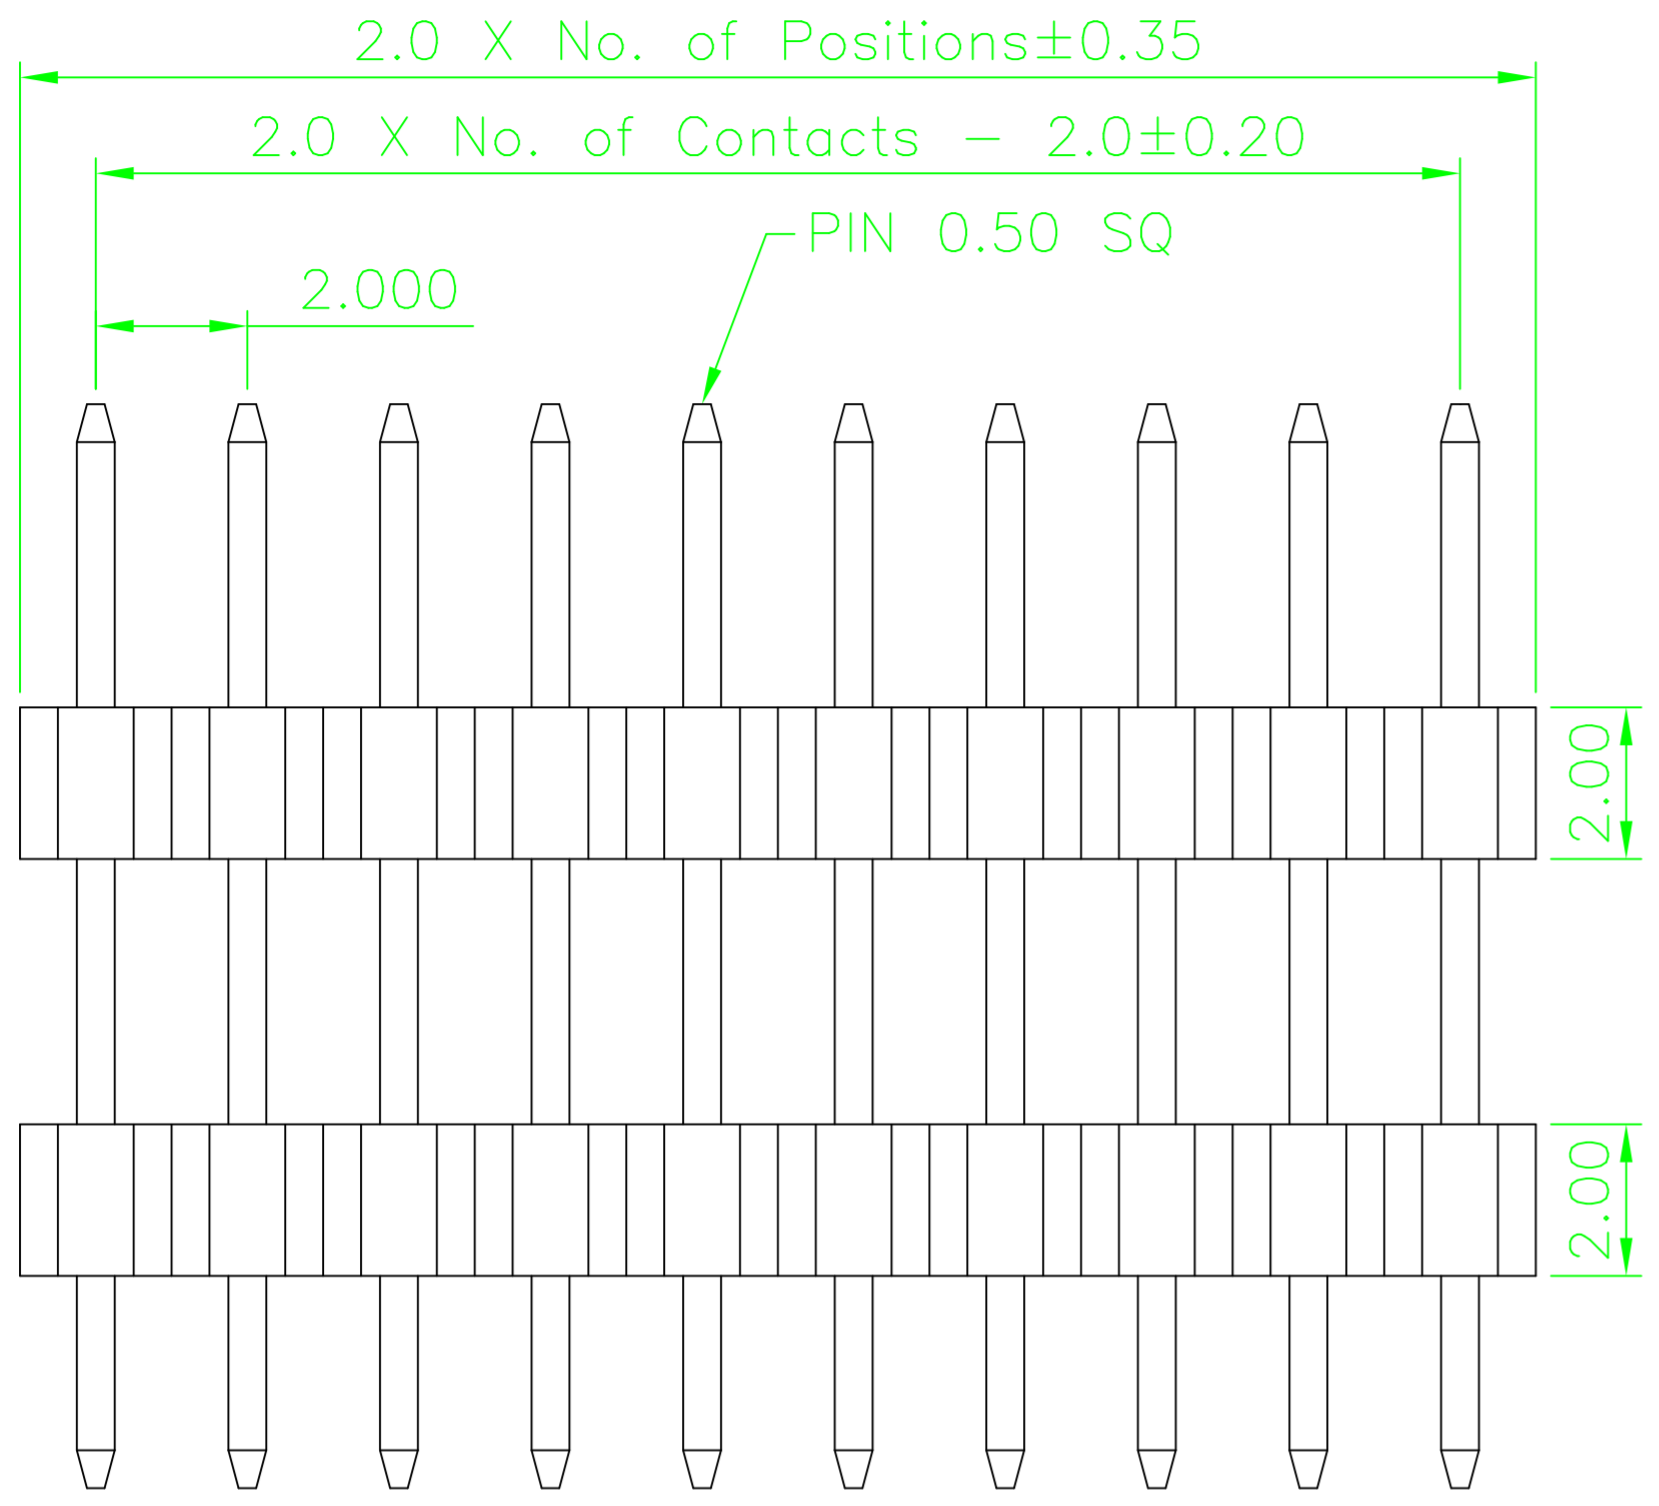


REV.	DESCRIPTION	DATE

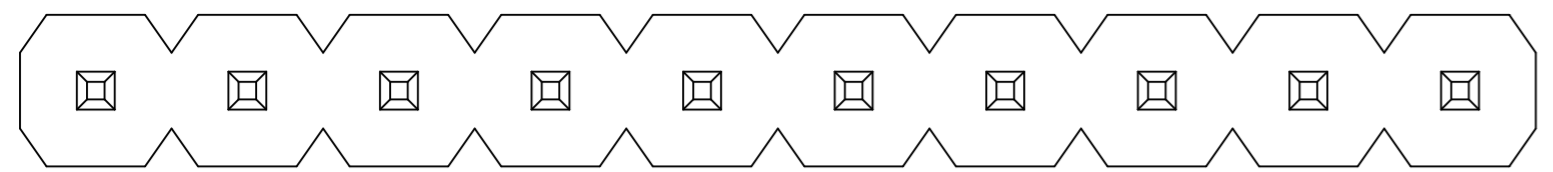

Specifications
 Current Rating: 2Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 500V AC/DC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C
Materials
 Contact Material: Copper Alloy
 Insulation Material: Polyester, UL 94V-0 PBT
 All materials must be Geron materials

Recommended P.C.Board
 Hole Layout

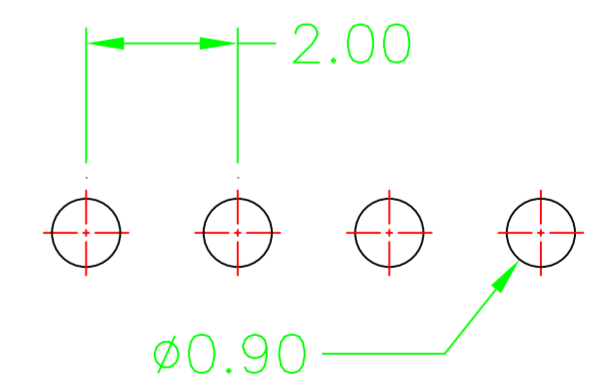

Ordering Information

GRA71 - XX XX Z07 S2

No. of Pins per Row: 02~40
 Contact Plating:
 01=Tin
 02=Gold Flash
 Duplex Plating
 05=Gold Flash/Tin
 ...

Geron Electronic Co.,Ltd

REV. 01	UNIT. mm	SCALE. 5:1	GENERAL TOLERANCE		DESIGN: ZHOU	DATE: 2010.10.18	DWG. NO. GRA71-Z07-S2	TITLE. 2.00 PIN HEADER BOARD SPACER SINGLE ROW BASE 2.00H
			X.° ± 5°	X. ±	CHECKED:	DATE:	PART NO. GRA71-XX-XX-Z07-S2	
			.X.° ± 2°	.X ± 0.38	AUDITED:	DATE:		
			.XX.° ± 1°	.XX ± 0.25	APPROVED:	DATE:		
			.XXX.° ± 0.5°	.XXX ± 0.13				