



REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2010-07-22	

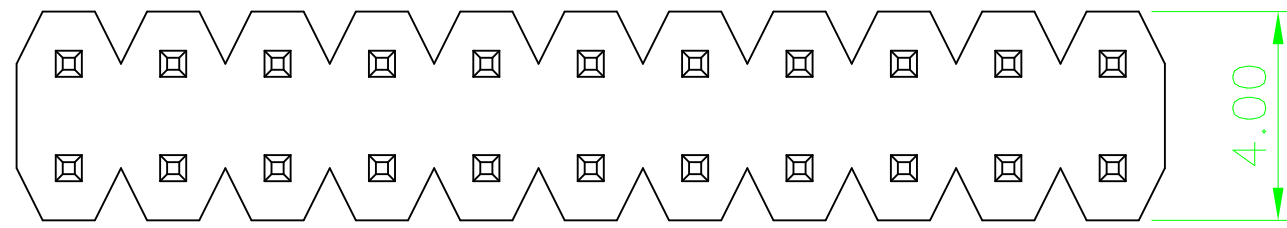

Recommended P.C.Board Layout
(Toletance:±0.05)

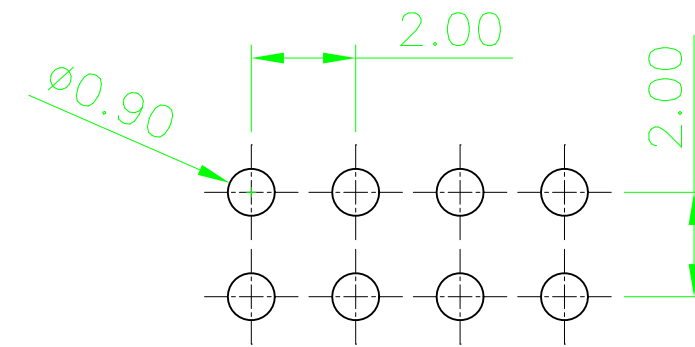



Specifications

Current Rating: 3Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 500V AC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -55°C to +125°C

Materials

Contact Material: brass
 Insulation Material: Polyester, UL 94V-0
 LCP

All materials must be Geron materials

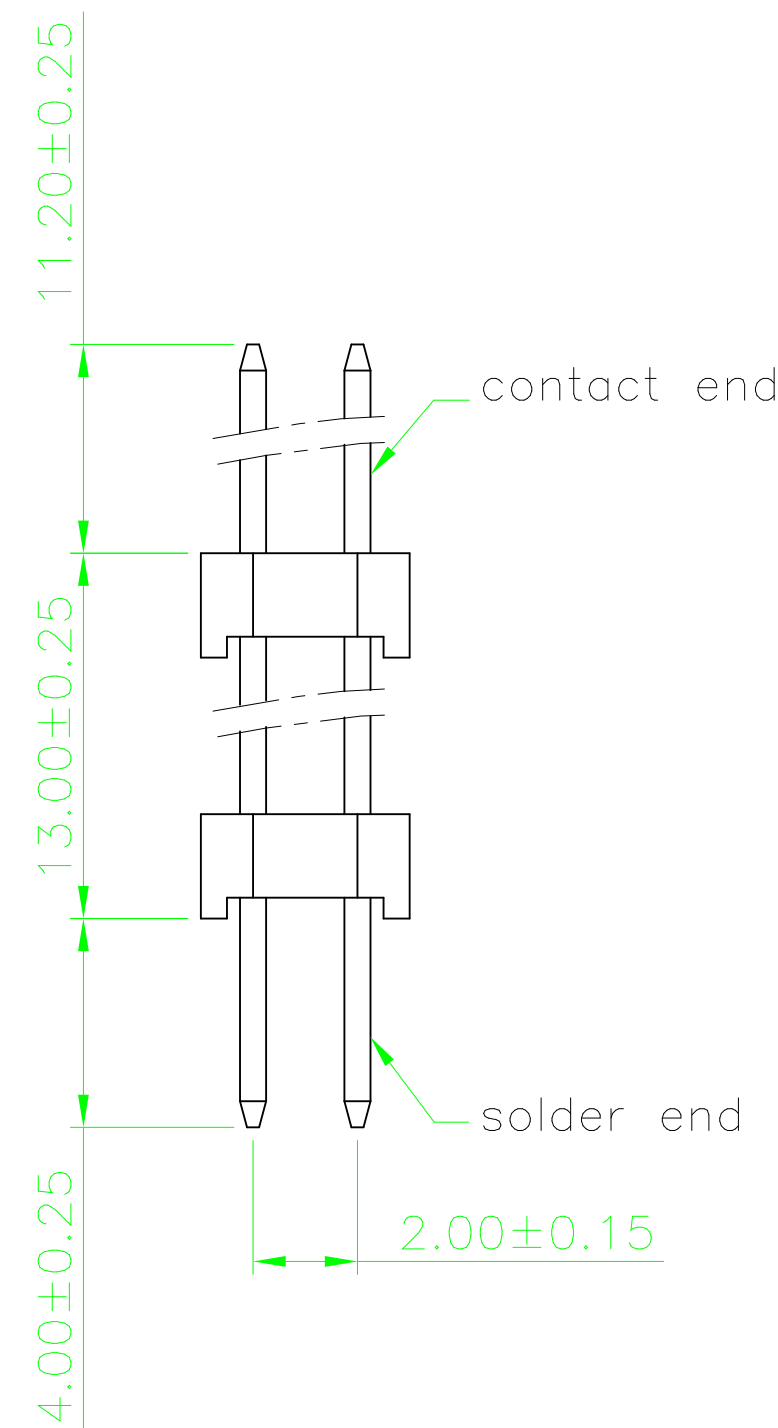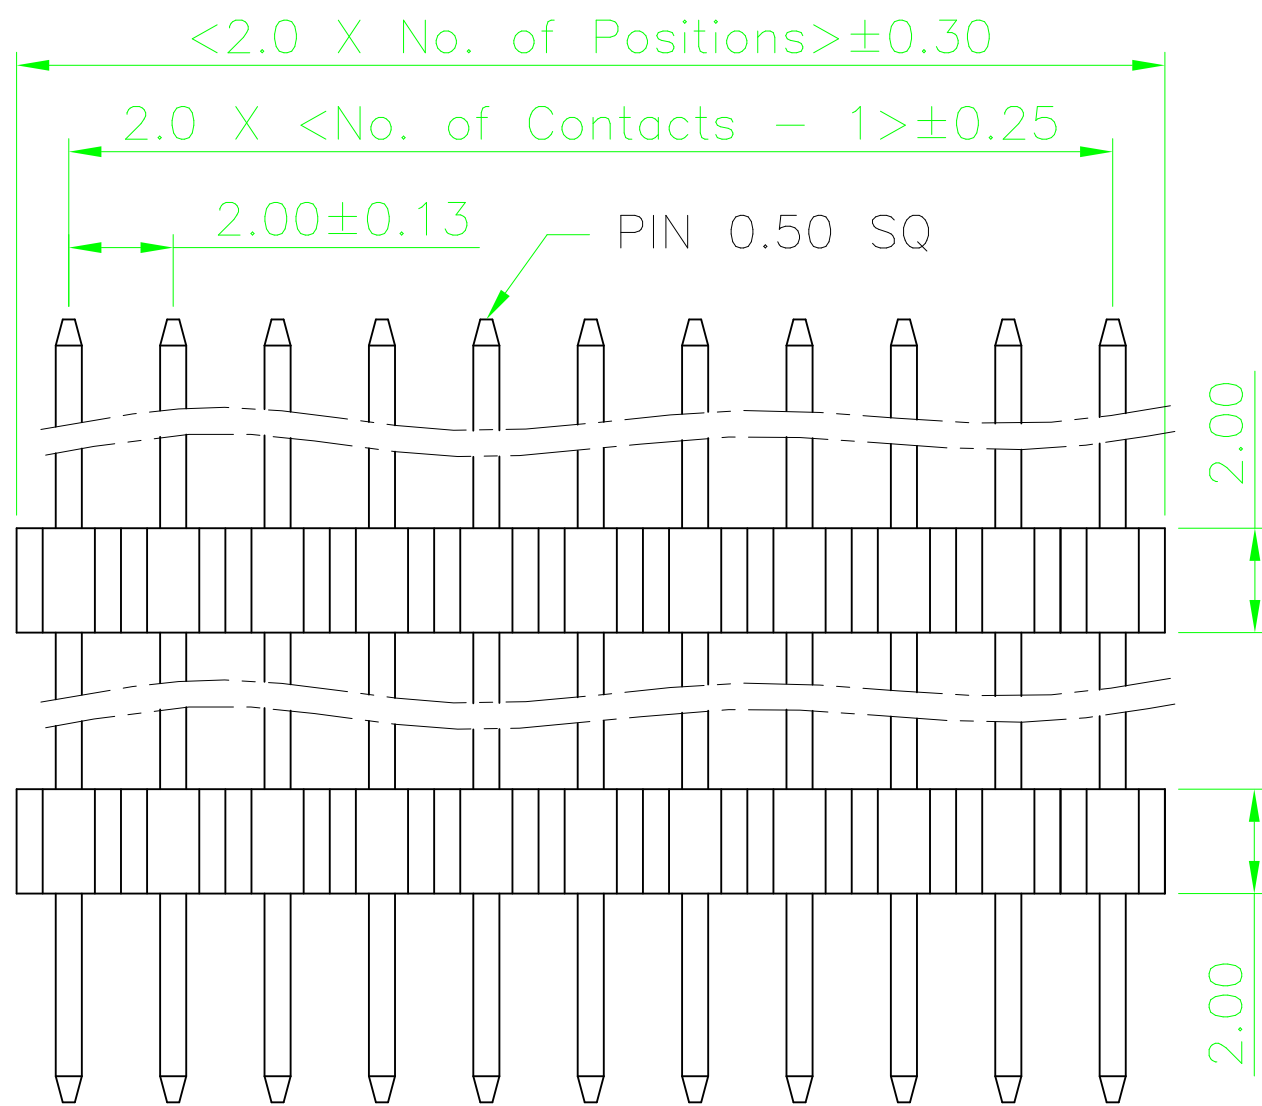

Ordering Information

GRA72 - XX XX Z005 S2

No. of Pins per Row
02-40

Contact Plating
01=Tin
02=Gold Flash
Duplex Plating
05=Gold Flash/Tin
.....

GERON ELECTRONIC CO., LTD

GENERAL TOLERANCE

X.° ± 5°	X. ± 0.30
.X° ± 3°	.X ± 0.25
.XX° ± 2°	.XX ± 0.15
.XXX° ± 1°	.XXX ± 0.10

DESIGN:	DATE:2010-07-22
CHECKED:	DATE:
AUDITED:	DATE:
APPROVED:	DATE:

DWG. NO.	GRA72-Z005-S2
PART NO.	GRA72-XX-XX-Z005-S2

TITLE.	2.00PIN HEADER DUAL ROWS DIP TYPE CONNECTOR
--------	---