
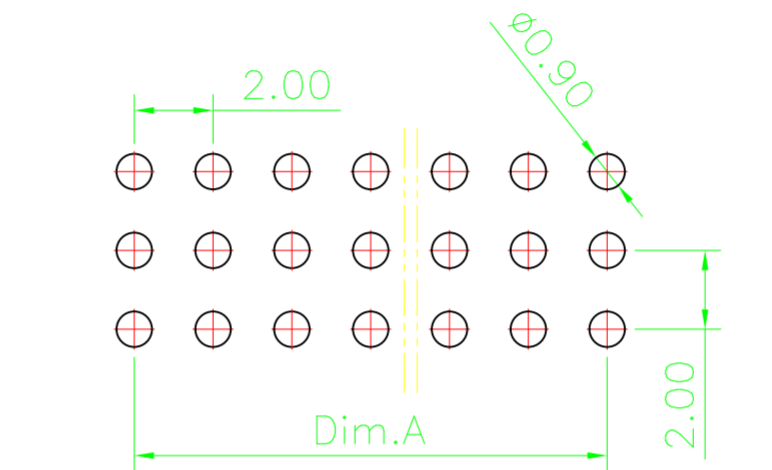
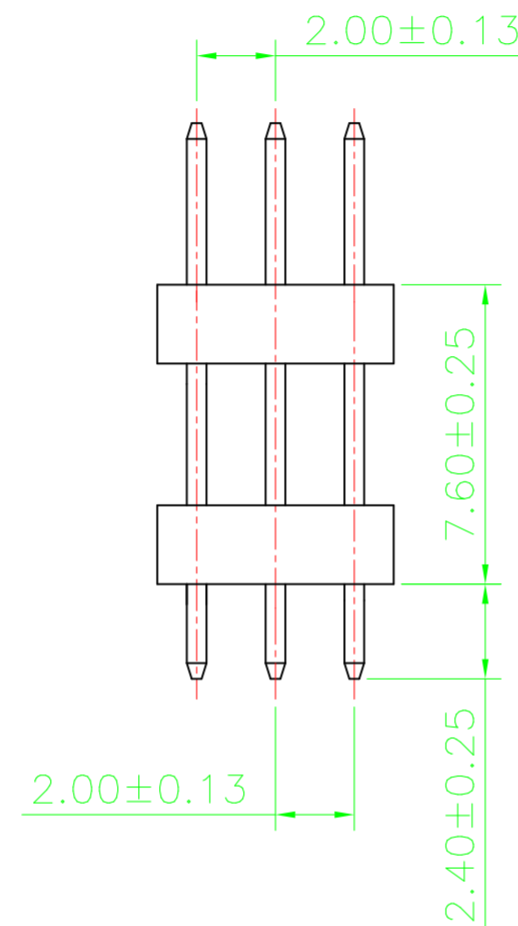
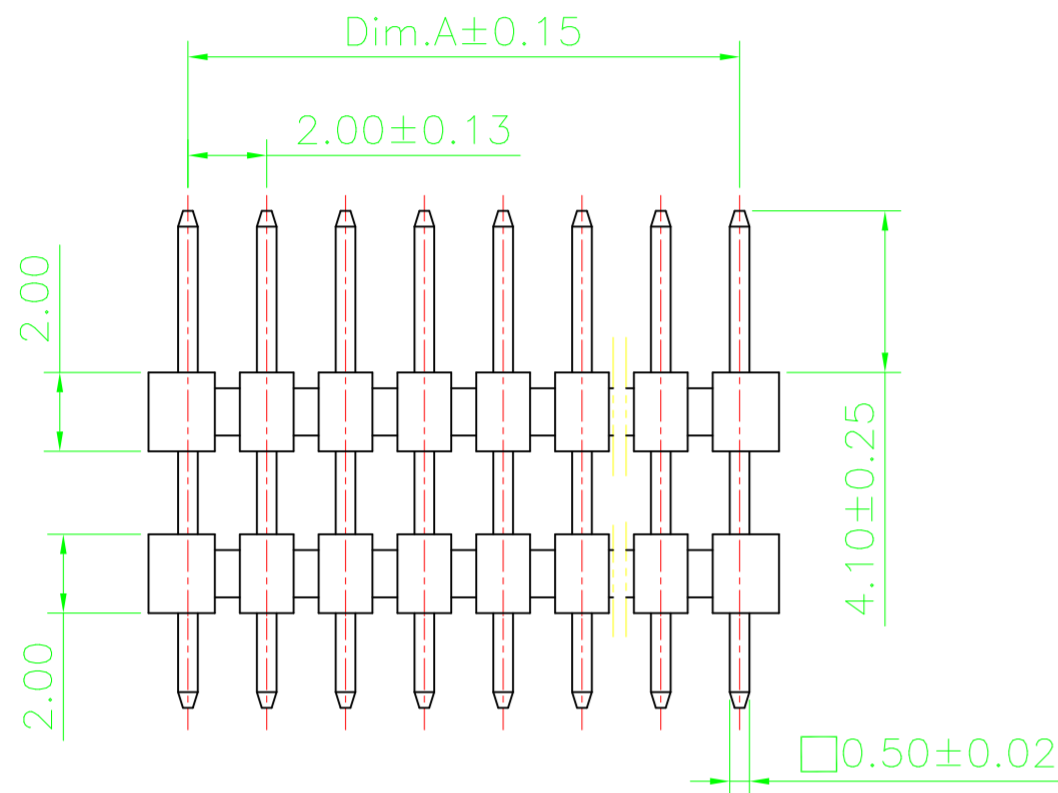


REV.	LOCAS.	DESCRIPTION.	DATE.	DRAWN.
A		INITIAL RELEASE.	2010.10.18	ZHOU

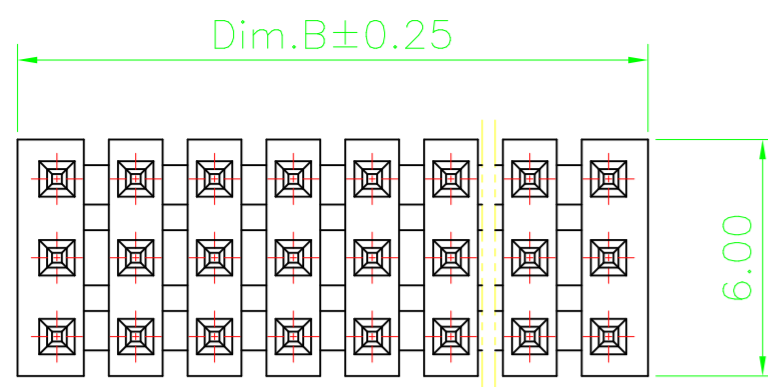

Recommended P.C.B. Layout  
Tolerance:0.05mm

No. of PIN/ROW	Dimension Information	
	A	B
02	2.00	4.00
03	4.00	6.00
04	6.00	8.00
05	8.00	10.00
06	10.00	12.00
07	12.00	14.00
08	14.00	16.00
09	16.00	18.00
10	18.00	20.00
11	20.00	22.00
12	22.00	24.00
13	24.00	26.00
14	26.00	28.00
15	28.00	30.00
16	30.00	32.00
17	32.00	34.00
18	34.00	36.00
19	36.00	38.00
20	38.00	40.00
21	40.00	42.00
22	42.00	44.00
23	44.00	46.00
24	46.00	48.00
25	48.00	50.00
26	50.00	52.00
27	52.00	54.00
28	54.00	56.00
29	56.00	58.00
30	58.00	60.00
31	60.00	62.00
32	62.00	64.00
33	64.00	66.00
34	66.00	68.00
35	68.00	70.00
36	70.00	72.00
37	72.00	74.00
38	74.00	76.00
39	76.00	78.00
40	78.00	80.00

## Ordering Information

GRA73 - XX      XX    Z01    S2

No. of Pins per Row  
02~40

Contact Plating  
01=Tin(100u")  
02=Gold Flash

Duplex Plating  
22=Matte Tin(100u")  
.....

- Specifications  
Current Rating: 2Amp.  
Insulation Resistance: 1000MΩ Min.  
Dielectric Withstanding: 500VAC.  
Contact Resistance: 20mΩ Max.  
Operating Temperature: -55°C to +105°C.
- Materials  
Contact Material: Phosphor Bronze.  
Insulator Material: LCP, UL94V-0, Color: Black.
- All materials must be Geron materials.

# Geron Electronic Co.,Ltd

GENERAL TOLERANCE

X.° ± 5.0°    X.    ± 0.35

.X° ± 2.0°    .X    ± 0.25

.XX° ± 1.0°    .XX    ± 0.15

.XXX° ± 0.5°    .XXX    ± 0.10

DESIGN: ZHOU

DATE: 2010.10.18

CHECKED:

DATE:

AUDITED:

DATE:

DWG. NO.

GRA73-Z01-S2

PART NO.

GRA73-XX-XX-Z01-S2

TITLE.

2.00 MALE  
HEADER THREE  
ROWS DIP TYPE

