


Specifications
 Current Rating: 2Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 500V AC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C

Materials
 Contact Material: Copper Alloy
 Insulation Material: Polyester, UL 94V-0
 P.B.T
 All materials must be Geron materials

Recommended P.C.Board
 Hole Layout

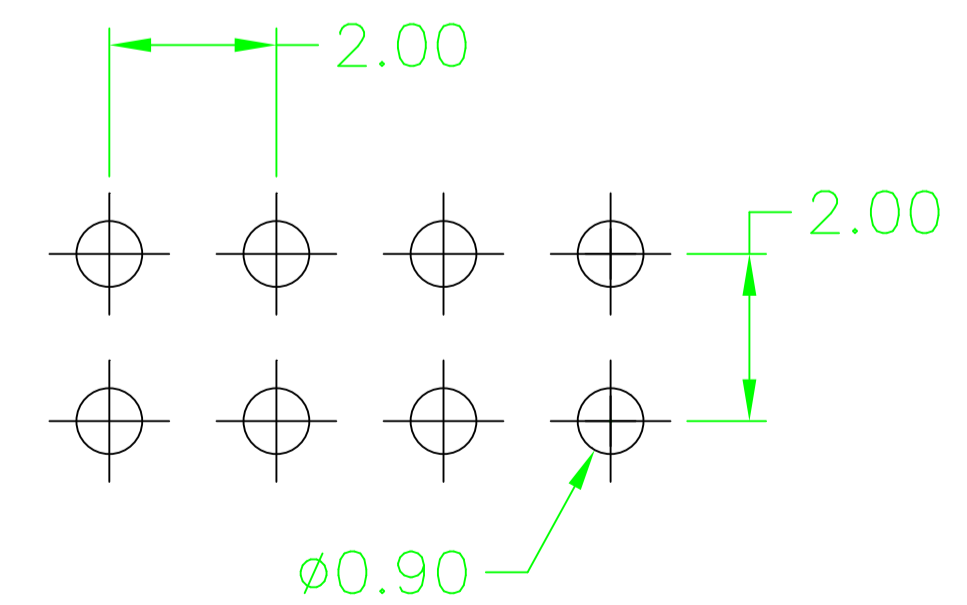

Ordering Information

GRA72 - XX XX W003

No. of Pins per Row: 02~40
 Contact Plating: 01=Tin, 02=Gold Flash Standard, Duplex Plating, 05=Gold Flash/Tin

GERON ELECTRONIC CO.,LTD				GENERAL TOLERANCE		DRAWN	DRAWN	DATE	DATE	DWG. NO.	TITLE
REV.	REV.	UNIT	UNIT	SCALE	SCALE	CHECK	APPROVE	DATE	DATE	DWG.NO.	TITLE1
										PART NO.	TITLE2
										PART.NO.	TITLE3