
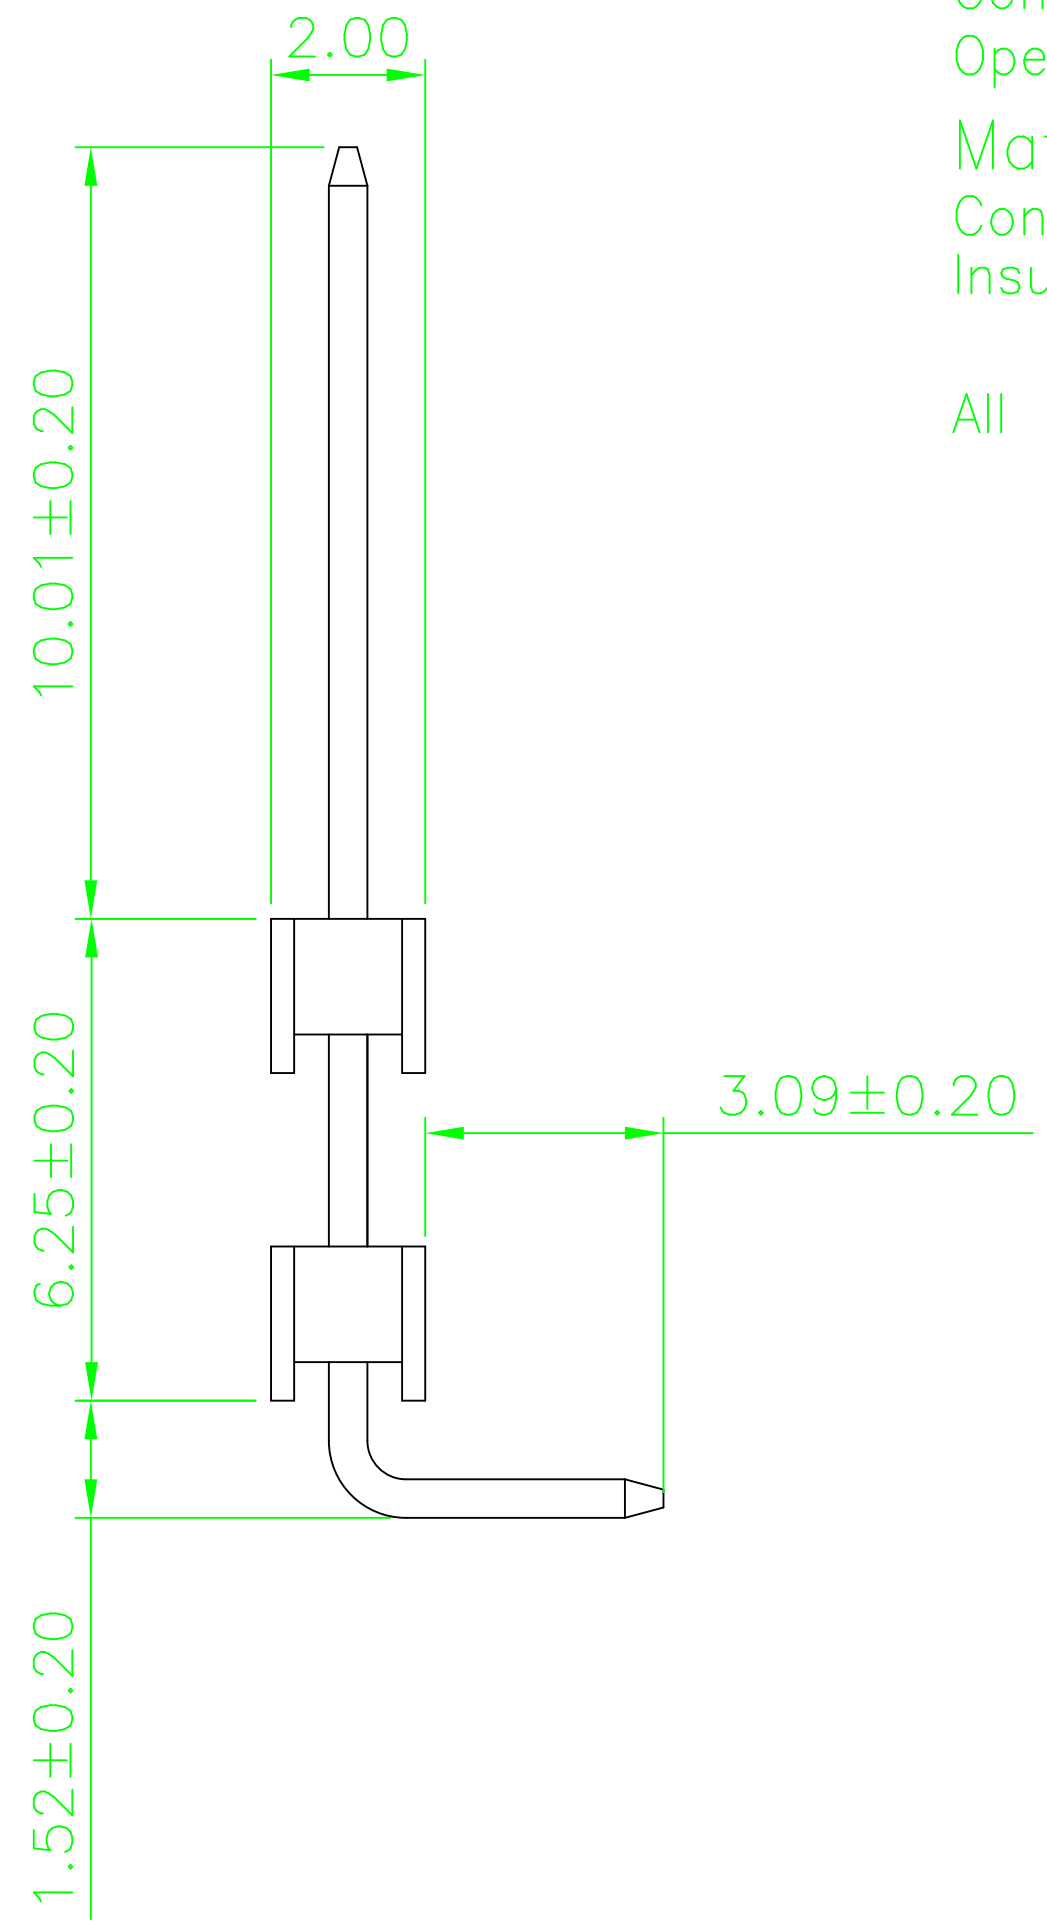
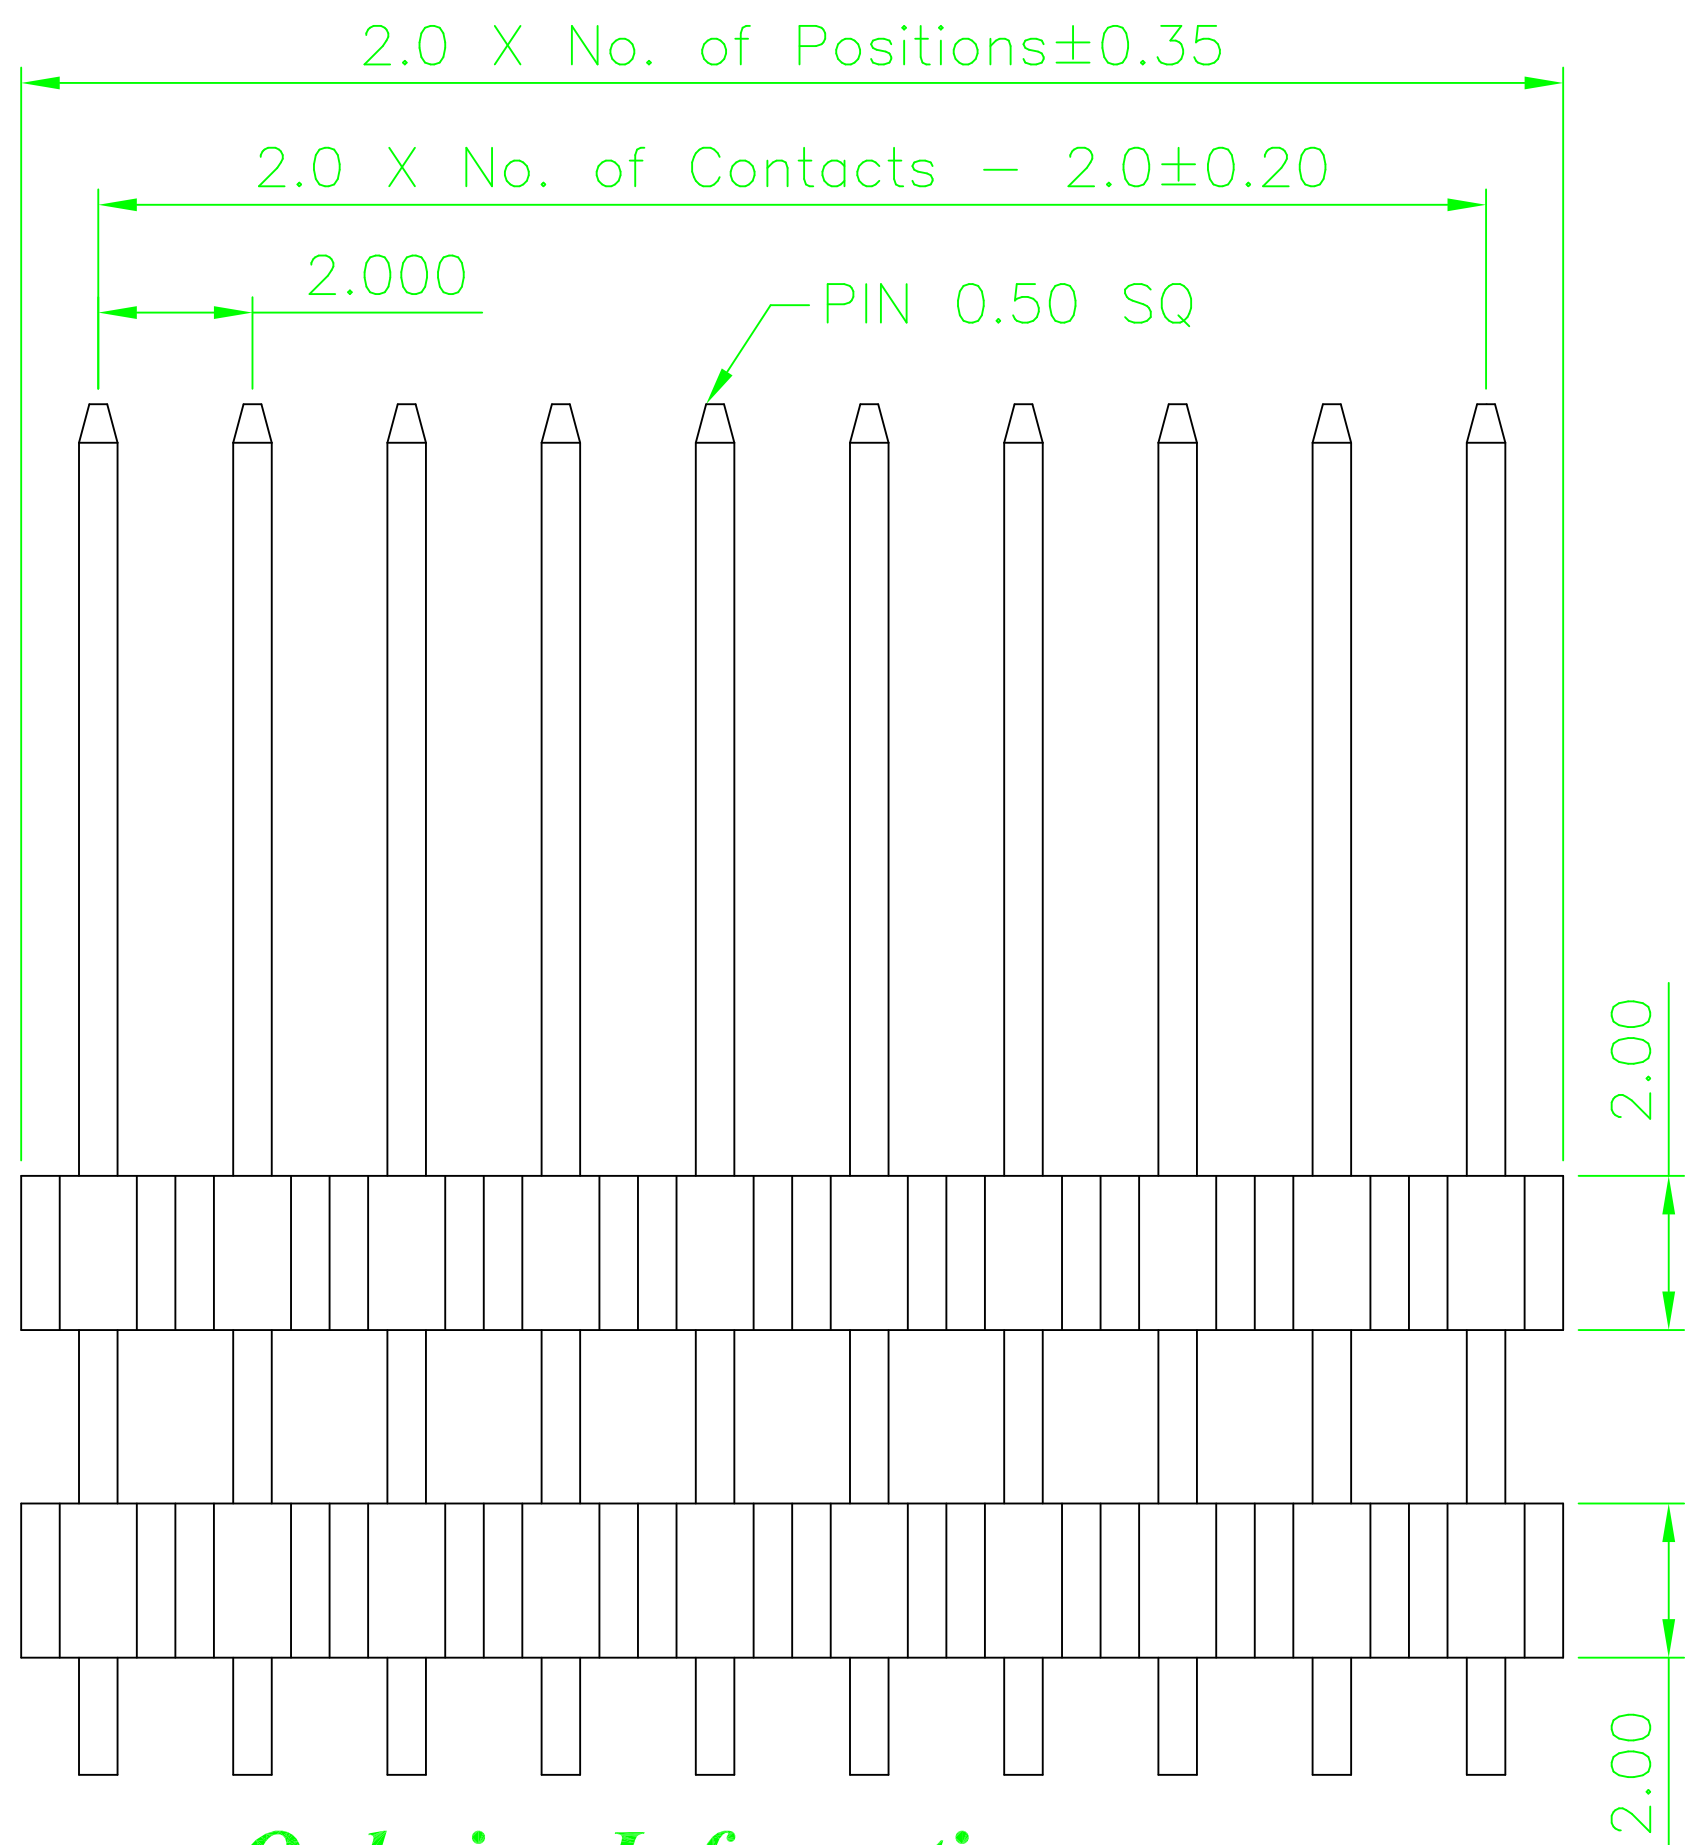


REV.	DESCRIPTION	DATE

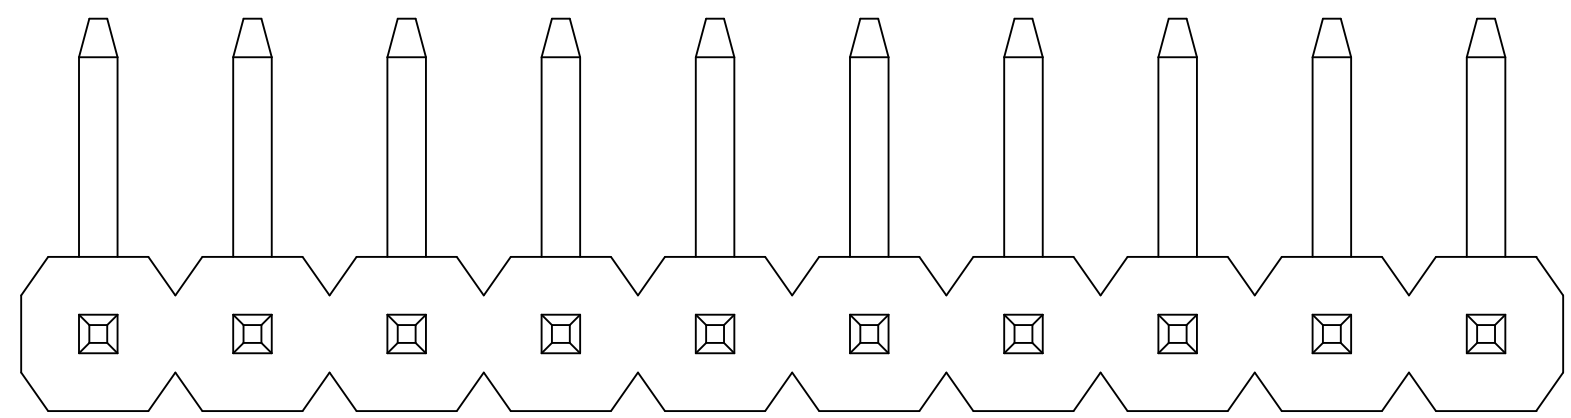


Specifications
 Current Rating: 2Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 500VAC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -55°C to +105°C

Materials
 Contact Material: Copper alloy
 Insulation Material: Polyester, UL94V-0 PBT

All materials must be Geron materials

Recommended P.C.Board
 Hole Layout

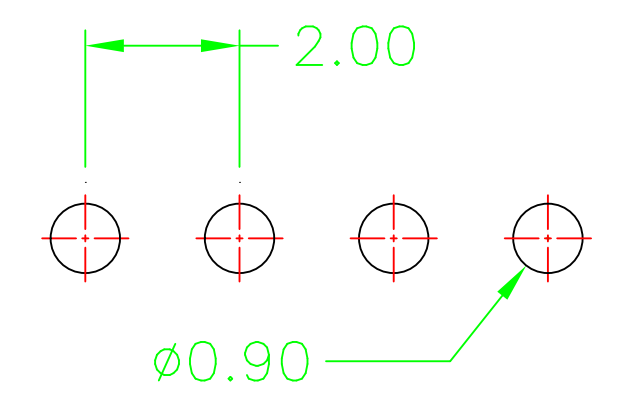

Ordering Information

GRA71 - XX XX W01 S2

No. of Pins per Row 02-40
 Contact Plating
 01=Tin
 02=Gold Flash
 Duplex plating
 05=Gold flash/Tin

Geron Electronic Co.,Ltd

GENERAL TOLERANCE		DESIGN:	DATE:	DWG. NO.	TITLE.
X.° ± 5°	X. ±	ZHOU	2010.10.18	GRA71-W01-S2	2.00 PIN HEADER BOARD SPACER SINGLE
.X.° ± 2°	.X ± 0.38	CHECKED:	DATE:	PART NO.	ROW BASE 2.00H
.XX.° ± 1°	.XX ± 0.25	AUDITED:	DATE:	GRA71-XX-XX-W01-S2	
.XXX.° ± 0.5°	.XXX ± 0.13	APPROVED:	DATE:		

REV.	01	UNIT.	mm	SCALE.	5:1	
------	----	-------	----	--------	-----	--