
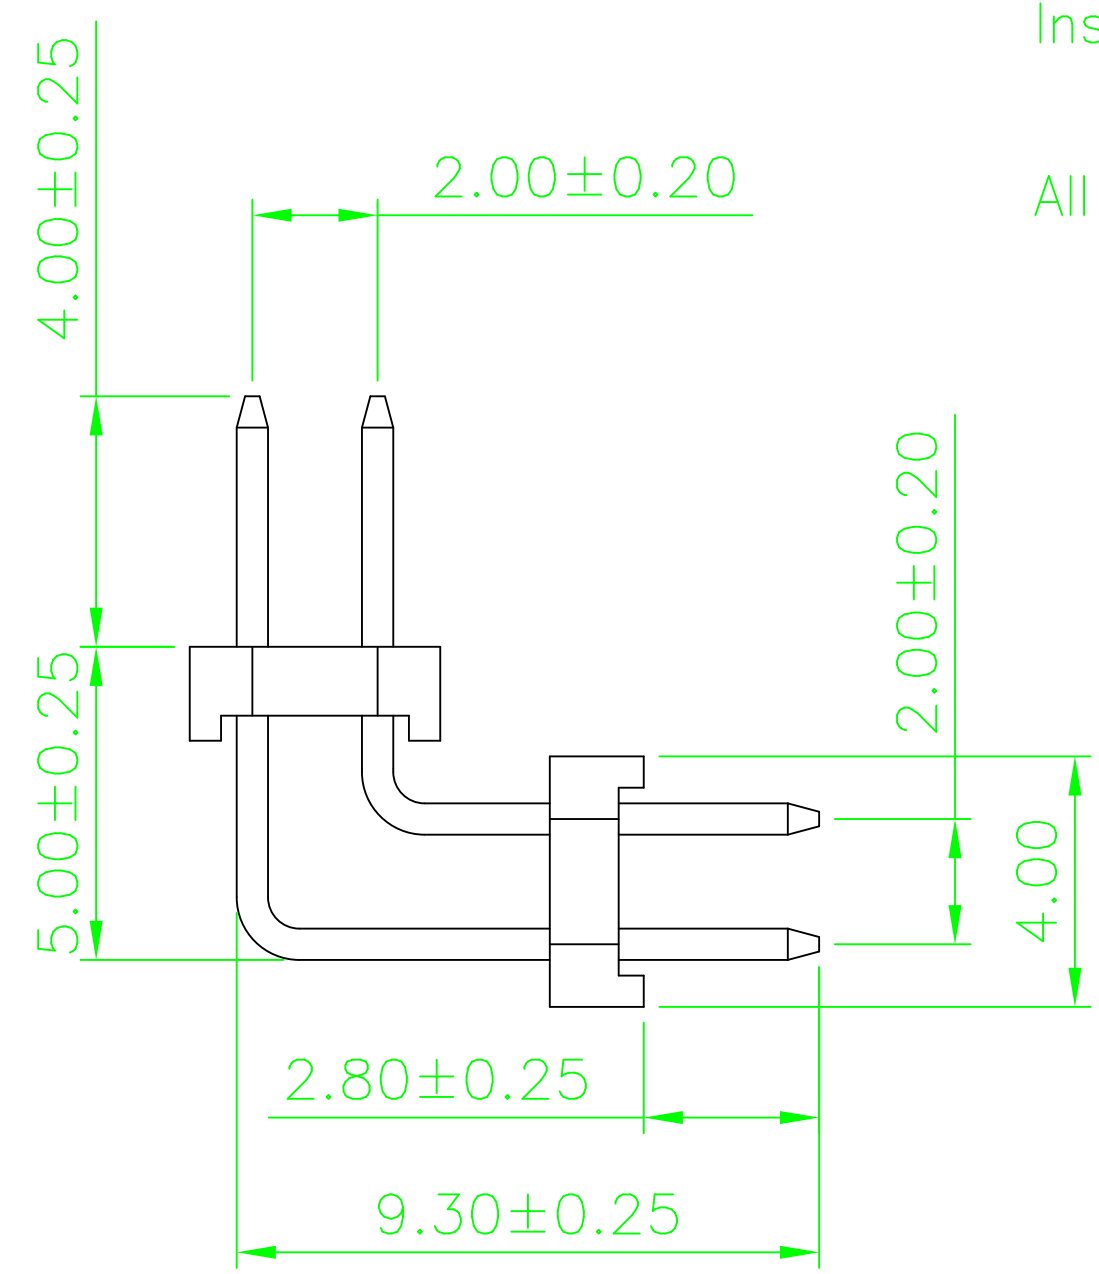
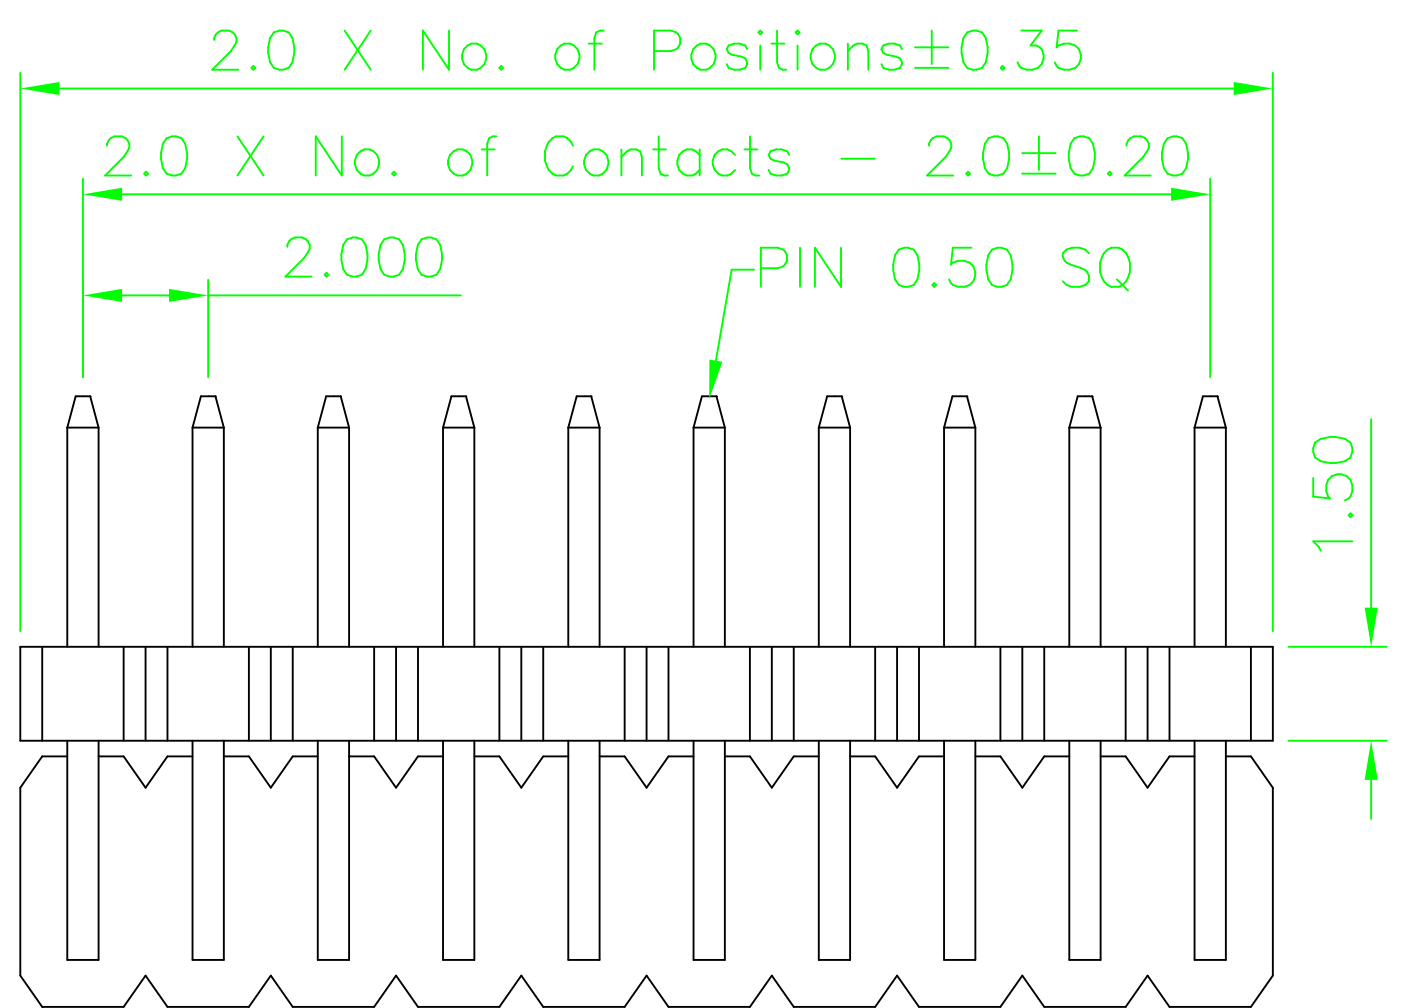



REV.	DESCRIPTION	DATE

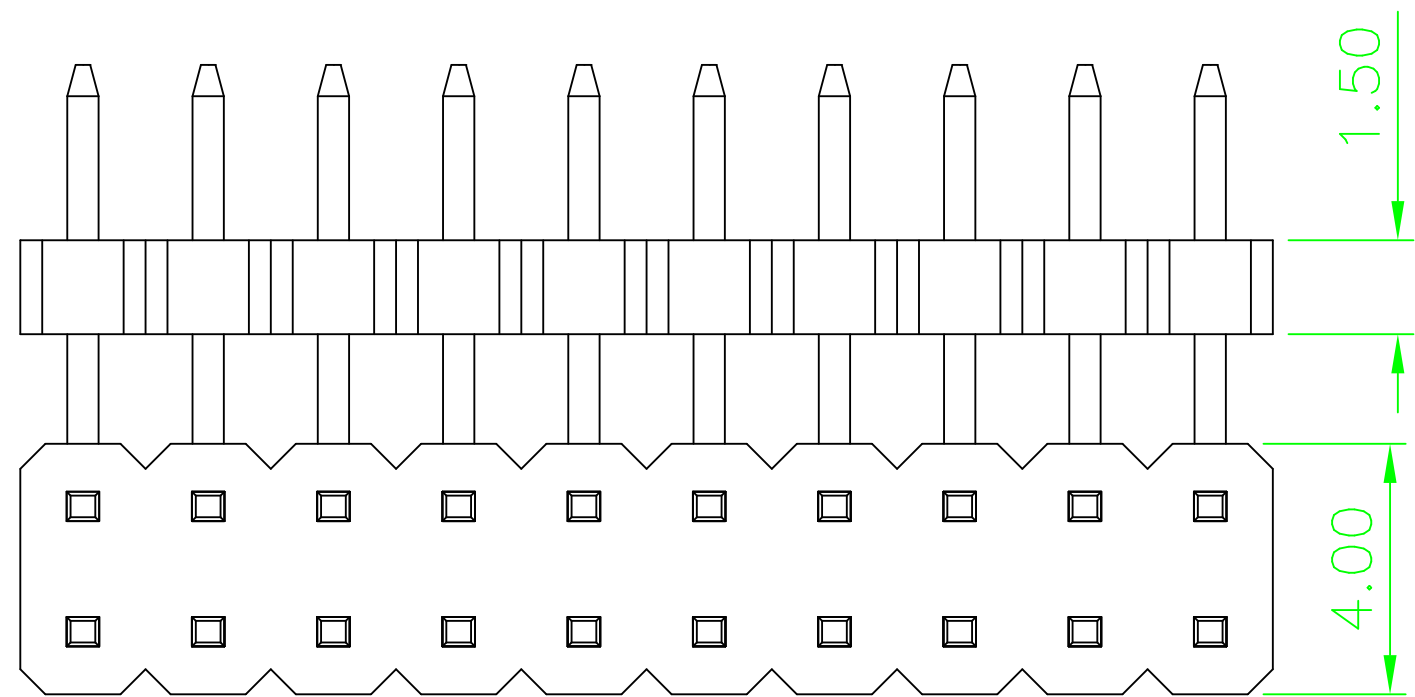

Specifications
 Current Rating: 1Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 500V AC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C

Materials
 Contact Material: Copper Alloy
 Insulation Material: Polyester,
 P.B.T(UL 94V-0)
 All materials must be Geron materials

Recommended P.C.Board
Hole Layout

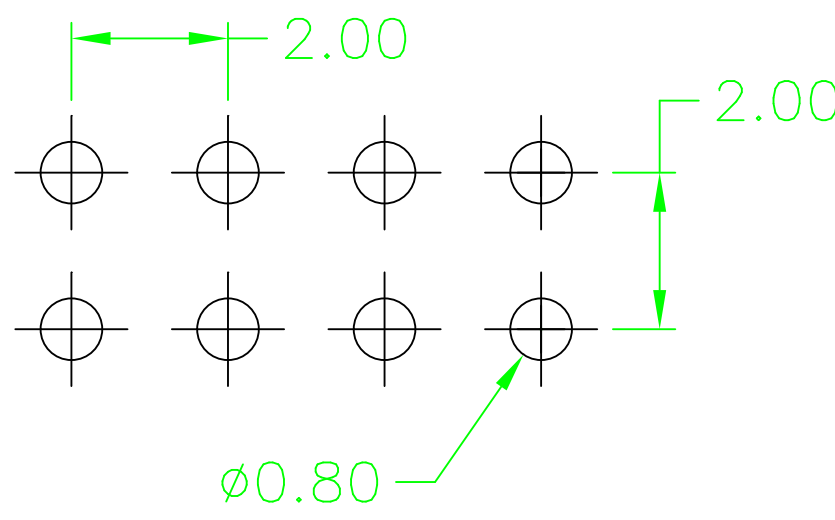

Ordering Information

GRA72 - XX XX W05 S2

No. of Pins per Row
02~40

Contact Plating
 01=Tin
 02=Gold Flash Standard
 Duplex Plating
 05=Gold Flash/Tin

Geron Electronic Co.,Ltd

GENERAL TOLERANCE		DESIGN:	DATE:	DWG. NO.	TITLE:
X.° ± 5°	X. ±	ZHOU	2010.10.18	GRA72-W05-S2	2.00 PIN HEADER DUAL ROWS
.X.° ± 2°	.X ± 0.38	CHECKED:	DATE:	PART NO.	
.XX.° ± 1°	.XX ± 0.25	AUDITED:	DATE:	GRA75-XX-XX-W05-S2	
.XXX.° ± 0.5°	.XXX ± 0.13	APPROVED:	DATE:		

REV.	UNIT.	SCALE.	Symbol
01	mm	4:1	