



REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
02	02	修正可做pin數：02~40	2010.10.18	ZHOU

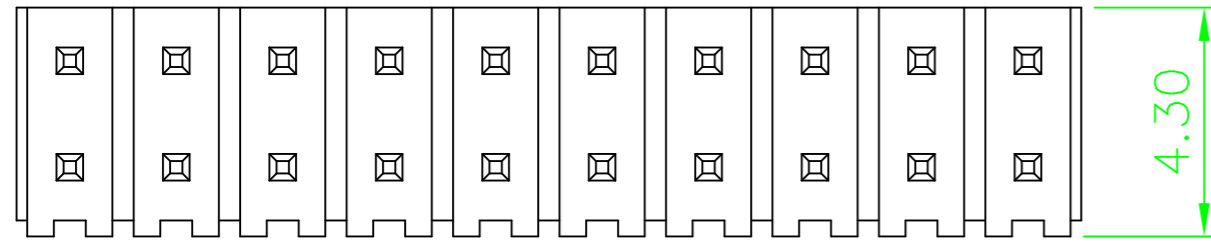

Recommended P.C.B.Layout
(Tolerance:±0.05)


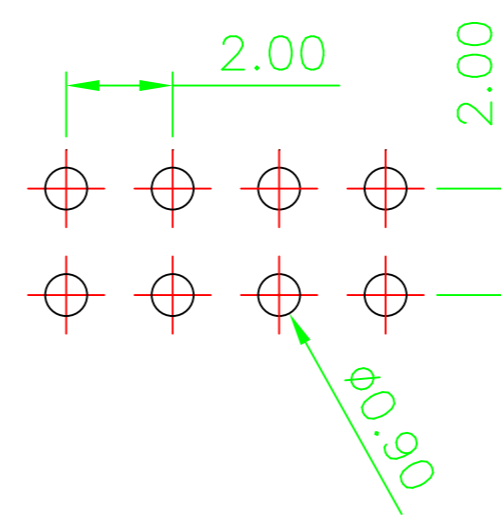


Specifications

Current Rating: 2Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 500V AC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C

Materials

Contact Material: Brass
 Insulation Material: Polyester, UL 94V-0
 Nylon6T
 All materials must meet Geron requirement for environment protection

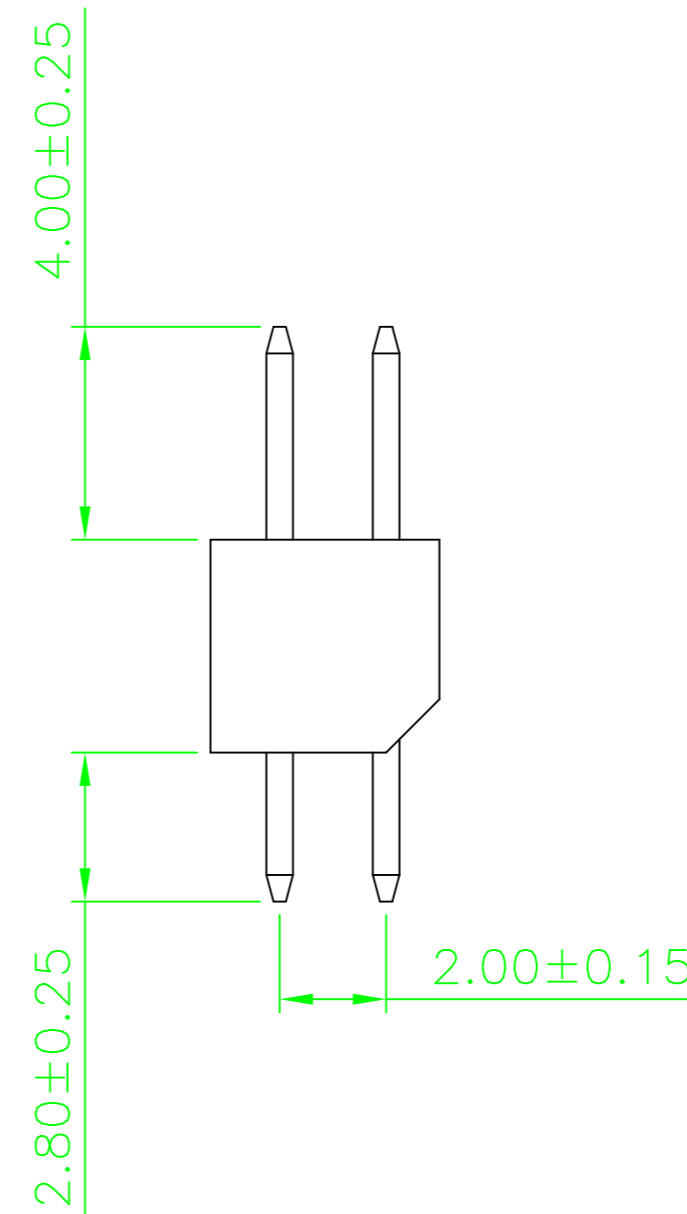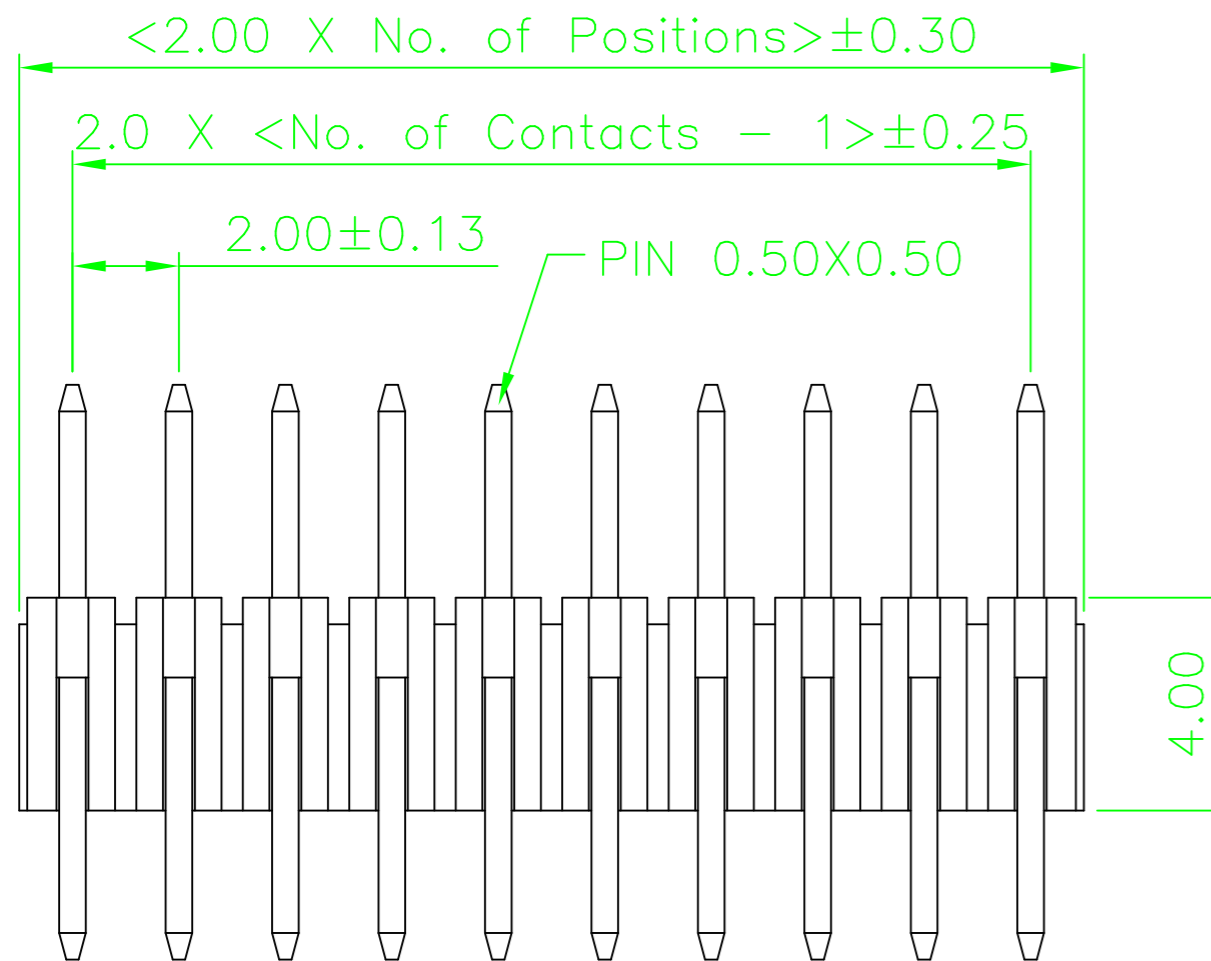

Ordering Information

GRA72 - XX XX Z20

No. of Pins per Row: 02~40 (02)
 Contact Plating:
 01=Tin
 02=Gold Flash
 Duplex plating
 05=Gold Flash /TIN

Geron Electronic Co.,Ltd

GENERAL TOLERANCE

X.° ± 5.0°	X. ± 0.30
.X° ± 3.0°	.X ± 0.25
.XX° ± 2.0°	.XX ± 0.15
.XXX° ± 1.0°	.XXX ± 0.10

DESIGN: ZHOU	DATE: 2010.10.18
CHECKED: WU	DATE: 2010.10.18
AUDITED: YANG	DATE: 2010.10.18
APPROVED: MEI	DATE: 2010.10.18

DWG. NO.	GRA72-Z20
PART NO.	GRA72-XX-XX-Z20

TITLE.	2.00 PIN HEADER DUAL ROWS DIP TYPE BASE 4.0H
--------	--

REV.	UNIT.	SCALE.	PAGE.	
02	mm	1:1	1/1	