


REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
A	NEW	INITIAL RELEASE.	2010-12-10	ZHOU

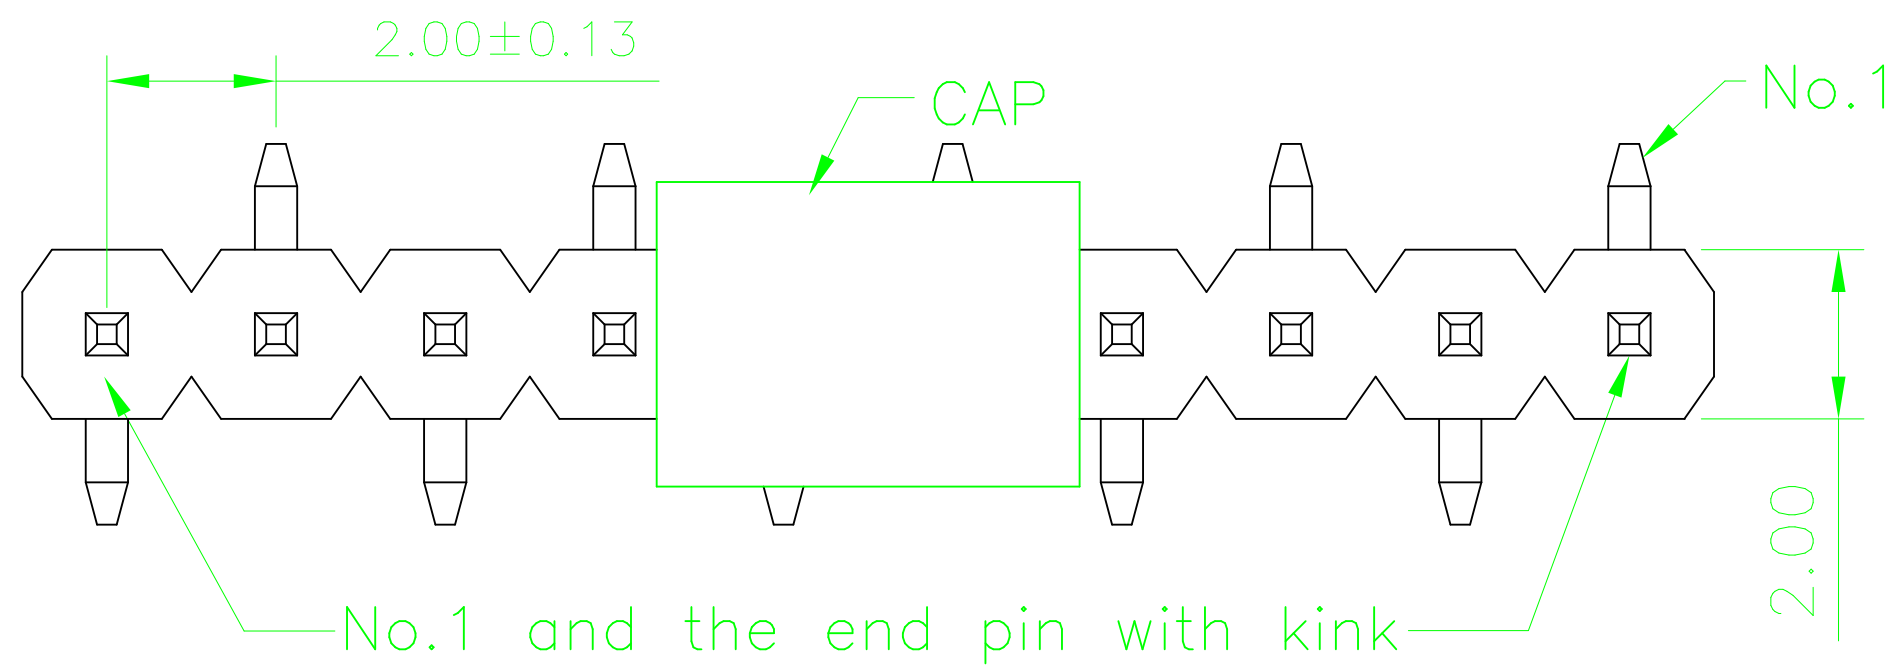

Specifications

Current Rating: 2Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 500V AC/DC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C

Materials

Contact Material: Brass
 Insulation Material: Polyester, UL 94V-0
 Nylon 6T

All materials must be Geron materials




Ordering Information

GRA71 - XX XX ZS21-2 - X

No. of Pins per Row 02~40	Contact Plating 01=Tin 02=Gold Flash Duplex Plating 05=Gold Flash/Tin ...	Options P=cap T=tape reel PT=cap+tape reel
------------------------------	--	---

Recommended P.C.Board Layout

(Tolerance: ±0.05)

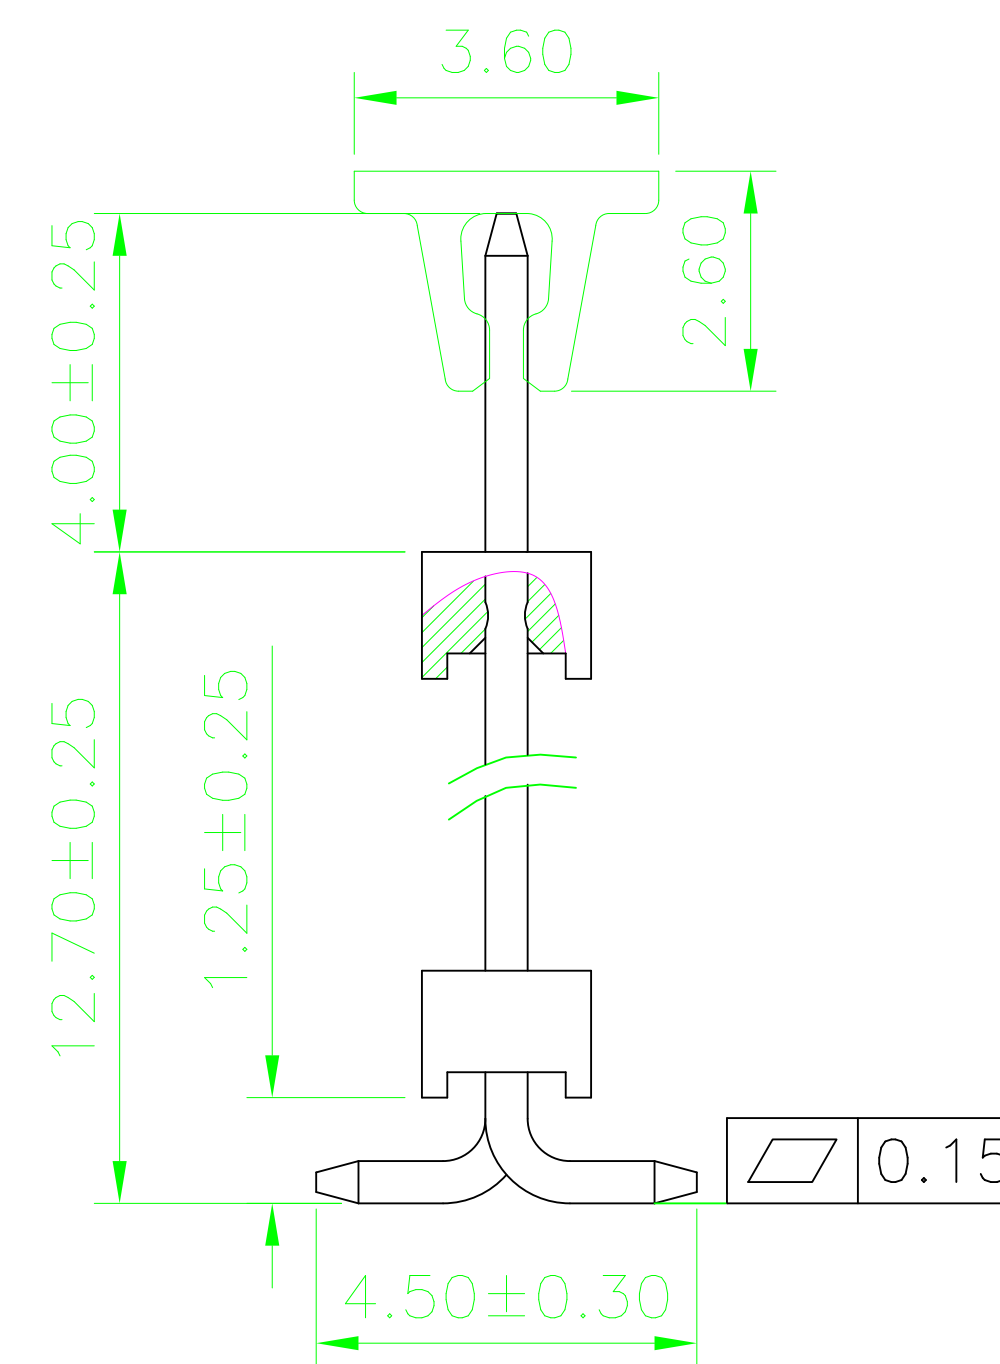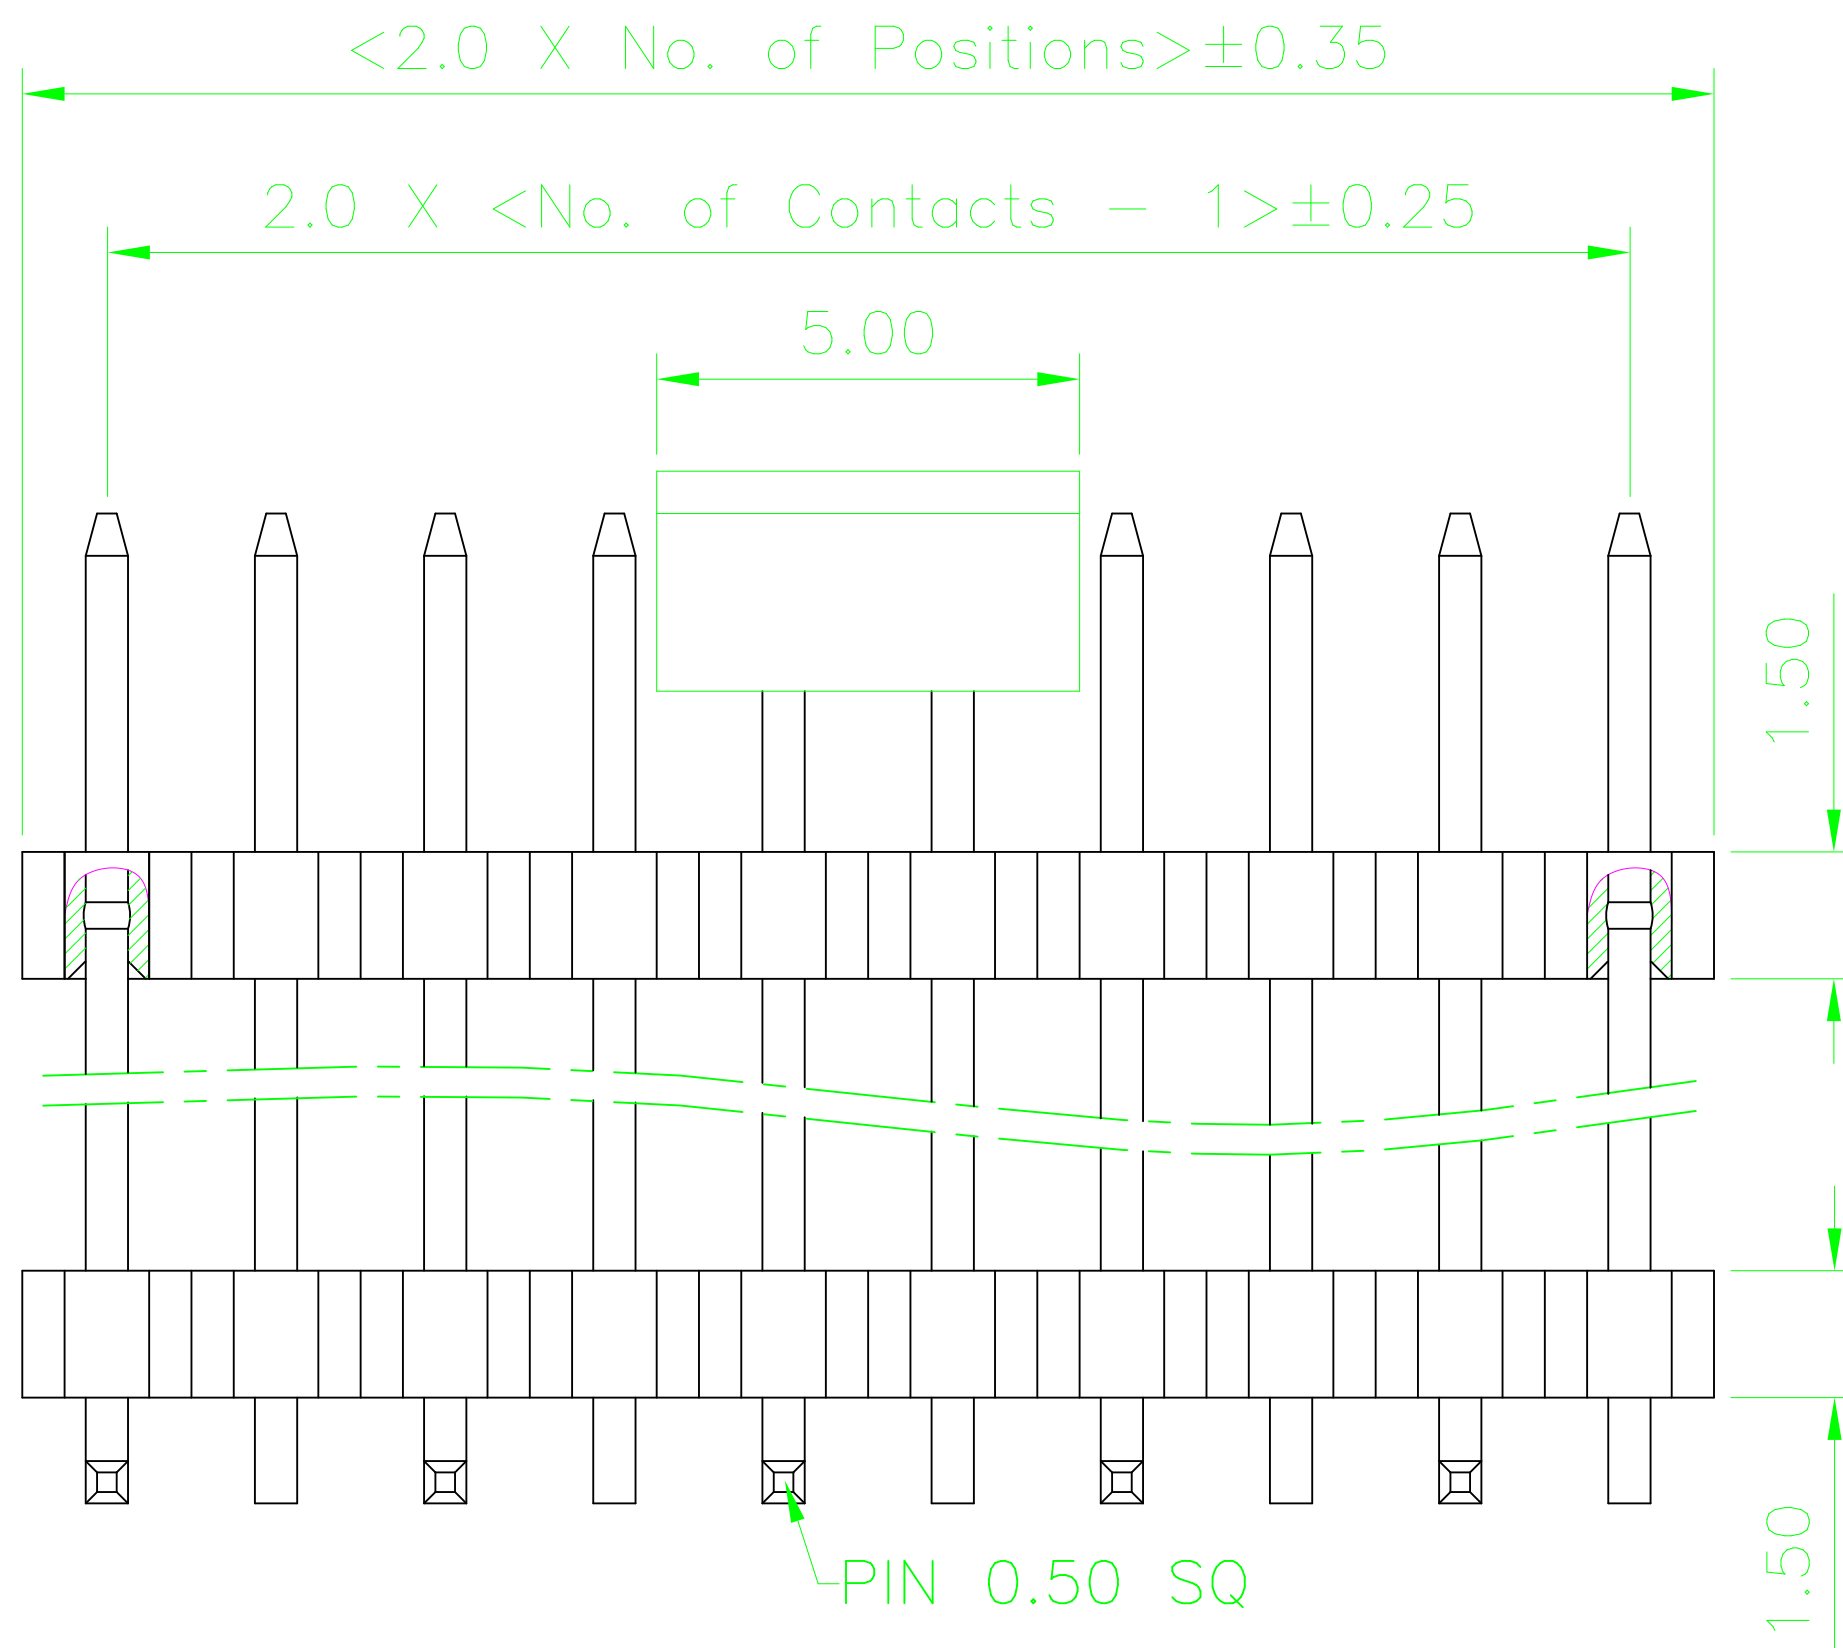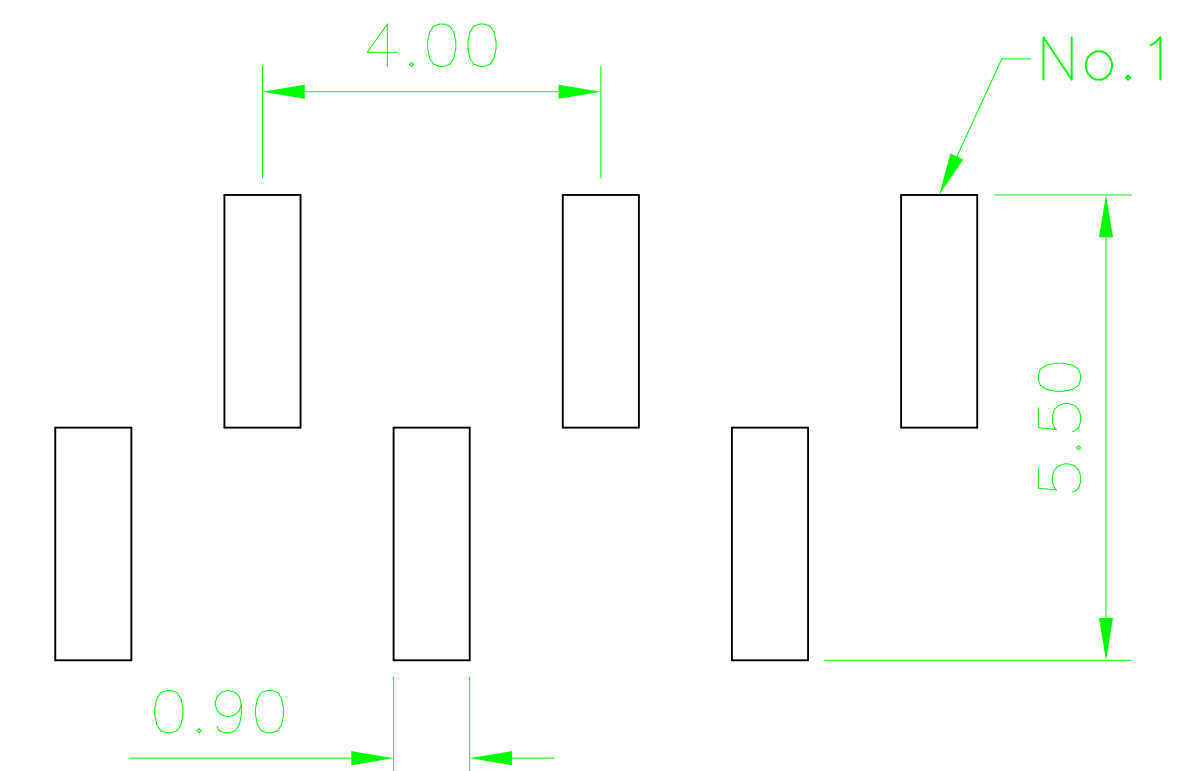

Geron Electronic Co.,Ltd

GENERAL TOLERANCE

X.° ± 5°	X. ± 0.30
.X° ± 3°	.X ± 0.20
.XX° ± 2°	.XX ± 0.15
.XXX° ± 1°	.XXX ± 0.10

DESIGN: ZHOU

DATE: 2010-12.10

DWG. NO.

GRA71-ZS21-2

TITLE.

2.00 PIN HEADER
SINGLE ROW SMT TYPE
CONNECTOR

CHECKED:

DATE:

AUDITED:

DATE:

APPROVED:

DATE:

PART NO.

GRA71-XX-XX-ZS021-2-X

REV.

A

UNIT.

mm

SCALE.

5:1

PAGE.

1/1

