


Specifications
 Current Rating: 2Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 500V AC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C

Materials
 Contact Material: Brass
 Insulation Material: Polyester, UL94V-0
 Nylon 6T
 All materials must be Geron materials

RECOMMENDED P.C.B LAYOUT

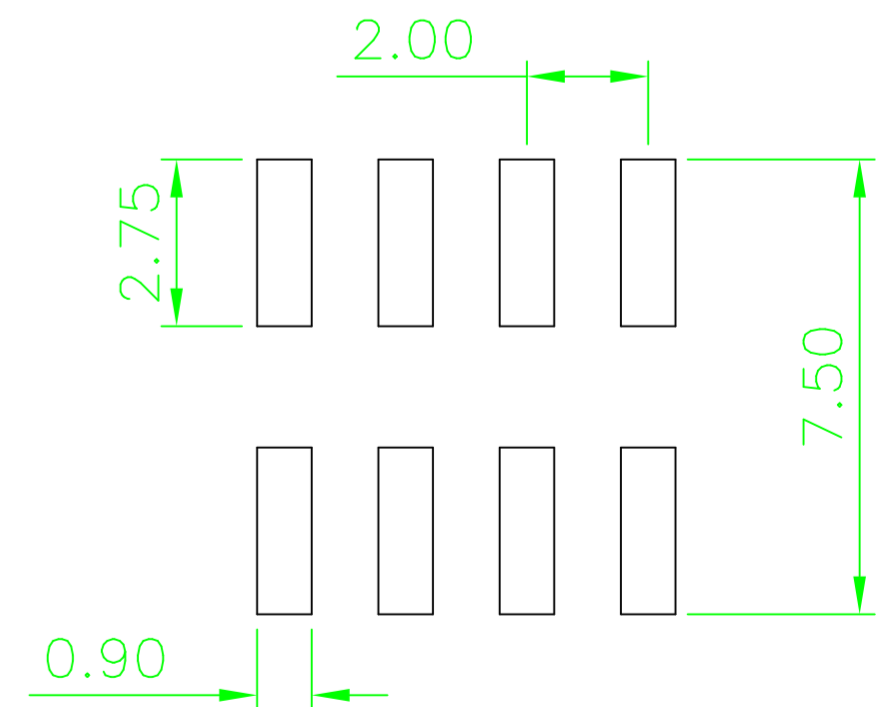

Ordering Information

GRA72 - XX XX ZS08-2

No. of Pins per Row
02~40

Contact Plating
 01=Tin
 02=Gold Flash
 Duplex Plating
 05=Gold Flash/Tin
 ...

Geron Electronic Co.,Ltd

GENERAL TOLERANCE

| | |
|--------------|-------------|
| X.° ± 5° | X. ± |
| .X° ± 2° | .X ± 0.38 |
| .XX° ± 1° | .XX ± 0.25 |
| .XXX° ± 0.5° | .XXX ± 0.13 |

| | | | |
|-----------|------|-------|-----------|
| DESIGN: | ZHOU | DATE: | 01-18-06' |
| CHECKED: | | DATE: | |
| AUDITED: | | DATE: | |
| APPROVED: | | DATE: | |

| | |
|----------|--------------------|
| DWG. NO. | GRA72-ZS08-2 |
| PART NO. | GRA72-XX-XX-ZS08-2 |

| | |
|--------|--|
| TITLE. | 2.00 PIN HEADER DUAL ROWS SMT TYPE BASE 2.0H |
|--------|--|

| | | | | | | |
|------|---|-------|----|--------|-----|--|
| REV. | A | UNIT. | mm | SCALE. | 4:1 | |
|------|---|-------|----|--------|-----|--|