

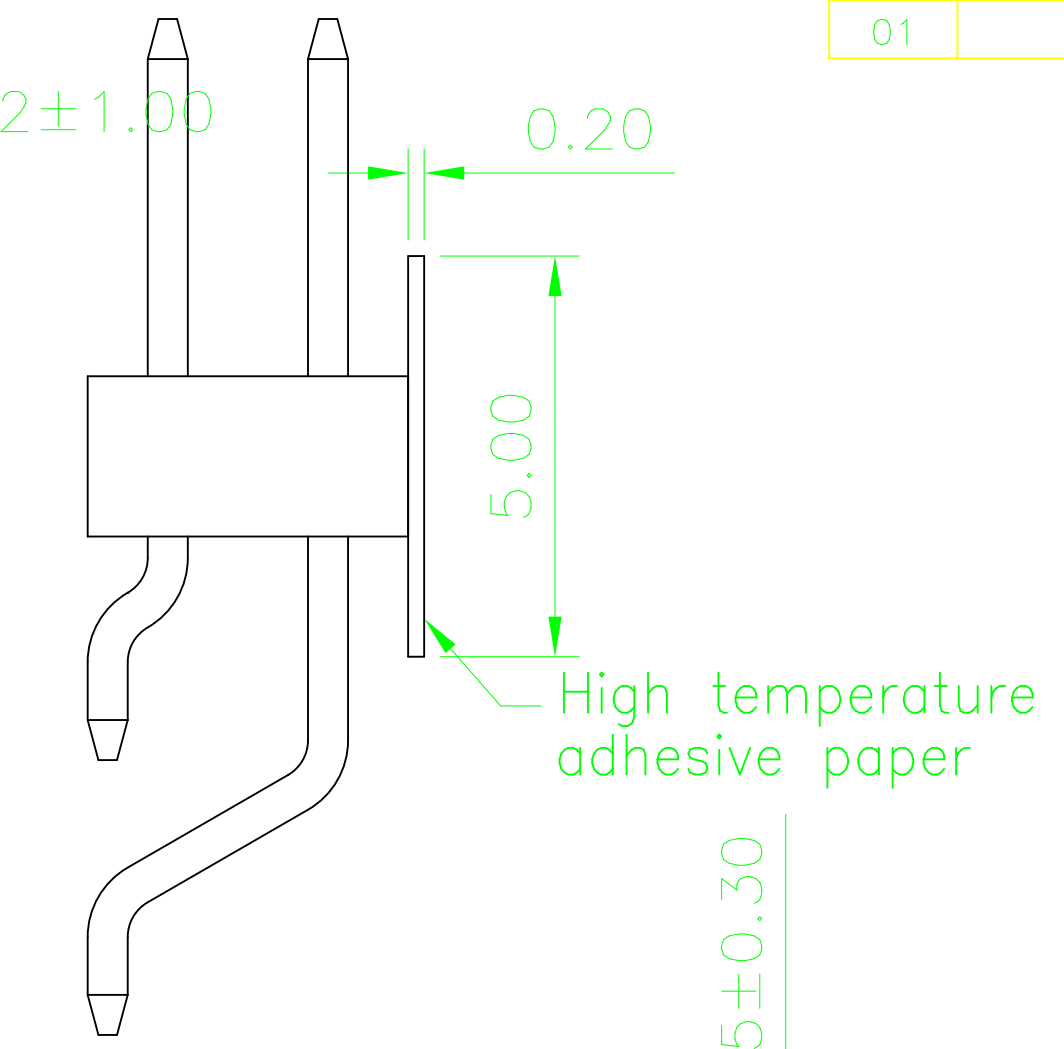
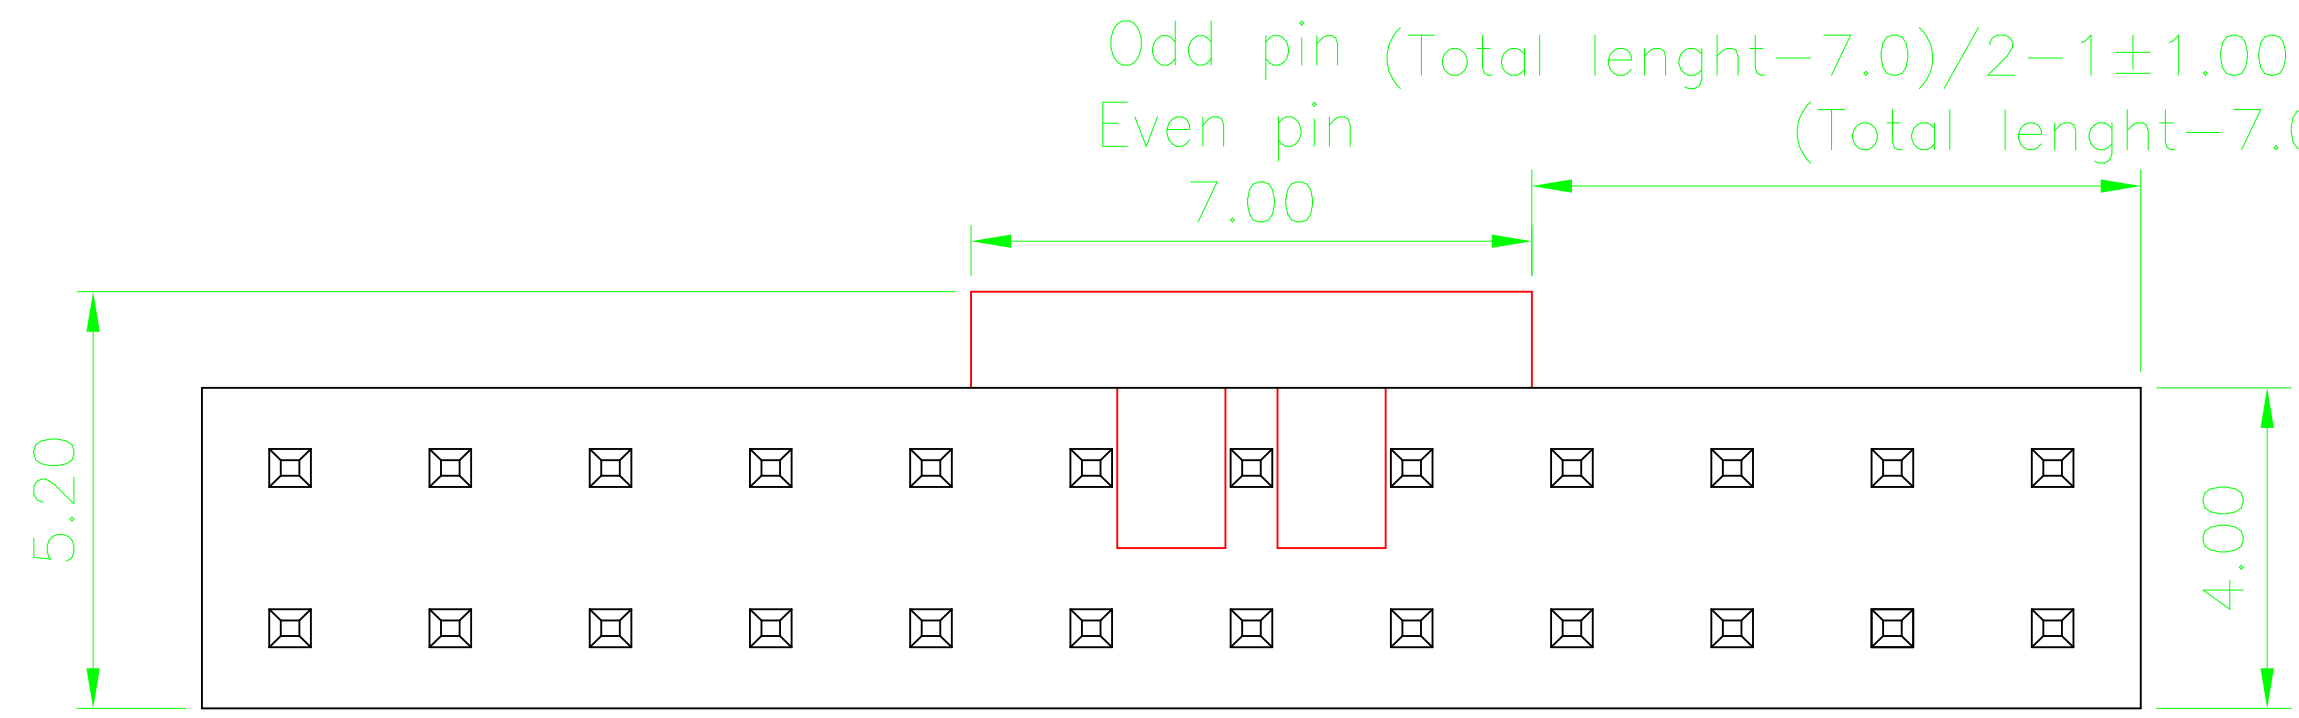


REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01		INITIAL	2010.08.28	ZHOU

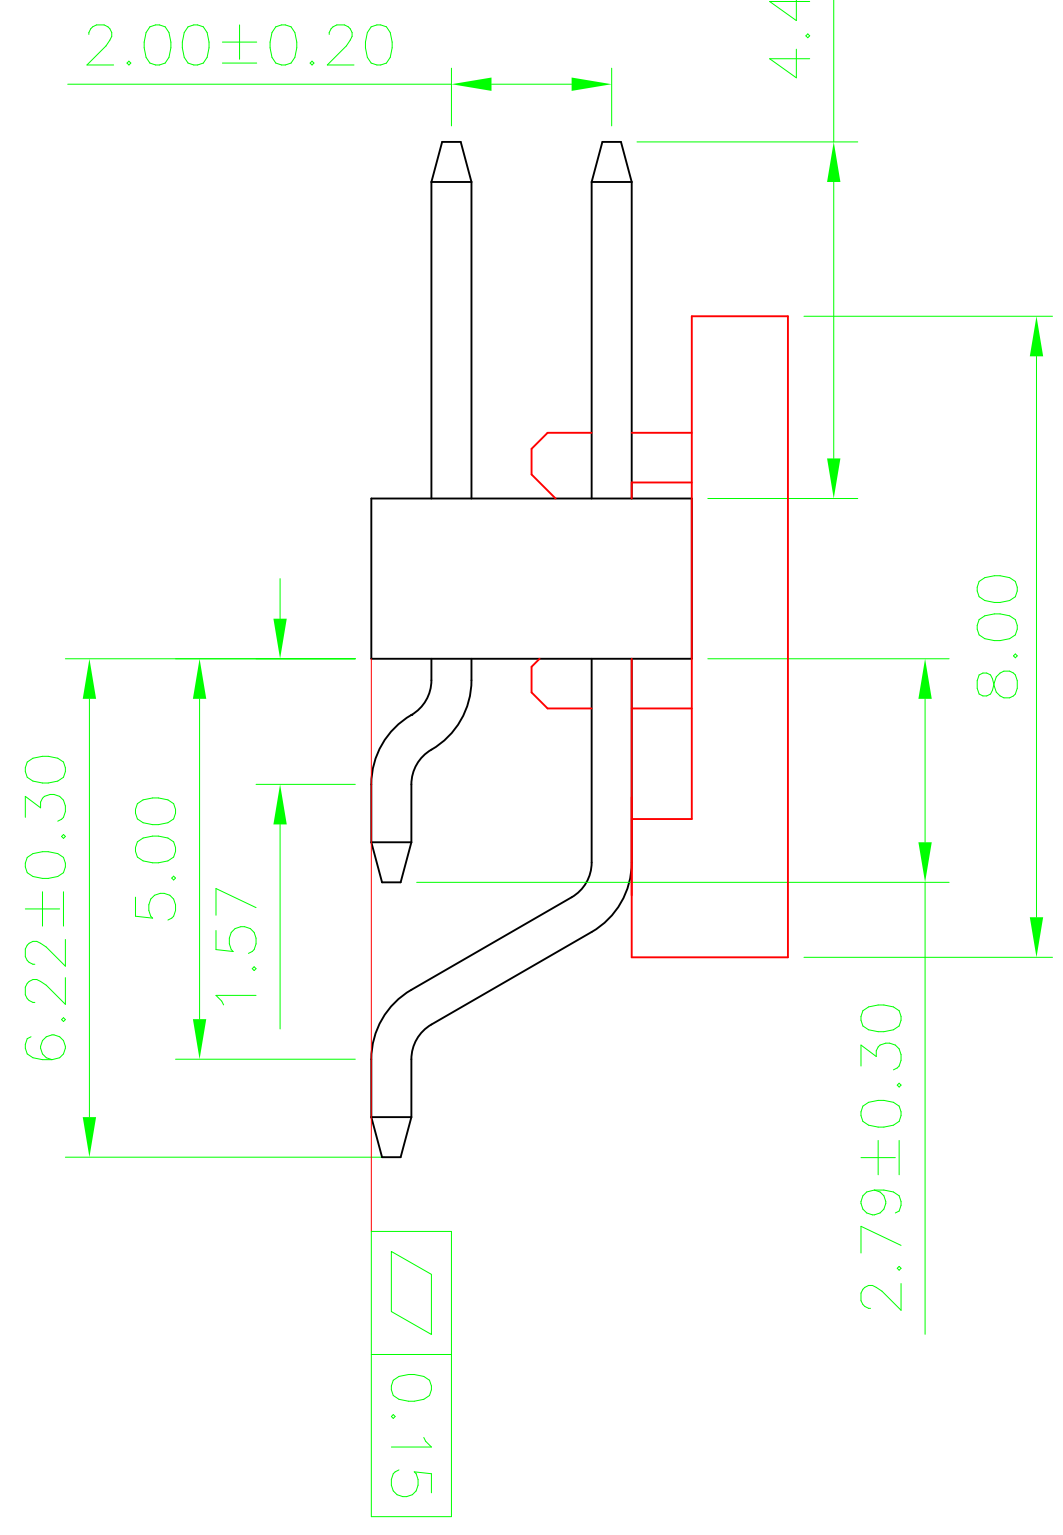


Specifications
 Current Rating: 2Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 500V AC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C

Materials
 Contact Material: Brass
 Insulation Material: Polyester, UL 94V-0
 Nylon 6T(Processing temp.260°C,10sec)
 All materials must be Geron materials

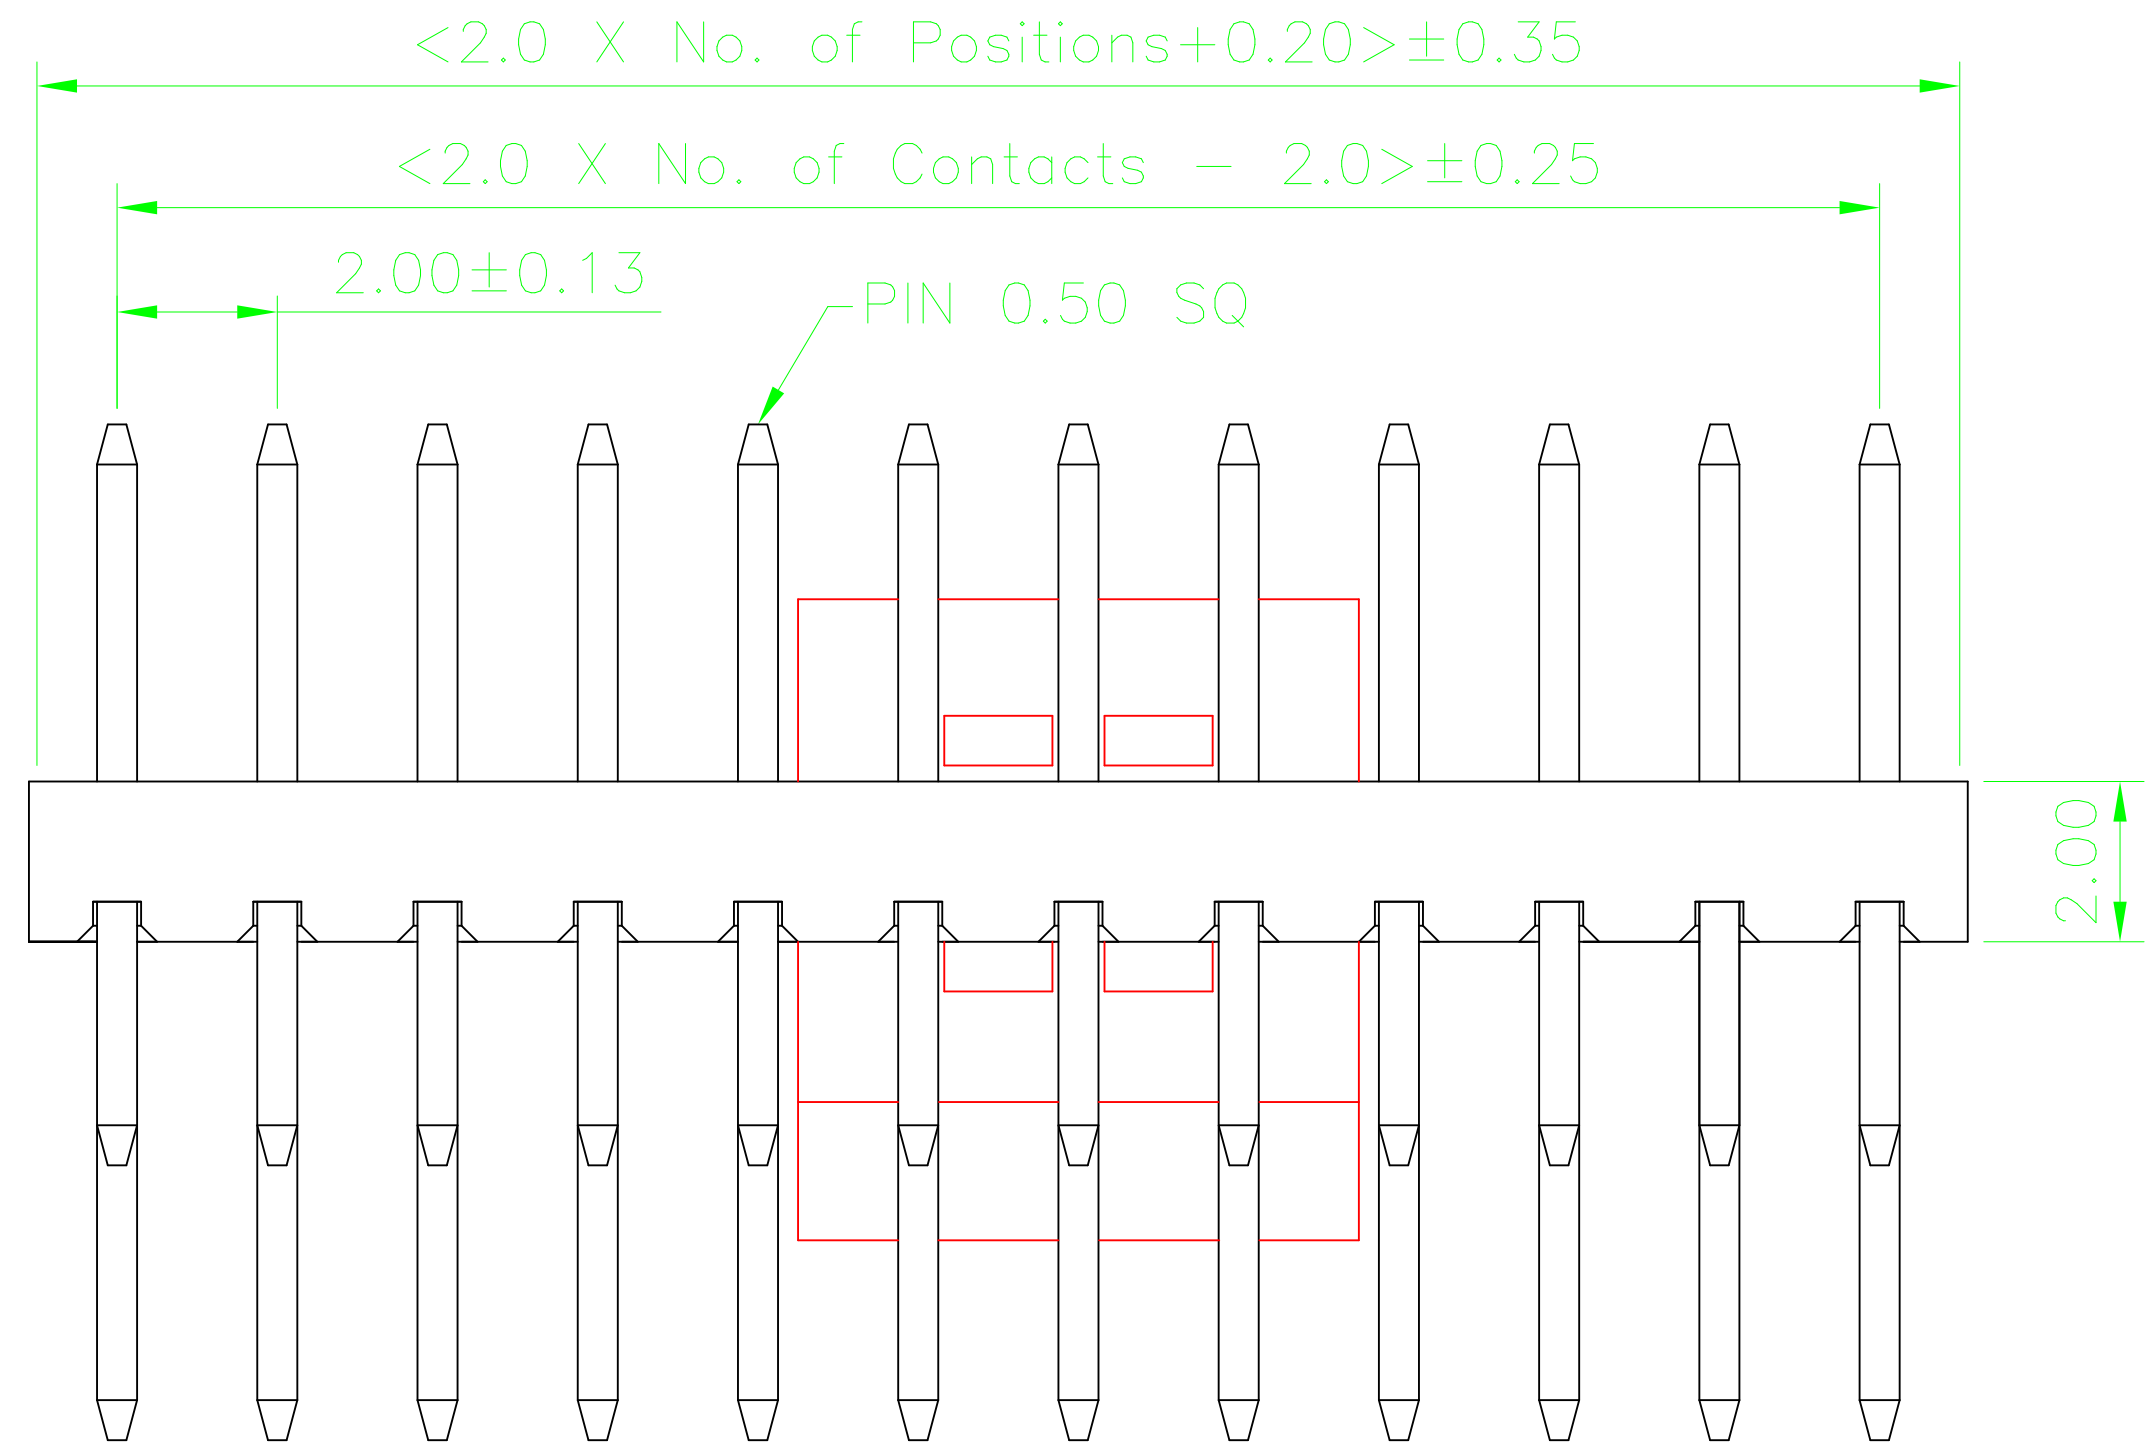

Recommended P.C.Board Layout
 (Tolerance:±0.05)

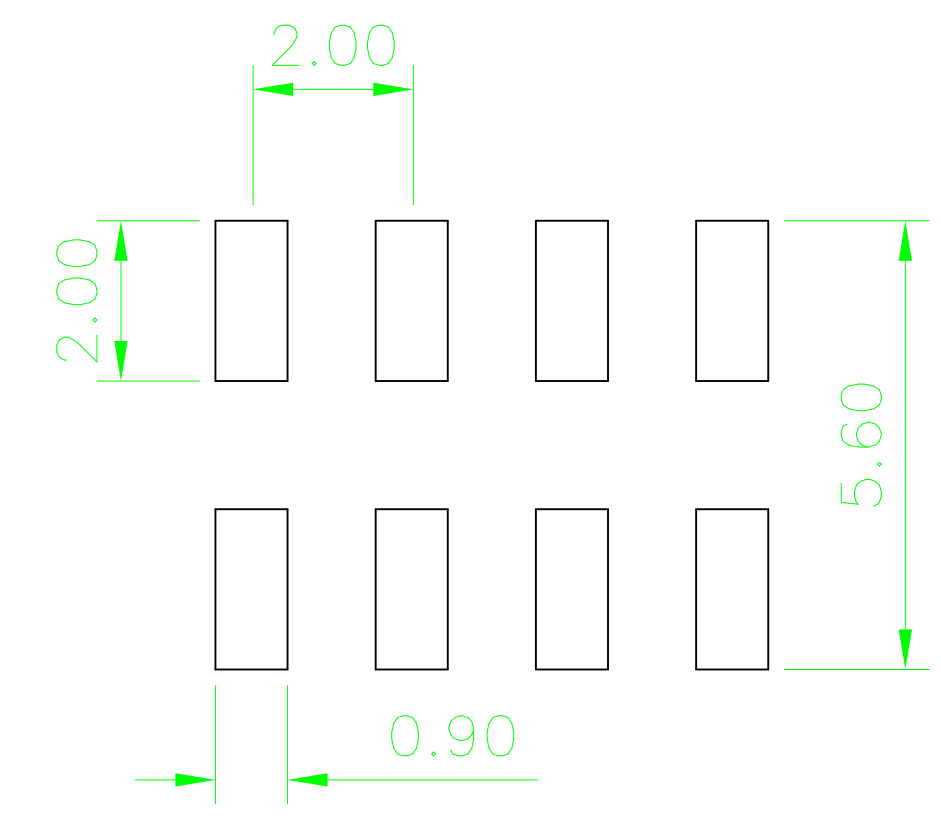

Ordering Information

GRA72 - XX XX WS09 S2 - X

No. of Pins per Row: 02-40
 Contact Plating: 01=Tin, 02=Gold Flash Standard, Duplex Plating, 05=Gold Flash/Tin
 Options: P=cap, T=tape reel, PT=cap+tape reel, C=acetate tape, TC=acetate tape+tape reel

Geron Electronic Co.,Ltd					GENERAL TOLERANCE		DESIGN: ZHOU	DATE: 2010.08.28	DWG. NO.	TITLE: 2.00 PIN HEADER DUAL ROWS SMT TYPE BASE 2.00H
					X.° ± 5°	X. ± 0.30	CHECKED:	DATE:	GRA72-XX-XX-WS09-S2	
REV. 01	UNIT. mm	SCALE. 5:1	PAGE. 1/1			AUDITED:	DATE:	PART NO.	GRA72-XX-XX-WS09-S2-X	
						APPROVED:	DATE:			
				.X° ± 2°	.X ± 0.20					
				.XX° ± 1°	.XX ± 0.15					
				.XXX° ± 0.5°	.XXX ± 0.10					