


REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01		轉環保圖	2010-07-22	許承佑





Recommended P.C.B Layout
(Tolerance:±0.05)



Specifications
 Current Rating: 3Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 600V AC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C


Materials
 Contact Material: Brass
 Insulation Material: Polyester, UL 94V-0 PBT

All materials must meet Geron requirement for environment protection

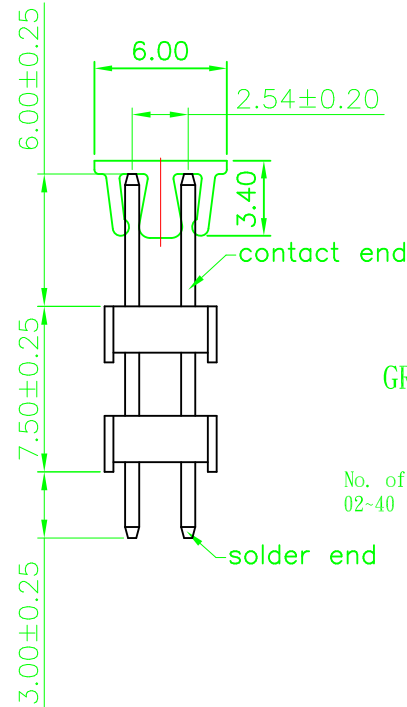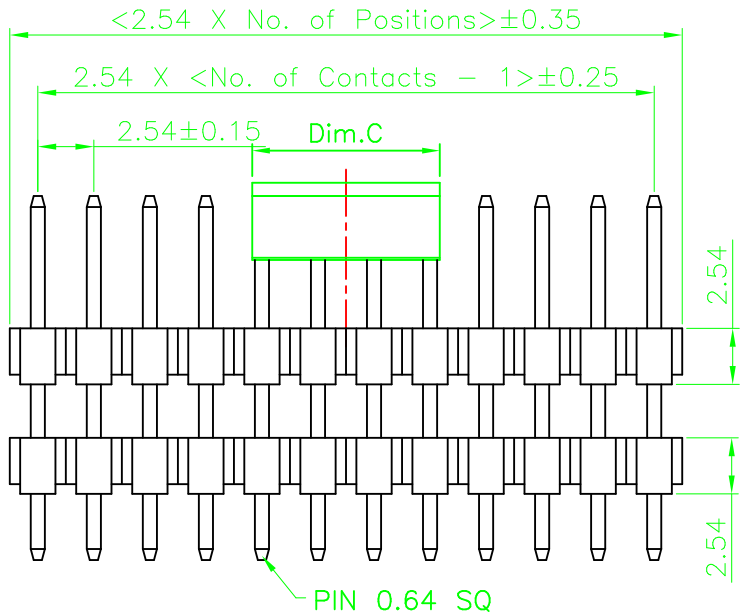

Dim.C	NOTE
5.00mm	02~08pins
8.50mm	09~40pins

Ordering Information

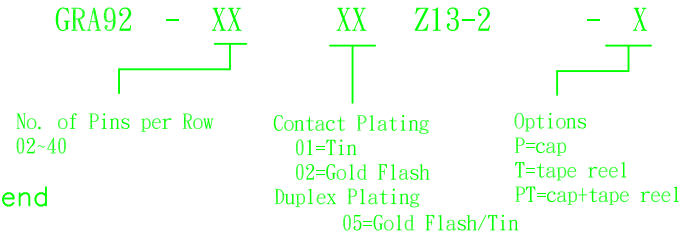

GERON ELECTRONIC CO.,LTD

GENERAL TOLERANCE

X.* ± 5°	X. ± 0.30
.X* ± 3°	.X ± 0.25
.XX* ± 2°	.XX ± 0.15
.XXX* ± 1°	.XXX ± 0.10

DESIGN: zhou	DATE:2010-07-22
CHECKED: wu	DATE:2010-07-22
AUDITED: chen	DATE:2010-07-22
APPROVED: zhang	DATE:2010-07-22

DWG. NO.	GRA92-Z13-2
PART NO.	GRA92-XX-XX-Z13-2

TITLE:
 2.54 PIN HEADER
 DUAL ROWS DIP TYPE
 CONNECTOR

REV.	UNIT.	SCALE.	PAGE.
01	mm	3:1	1/1