
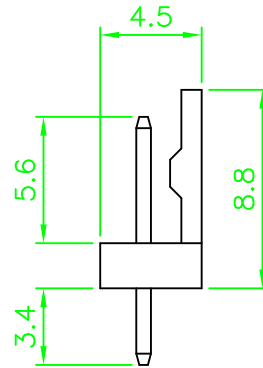
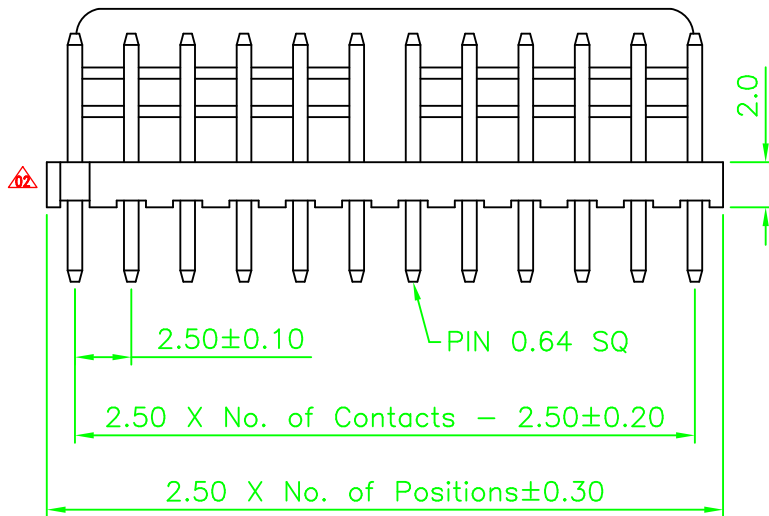


REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	10-12-05'	PI HONG BIN
02	△	修正圖面與實物一致.	2010.08.26	zhou



### Specifications

Voltage Rating: 250V(AC,DC)  
 Current Rating: 3A(AC,DC)  
 Insulation Resistance: 1000MΩ Min.  
 Dielectric Withstanding: 800V AC/minute  
 Contact Resistance: 20mΩ Max.  
 Operating Temperature: -25°C to +85°C


### Wafer

Contact Material: Brass  
 Contact Plating: Tin Plated  
 Base Material: Nylon 66, UL 94V-0  
 All materials must meet Geron requirement for environment protection


### Ordering Information

GRC81 - XX XX Z2510 X

No. of Pins per Row 02-20  
 Contact Plating 01=Tin 02=Gold Flash  
 Color A=BLACK D=WHITE

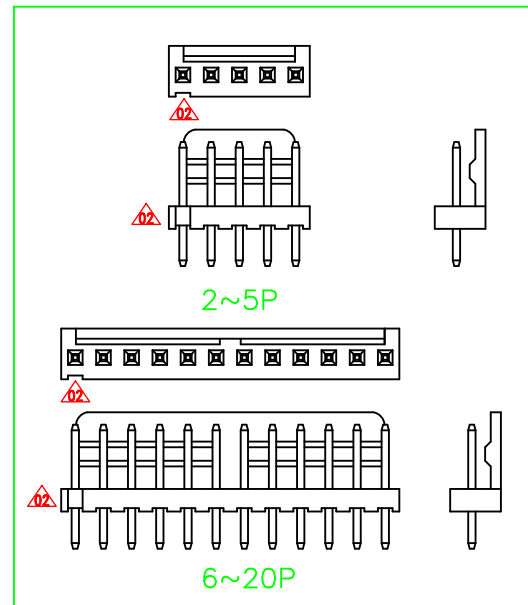

Recommended P.C.Board Hole Layout

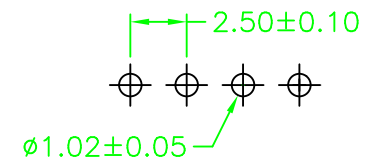

**Geron Electronic Co.,Ltd**

#### GENERAL TOLERANCE

X.* ± 5.0°	X. ± 0.38
.X* ± 3.0°	.X ± 0.30
.XX* ± 2.0°	.XX ± 0.20
.XXX* ± 1.0°	.XXX ± 0.10

DESIGN: zhou

DATE: 2010.08.26

DRAWING

GRC81-Z2510

TITLE

2.50 WAFER

CHECKED:WU

DATE: 2010.08.27

PART NO.

GRC81-XX-XX-2510-X

AUDITED: chen

DATE: 2010.08.27

REV.	UNIT.	SCALE.	PAGE.
02	mm	3:1	1/1