


1 2 3 4 5 6 7 8 9

REV.	DESCRIPTION	DATE

F


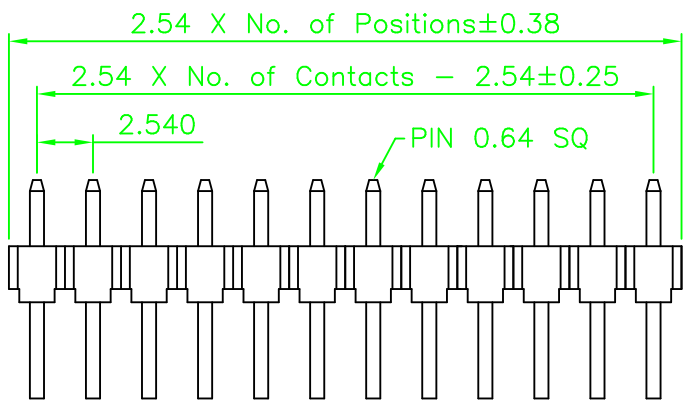


E

**Specifications**  
 Current Rating: 3Amp  
 Insulation Resistance: 1000MΩ Min.  
 Dielectric Withstanding: 600V AC/DC  
 Contact Resistance: 20mΩ Max.  
 Operating Temperature: -40°C to +105°C

**Materials**  
 Contact Material: Brass  
 Insulation Material: Polyester, UL 94V-0  
 Nylon 6T  
 All materials must be Geron materials

D

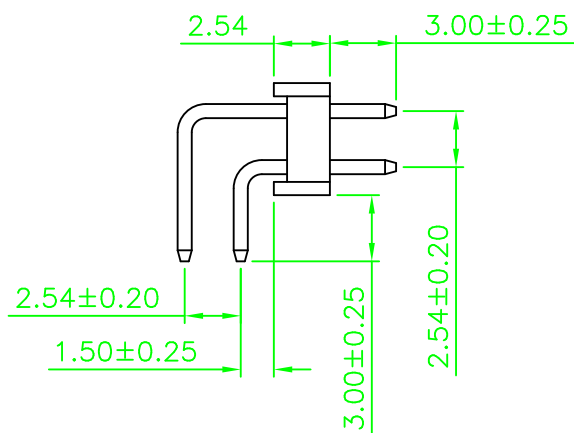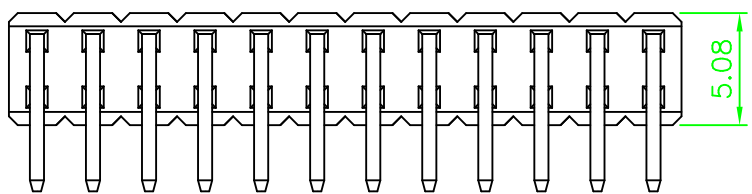


C

**Ordering Information**

GRA92 - XX XX W04 -X  
 No. of Pins per Row 02-40  
 Contact Plating  
 01=Tin  
 02=Gold Flash Standard  
 Duplex plating  
 05=Gold Flash /Tin  
 ...  
 Plastic Color And Shell  
 A= Black  
 C= White

Recommended P.C.Board Hole Layout



B

A

GERON ELECTRONIC CO., LTD

GENERAL TOLERANCE		DESIGN:	DRAWN	DATE:	DATE	DWG. NO.	TITLE.
X.* ± 5*	X. ± .	CHECKED:		DATE:		DWG.NO.	TITLE1
.X* ± 2*	.X ± 0.38	AUDITED:		DATE:		PART NO.	TITLE2
.XX* ± 1*	.XX ± 0.25	APPROVED:		DATE:		PART.NO.	TITLE3
.XXX* ± 0.5*	.XXX ± 0.13						

REV.	UNIT.	SCALE.	SCALE	⊕
REV.	UNIT	SCALE	SCALE	⊕

1 2 3 4 5 6 7 8 9