
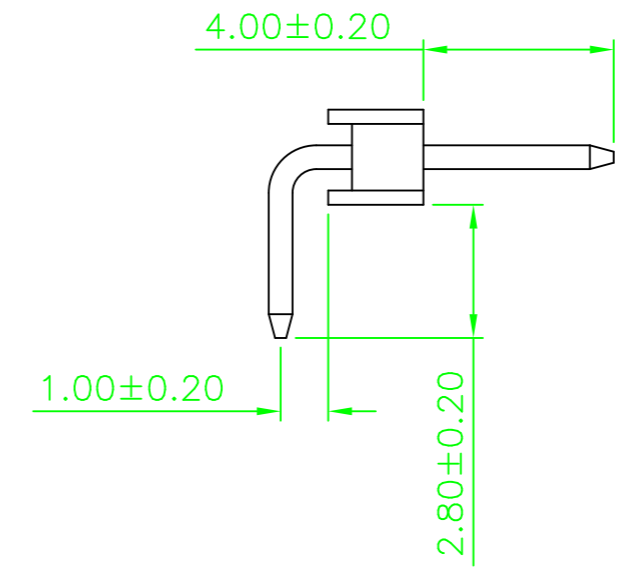
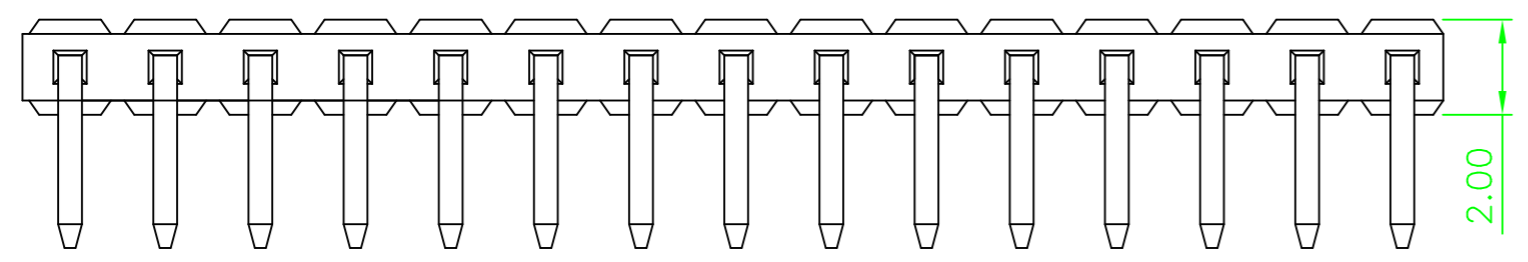


| REV. | DESCRIPTION | DATE |
|------|-------------|------|
|------|-------------|------|

F
E
D
C
B
A

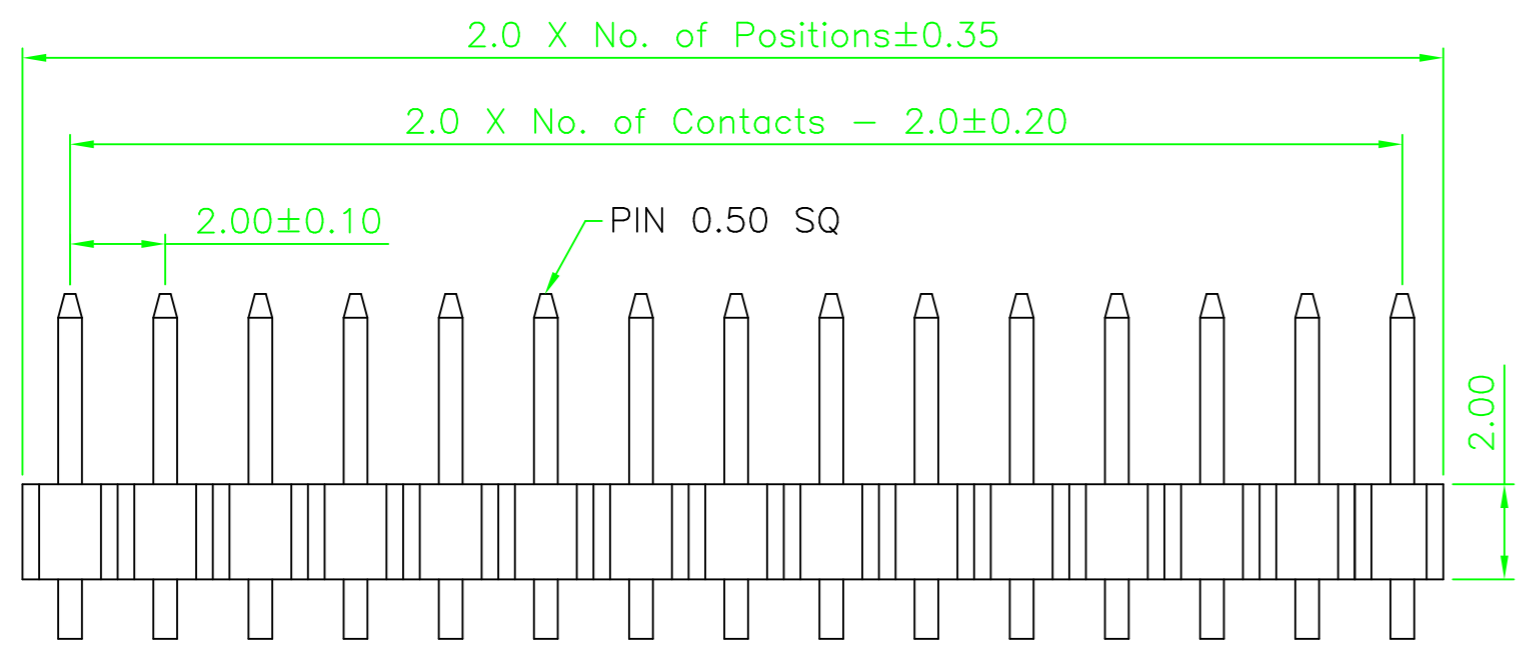

Specifications
 Current Rating: 2Amp
 Insulation Resistance: 1000M Min.
 Dielectric Withstanding: 500V AC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C

Materials
 Contact Material: Brass
 Insulation Material: Polyester, UL94V-0
 Nylon 6T
 All materials must be Geron materials


Ordering Information

GRA71 - XX XX W001

No. of Pins per Row
02~40

Contact Plating
 01=Tin
 02=Gold Flash
 Duplex Plating
 05=Gold Flash/Tin
 ...

Recommended P.C.Board
Hole Layout

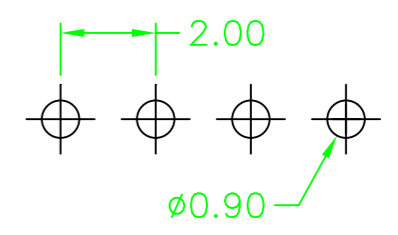

| | | | | | | | | | | |
|----------------------------|------|-------|------|--------|-------------------|---------|---------------|------------|---------------------------|---------------|
| GERON ELECTRONIC CO. ;LTD. | | | | | GENERAL TOLERANCE | | DESIGN: DRAWN | DATE: DATE | DWG. NO. GRA71-W001 | TITLE. TITLE1 |
| | | | | | X.° ± X.° | X. ± .X | CHECKED: | DATE: | PART NO. GRA71-XX-XX-W001 | TITLE2 |
| REV. | REV. | UNIT. | UNIT | SCALE. | SCALE | ⊕ | APPROVED: | DATE: | | TITLE3 |
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | | |