

REV.	DESCRIPTION	DATE

F

E

D

C

B

A

F


E

D



C

B

A

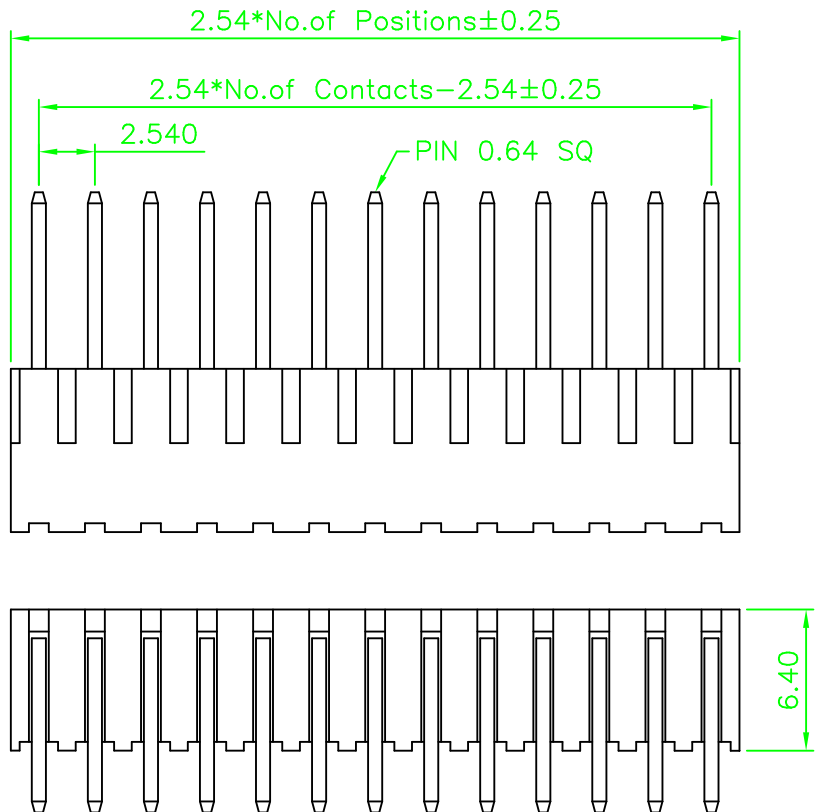

Specifications
 Current Rating: 3Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 600V AC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C
Materials
 Contact Material: Copper Alloy
 Insulation Material: Polyester, UL 94V-0
 P.B.T
 All materials must be Geron materials

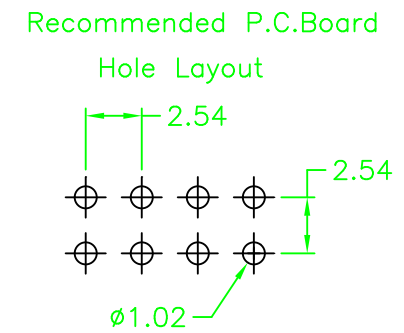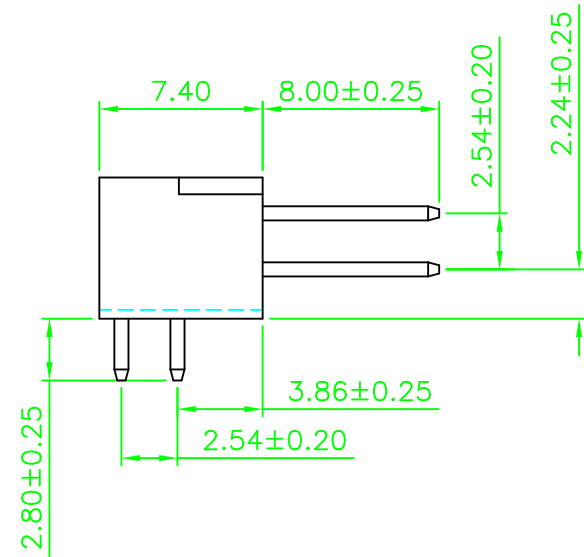

Ordering Information

GRA92 - XX XX W09

No. of Pins per Row 02-40
 Contact Plating
 01=Tin
 02=Gold Flash
 Duplex plating
 05=Gold flash/Tin
 ...

GERON ELECTRONIC CO., LTD				GENERAL TOLERANCE X.* ± X.* X. ± .X .X* ± X. .X ± .X .XX* ± XX. .XX ± .XX .XXX* ± 0.5* .XXX ± .XXX		DESIGN:	DRAWN	DATE:	DATE	DWG. NO.	TITLE:
REV.	REV.	UNIT.	UNIT	SCALE.	SCALE	CHECKED:		DATE:		DWG.NO.	TITLE1
						AUDITED:		DATE:		PART NO.	TITLE2
						APPROVED:		DATE:		PART.NO.	TITLE3