
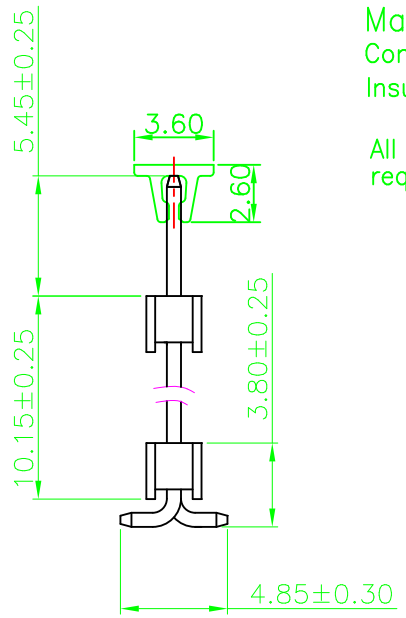
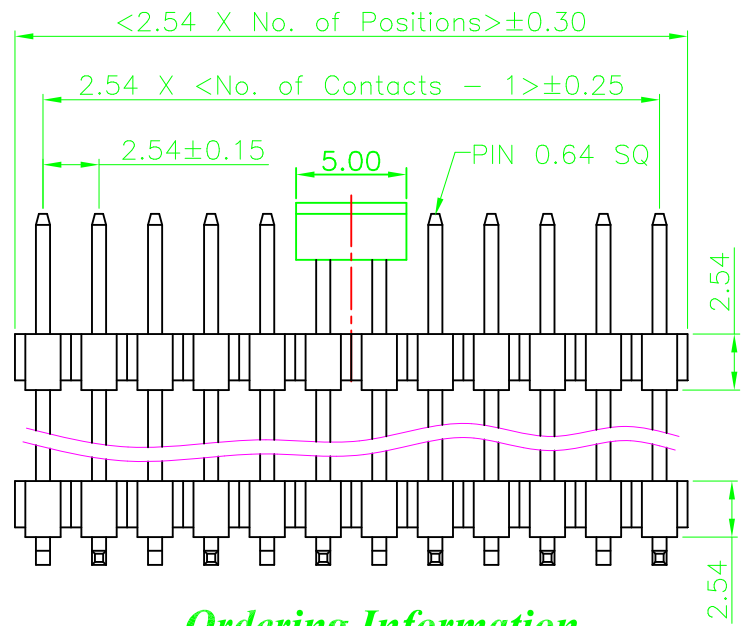


REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
A		INITIAL RELEASE.	2010.5.9	杨月
01		轉量產版	2010.5.9	杨月
02	⚠	新增CAP配方	2010.5.9	zhou

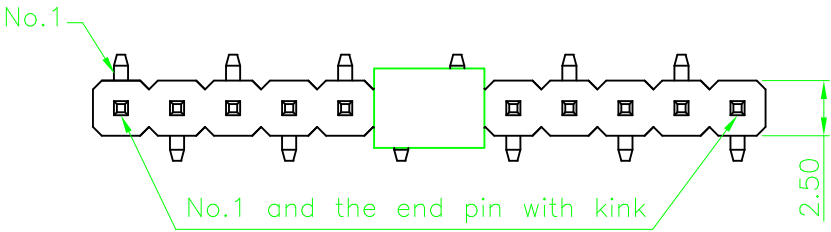

Specifications
 Current Rating: 3Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 600V AC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C


Materials
 Contact Material: Brass
 Insulation Material: Polyester, UL 94V-0
 Nylon 6T
 All materials must meet Geron requirement for environment protection

Ordering Information

GRA91 - XX XX ZS04 - X

- No. of Pins per Row: 02-40
- Contact Plating: 01=Tin, 02=Gold Flash, Duplex plating, 05=Gold flash/Tin
- Options: P=cap, T=tape reel, PT=cap+tape reel

Recommended P.C.B.Layout
 (Tolerance: ±0.05)

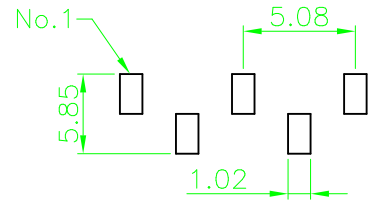

Geron Electronic Co.,Ltd

GENERAL TOLERANCE	
X.* ± 5°	X. ± 0.30
.X* ± 3°	.X ± 0.25
.XX* ± 2°	.XX ± 0.15
.XXX* ± 1°	.XXX ± 0.10

DESIGN: 张海滨	DATE: 2010.5.8
CHECKED:	DATE:
AUDITED:	DATE:
APPROVED:	DATE:

DWG. NO.	GRA91-ZS04
PART NO.	GRA91-XX-XX-ZS04-X

TITLE:
 2.54 PIN HEADER
 SINGLE ROW SMT TYPE
 CONNECTOR

REV. 02	UNIT. mm	SCALE. 3:1	PAGE. 1/1	
---------	----------	------------	-----------	--