

Specifications

Current Rating: 3Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 600VAC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C

Materials


Contact Material: Copper alloy
 Insulator Material: Polyester, UL94V-0
 NYLON-6T
 All materials must be Geron materials

Ordering Information

GRA92 - XX XX ZS03

No. of Pins per Row 02-40
 Contact Plating
 01=Tin
 02=Gold Flash Standard
 Duplex plating
 05=Gold flash/tin
 ...

Recommended P.C.Board Layout

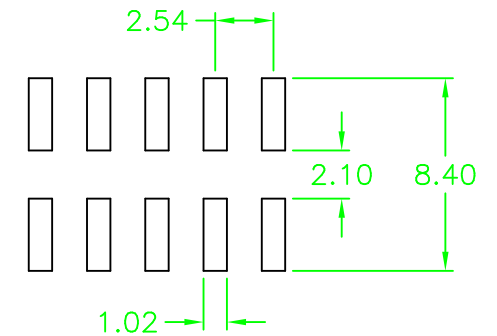

GERON ELECTRONIC CO.,LTD

GENERAL TOLERANCE	
X. ± X. ±	.X ° ± .X ±
X. ± X. ±	.X ± .X ±
XX. ± XX. ±	.XX ± .XX ±
XXX. ± XXX. ±	.XXX ± .XXX ±

DRAWN	DRAWN	DATE	DATE
CHECK		DATE	
APPROVE		DATE	

DWG. NO.	DWG.NO.
PART NO.	PART.NO.

TITLE	TITLE1
	TITLE2
	TITLE3

REV.	REV.	UNIT	UNIT	SCALE	SCALE
------	------	------	------	-------	-------

