


Recommended P.C.Board
Hole Layout

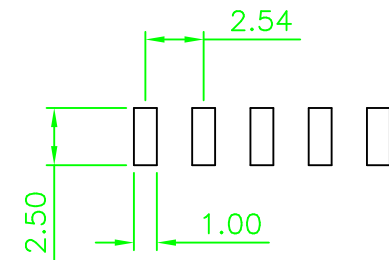

Specifications

Current Rating: 3Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 600V AC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C

Materials

Contact Material: Copper Alloy
 Insulation Material: Polyester, UL 94V-0
 NYLON 6T

All materials must be Geron materials

Ordering Information

GRA91 - XX XX WS 01

No. of Pins per Row: 02-40
 Contact Plating:
 01=Tin
 02=Gold Flash
 Duplex plating
 05=Gold Flash /Tin
 ...

Geron Electronic Co.,Ltd

REV.	01	UNIT	mm	SCALE	3=1	
------	----	------	----	-------	-----	--

GENERAL TOLERANCE	
X. ± 5°	.X ° ±
X. ± 2°	.X ± 0.38
XX. ± 1°	.XX ± 0.25
XXX. ± 0.5°	.XXX ± 0.13

DRAWN	ZHANG	DATE	10.5.16
CHECK		DATE	
APPROVE		DATE	

DWG. NO.	GRA91-WS01
PART NO.	GRA91-XX-XX-WS01

TITLE	2.54 PIN HEADER SINGLE ROW SMT TYPE BASE 2.54H
-------	------------------------------------------------------